


# FieldBarrier® for Cabinet Installation

## R4D0-FB-IA\*



- 8 ... 12 outputs Ex ia IIC, FISCO and Entity
- Advanced fault isolation and diagnostics at the spur
- FieldBarrier in Zone 1/Div. 2
- Instruments in Zone 0...1/Div. 1
- For FOUNDATION Fieldbus H1 and PROFIBUS PA
- Supports plug-in surge protectors
- Very compact, small footprint
- Designed for high reliability




FieldConnex® FieldBarrier®



### Function

The FieldBarrier is a diagnostic-enabled, isolated device coupler for DIN rail mounting and connects 8 ... 12 instruments with intrinsic safety. At the spur, advanced fault protection isolates conditions such as short circuit, jabber, or bounce. Advanced Diagnostics at the spur detect installation quality issues for optimum segment availability. Internal components such as the terminator are connected without wiring. Connections requiring maintenance are minimized. Critical components are designed with redundancy or monitored for degradation. All attributes ensure high product integrity. The FieldBarrier supports diagnostic-enabled accessories such as enclosure leakage sensors and surge protectors. They all transmit fault and diagnostic information to the control room indicating the affected spur. All features contribute to simplified installation, troubleshooting and increased plant up-time.

### Connection

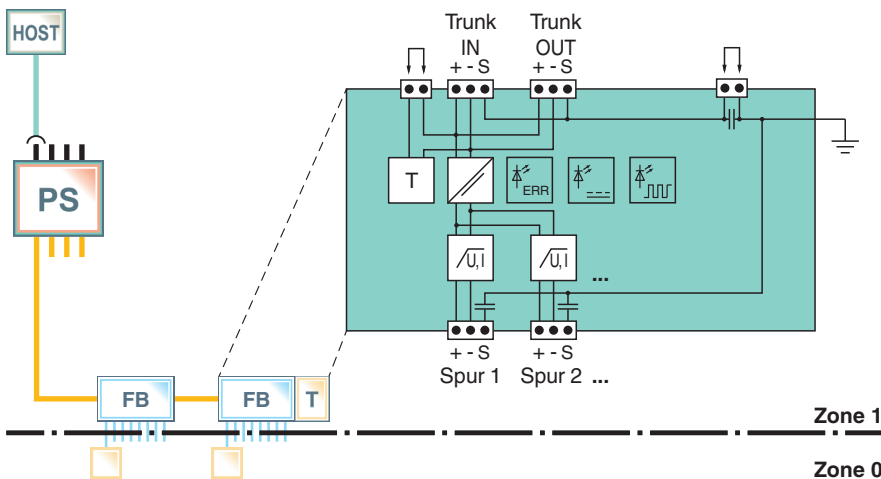

### Technical Data

General specifications	
Design / Mounting	Cabinet installation
Fieldbus interface	
Power dissipation	see table 1
Main cable (Trunk)	
Rated voltage	16 ... 32 V DC , min. 15 V in case of brown out
Rated current	trunk IN to trunk OUT max. 2 A see table 1

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Technical Data

Cable screen grounding option	Capacitive via 5.7 nF Direct
Voltage drop	trunk IN to trunk OUT 100 mV max.
Number of couplers	max. 3 per segment
Reverse polarity protection	Built-In
<b>Outputs</b>	
Number of outputs	8, 10 or 12
Number of devices per output	1
Cable length	120 m
Rated voltage	10 ... 14 V
Rated current	max. 43 mA at one spur , max. 320 mA total current at all spurs
Short-circuit current	53 mA , 1 mA in fallback state
Cable screen grounding option	Capacitive via 4.4 nF
Surge protection	Trunk overvoltage protection if voltage exceeds typ. 39 V, max. 41 V
<b>Diagnostic and Protection Features</b>	
Fault Isolation	Short Circuit Current Limitation at spurs Bounce Protection at spurs Signal inhibit at spurs
Physical Layer Diagnostic	Signal level at spurs Signal jitter at spurs Noise level at spurs
<b>Indicators/operating means</b>	
Switch	S1 ON: diagnostic alarms activated S2 ON: diagnostic warnings activated S3-S8: not used
LED PWR	green: Fieldbus voltage > 16 V
LED COM/ERR	yellow flashing: fieldbus communication and physical layer status , red: Hardware error
LED SPURS	red: 2 Hz flashing in short-circuit condition
<b>Galvanic isolation</b>	
Main wire/outputs	isolation is not affected by interference according to EN 60079-11, voltage peak value 375 V
Output/Output	No Isolation
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013
<b>Standard conformity</b>	
Electromagnetic compatibility	NE 21:2011
Degree of protection	IEC/EN 60529
Fieldbus standard	IEC 61158-2
Climatic conditions	IEC 60721
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
<b>Ambient conditions</b>	
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	< 95 % non-condensing
Shock resistance	15 g 11 ms
Vibration resistance	1 g , 10 ... 150 Hz
Corrosion resistance	acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Connection type	pluggable , screw terminal or spring terminal
Core cross-section	see table 2
Housing material	Polycarbonate
Degree of protection	IP20 , IP30 for Ex-e terminal cover

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

Mass		2100 g
Dimensions		see dimensions
Mounting		DIN rail mounting and wall mounting
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		BVS 13 ATEX E 121 X
Marking		Ⓜ II 2 (1)G Ex e ib mb [ia Ga] IIC T4 Gb , Ⓜ II 2 G (1D) Ex e ib mb [ia IIIC Da] IIC T4 Gb
<b>Main cable (Trunk)</b>		
Maximum safe voltage $U_m$		253 V AC
<b>Outputs</b>		
in accordance to FISCO and Entity		
Power	$P_o$	1.063 W
Voltage	$U_o$	17.1 V
Current	$I_o$	248.55 mA
Inductance	$L_o$	gas group IIC 470 $\mu$ H , gas group IIB 2 mH
Capacitance	$C_o$	gas group IIC 367 nF , gas group IIB 2.15 $\mu$ F
<b>Directive conformity</b>		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-7:2007 , EN 60079-11:2012 , EN 60079-18:2009
<b>International approvals</b>		
CSA approval		CSA 14.70004139
Control drawing		116-0400
Approved for		Class I, Division 2, Groups A, B, C, D T4 Class I, Zone 1, AEx/Ex e ib mb [ia Ga] IIC T4 Gb Class I, Zone 1, AEx/Ex e ib mb [ia IIC Da] IIC T4 Gb Associated equipment for Class I, Division 1 Groups A, B, C, D Associated equipment for Class II, Division 1 Groups E, F, G Associated equipment for Class III, Division 1
IECEX approval		IECEX BVS 13.0119X
Approved for		Ex e ib mb [ia Ga] IIC T4 Gb , Ex e ib mb [ia IIIC Da] IIC T4 Gb
<b>Certificates and approvals</b>		
FOUNDATION Fieldbus		FF-846
Marine approval		DNV A-14038
<b>General information</b>		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

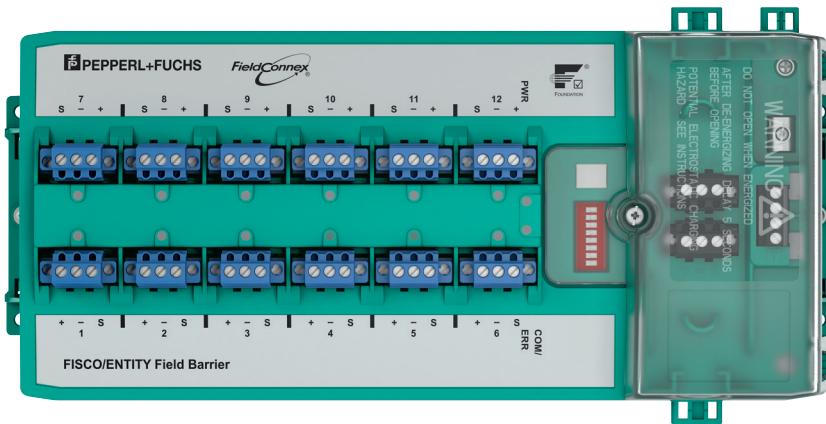

**Matching System Components**

	<b>F.FB1.S14.A**.1.*.***.***.</b> ****
	<b>F.FB1.P14.A**.1.*.***.***.</b> ****

**Accessories**

	<b>F*-LBF-D1.32</b>	
	<b>FN-LBF-D1.32</b>	Surge Protector for Field Mounting, Ex d, 1/2" NPT Thread
	<b>FS-LBF-D1.32</b>	Surge Protector for Field Mounting, Ex d, ISO 20 mm Thread
	<b>SCP-LBF-IA1.36.IE*</b>	
	<b>SCP-LBF-IA1.36.IE.0</b>	Surge Protector, Pluggable onto the device coupler for the Spur, Ex ia
	<b>SCP-LBF-IA1.36.IE.1</b>	Surge Protector, Pluggable onto the device coupler for the Spur, Ex ia with Integrated Diagnostics
	<b>ACC-LBF-EB.6</b>	6x Grounding Rail for Surge Protection, SCP-LBF*, R2-SP*, and R4D0-FB*
	<b>ELS-1</b>	Housing leakage sensor, for operation with FOUNDATION Fieldbus and PROFIBUS PA
	<b>MFT-2L.1600</b>	Multifunction terminal, 4-pin, 2 x bridges

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Accessories



**MFT-BASE.4P**

Multifunction terminal socket, 4-pin

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

## Type Code

### Type of housing

**R4D0** DIN rail device coupler

### Function

**FB** FieldBarrier

### Type of protection

**IA** intrinsically safe "Ex ia"

### Number of outputs

- 08** 8 spurs
- 10** 10 spurs
- 12** 12 spurs

### Connection options

- 0** Pluggable connectors with screw terminals,
- 1** Pluggable connectors with spring terminals

<b>R4D0</b>	<b>-</b>	<b>FB</b>	<b>-</b>	<b>IA</b>			
<b>A</b>	<b>-</b>	<b>B</b>	<b>-</b>	<b>C</b>	<b>D</b>	<b>.</b>	<b>E</b>

## Additional Information

### Dimensions

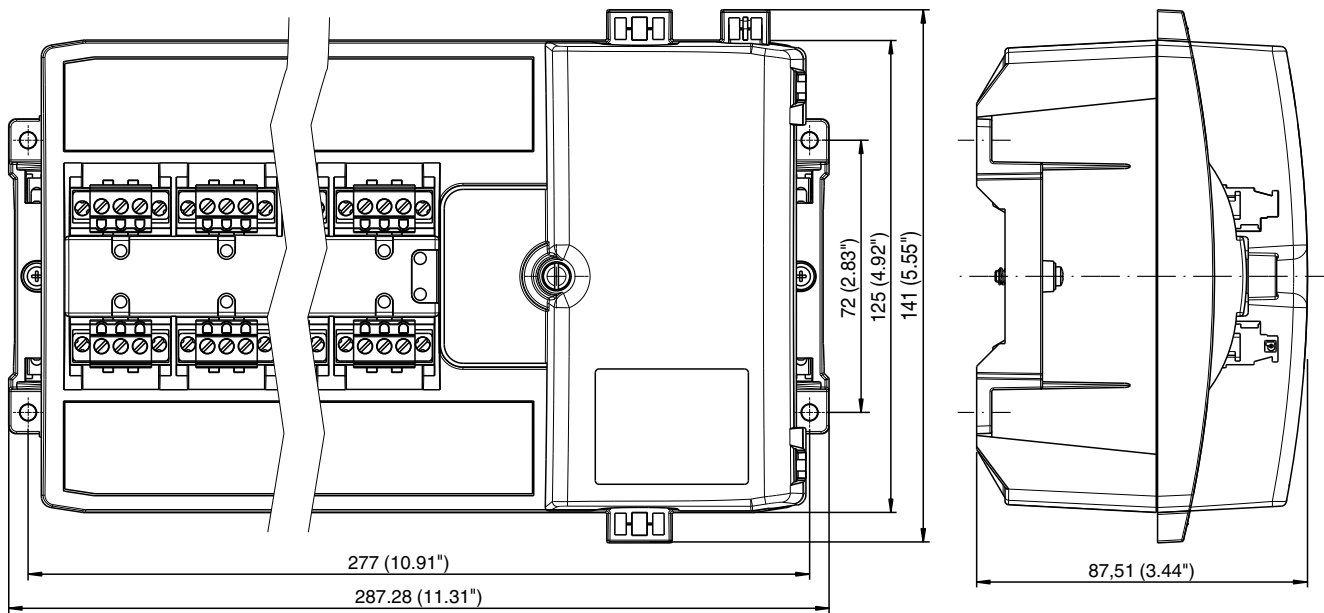


Figure 1: housing dimensions

All dimensions in mm (inches) and without tolerance indication.

### Assembly

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

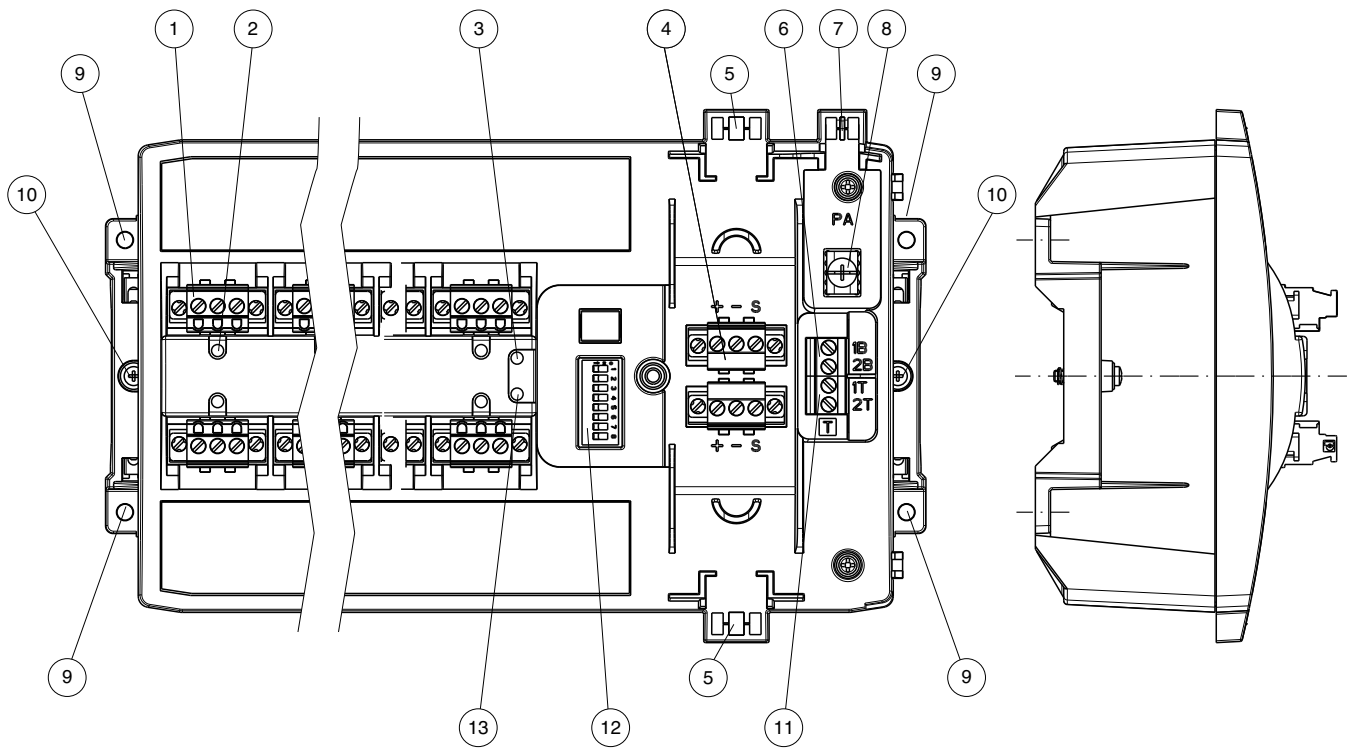


Figure 2: component overview

Description:

- 1 Spur connectors (\* no. of spurs)
- 2 Spur LEDs (\* no. of spurs)
- 3 PWR-LED
- 4 Trunk connection
- 5 Cable ties fixture for trunk cable (\* 2)
- 6 Terminal for cable shield grounding configuration
- 7 Cable ties fixture for grounding cable
- 8 Grounding terminal
- 9 DIN rail mounting fixture (\* 2)
- 10 Hole for wall mounting (\* 4)
- 11 Terminal for terminator configuration
- 12 DIP switches for diagnostic configuration (1-2 in use, 3-8 n/a)
- 13 LED COM/ERR (communication/diagnostics)

**Installation**

**Electrical Connection**

**Technical data depending on model**

Input voltage, current and power loss (power dissipated)		Technical data depending on model				
		Zero load	1 x 20 m A load	20 mA loads all spurs	20 mA loads all spurs and 1 spur short circuit	Full capacity load (320 mA total)
<b>12 Spur</b>						
16 V	Trunk current	55 mA	75 mA	316 mA	356 mA	414 mA
	Power loss	-	0.85 W	2.4 W	2.7 W	3.1 W
32 V	Trunk current	43 mA	54 mA	172 mA	188 mA	213 mA
	Power loss	-	1.8W	2.7 W	3 W	3.3 W
<b>10 Spur</b>						
16 V	Trunk current	55 mA	75 mA	270 mA	308 mA	414 mA
	Power loss	-	0.85 W	2 W	2.4 W	3.1 W
32 V	Trunk current	43 mA	54 mA	150 mA	168 mA	213 mA
	Power loss	-	1.8 W	2.4 W	2.7 W	3.3 W

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**pepperl+fuchs**

8 Spur						
16 V	Trunk current	55 mA	75 mA	225 mA	262 mA	414 mA
	Power loss	-	0.85 W	1.7 W	2 W	3.1 W
32 V	Trunk current	43 mA	54 mA	127 mA	146 mA	213 mA
	Power loss	-	1.8 W	2 W	2.3 W	3.3 W

Table 1

**Wire cross section**


Wire cross section		Trunk terminals	Spur terminals
Screw terminal	flexible wire	0.2-2.5 mm <sup>2</sup>	0.2-2.5 mm <sup>2</sup>
	rigid wire	0.2-2.5 mm <sup>2</sup>	0.2-2.5 mm <sup>2</sup>
Spring terminal	flexible wire	0.5-2.5 mm <sup>2</sup>	0.2-2.5 mm <sup>2</sup>
	rigid wire	0.5-2.5 mm <sup>2</sup>	0.2-2.5 mm <sup>2</sup>

Table 2


For further information on the installation see manual

**Accessories**


F\*-LBF-D1.32 Surge Protector for trunk connection




Spur surge protector  
 SCP-LBF-IA1.36.IE0: Surge Protector for spur connection, shield grounded via gas discharge tube  
 or  
 SCP-LBF-IA1.36.IE1: Surge Protector for spur connection, diagnostic included, shield grounded via gas discharge tube  
 Installation on spur connection of device coupler, for example FieldBarrier




ACC-LBF-EB.6 grounding rail  
 Installation on up to six SCP-LBF-IA1.36.IE\* spur surge protector modules to provide a common earth point and mechanical support

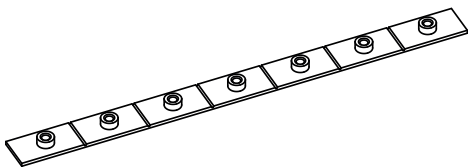

Enclosure Leakage Sensor ELS-1 for water ingress detection



Multi Function Terminal MFT-2L.1600 and MFT-BASE.4P for the trunk connection of the FieldBarrier. The MFT allows live disconnect and maintenance in Zone 1 without requiring a hot work permit.



Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t163102\_eng.pdf