

This is the replacement for IS2813TP


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	E2813NP
Start method:	INSTANT
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

## Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w) ANSI	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F8T5	2	16	0	0.90	20	4.5	0.4A	>0.52	1.50	<145
F13T5	2	26	0	0.85	27	3.1	0.4A	>0.50	1.37	<145
F8/13T5	2	21	0	0.85	23.5	3.6	0.4A	>0.51	1.46	<145

## Wiring Diagram

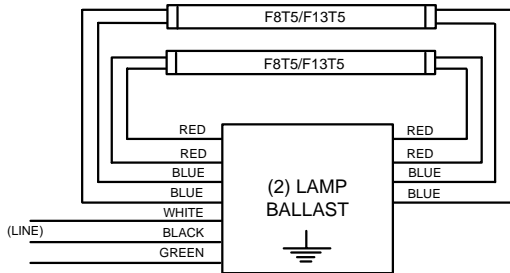


Lead Length (inches)  
Tolerance +/- 1"

Black	17
White	17
Blue X 4	17
Red X 4	17
Yellow	
Green	17
Violet	

Yellow/Blue	
Blue/White	
Brown	
Orange	
Orange/Black	
Black/White	

## Enclosure Drawing

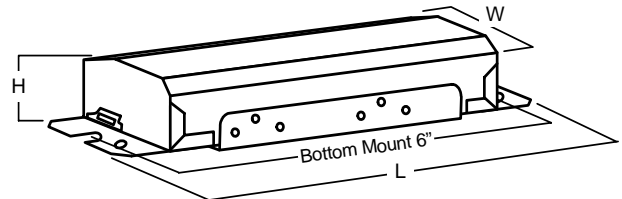

## Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Side Mounting (M):
6-1/2	1-7/8	15/16	2-3/8

Safety	UL	CSA	CE	CUL	Other
		LISTED		619L	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. mswrc\balspec-08/13/03