


AS-i compact module K60 digital A/B slave, 8 DI, IP67 8 x inputs, maximum 200 mA 8 x M12 socket Y-II assignment Mounting plate 3RK1901-0CA00 must be ordered separately

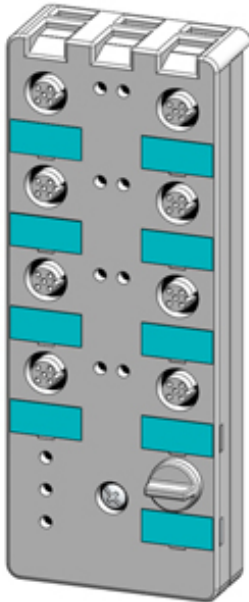

General technical data	
Design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	8 inputs
Design of the slave type	A/B slave
I/O configuration	0
ID/ID2 code	A/E
Number I/O sockets	8
Type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
note	module requires two addresses
Sensor supply	
Type of voltage supply for power supply	using AS-Interface

<b>Input voltage</b>	20 ... 30 V
<b>Property of the sensor supply Short-circuit and overload resistant</b>	Yes
<b>Ampacity of the sensor supply for all inputs</b>	200 mA
<ul style="list-style-type: none"> <li>• at ambient temperature 40 °C</li> </ul>	

### Inputs

<b>Number of digital inputs</b>	8	
<b>Type of connection</b>	2- and 3-wire technology	
<b>Input circuit</b>	PNP transistor	
<b>Type of voltage of the input voltages</b>	DC	
<b>Inputs switching level High min</b>	10 V	
<b>Input current at digital input</b>	6 mA 1.5 mA	
<ul style="list-style-type: none"> <li>• for signal &lt;1&gt; minimum</li> <li>• with signal &lt;0&gt; maximum</li> </ul>		
<b>Inputs</b>	short-circuit and overload resistant	
<ul style="list-style-type: none"> <li>• sensor supply using AS-Interface</li> <li>• socket assignment</li> </ul>		
— PIN 1		sensor supply L+
— PIN 2		data input II
— PIN 3		sensor supply L-
— PIN 4	data input I	
— PIN 5	ground terminal	
<b>Design of the pin assignment of the inputs</b>	Y-II assignment	

### Outputs

<b>Number of digital outputs</b>	0
<b>Outputs external power supply 24 V DC</b>	not required
<b>Outputs</b>	not required
<ul style="list-style-type: none"> <li>• watchdog</li> </ul>	

### Assignment of the data bits

<b>Assignment of data bits</b>	PIN 4 = IN1 (D0) (addr. 1), PIN 2 = IN2 (D1) (addr. 1) PIN 4 = IN2 (D1) (addr. 1) PIN 4 = IN3 (D2) , PIN 2 = IN4 (D3) PIN 4 = IN4 (D3) (addr. 1) PIN 4 = IN1 (D0) (addr. 2), PIN 2 = IN2 (D1) (addr. 2) PIN4 = IN2 (D1) (addr. 2) PIN4 = IN3 (D2) (addr. 2), PIN2 = IN4 (D3) (addr. 2) PIN4 = IN4 (D3) (addr. 2)
<ul style="list-style-type: none"> <li>• socket</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 2</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 3</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 4</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 5</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 6</li> </ul>	
<ul style="list-style-type: none"> <li>• socket 7</li> <li>• socket 8</li> </ul>	

### Ambient conditions

<b>Ambient temperature</b>	-25 ... +85 °C
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	

• during storage	-40 ... +85 °C
Protection class IP	IP67

### Display

<b>Status display</b>	
• display of I/Os	yellow LED
• display of Uaux	not required
• display of AS-Interface/diagnostics	green/red LED

### Mechanical data

Width	60 mm
Height	152 mm
Depth	29 mm
Mounting type	standard rail mounting/wall mounting using mounting plate for K60 compact module

### Certificates/approvals

AS-Interface certificate	yes (or requested for in case of new units)
Approvals	UL, CSA, shipbuilding (or requested for in case of new units)

<b>General Product Approval</b>	<b>Declaration of Conformity</b>	<b>Shipping Approval</b>
---------------------------------	----------------------------------	--------------------------



<b>Shipping Approval</b>	<b>other</b>
--------------------------	--------------



[Confirmation](#)

[Miscellaneous](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-0DQ00-0AA3>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0DQ00-0AA3>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0DQ00-0AA3>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK2200-0DQ00-0AA3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0DQ00-0AA3&lang=en)

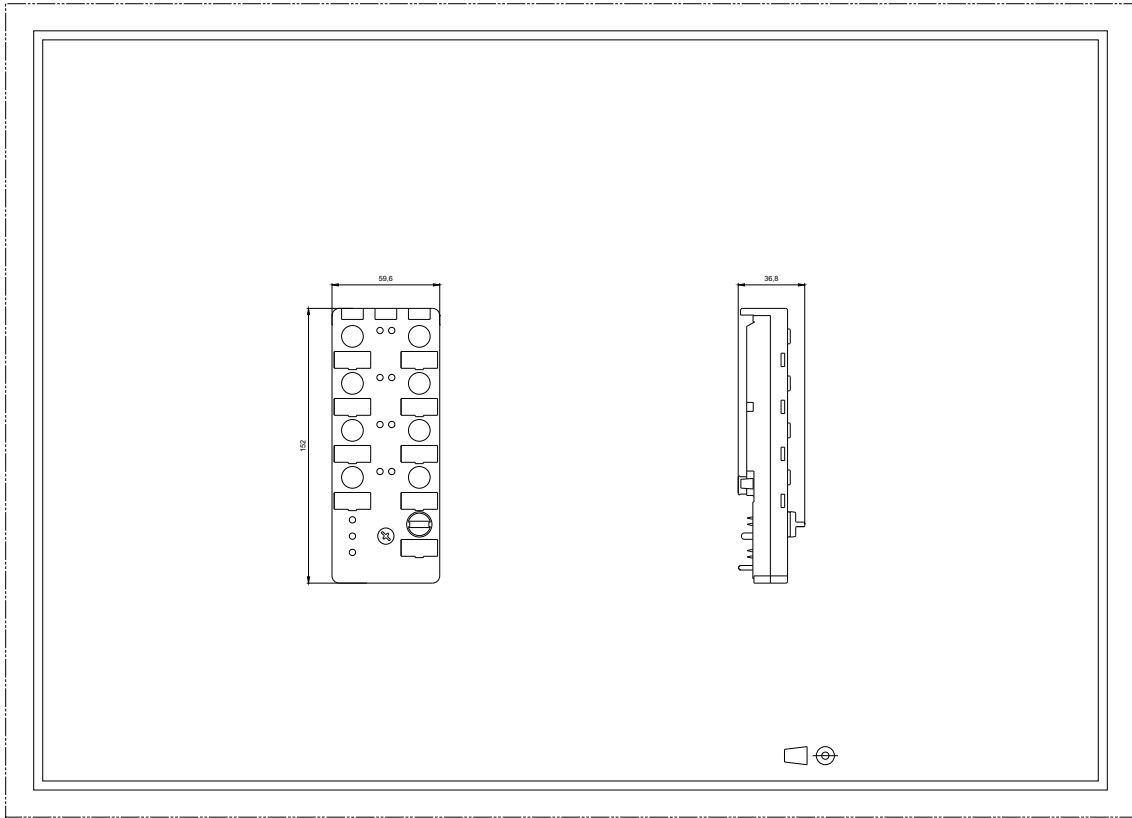

last modified:

02/07/2019