



stand-alone assembly support for
 3RU21/3RB30/3RB31/3RR2 Size S00 Stand-alone
 installation Main circuit: Screw Auxiliary circuit: --

General technical data

product brand name		SIRIUS
product designation		individual mount
size of overload relay		S00
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70

Installation/ mounting/ dimensions

fastening method		screw and snap-on mounting onto 35 mm standard mounting rail
width	mm	45
height	mm	89
depth	mm	75

Connections/ Terminals

type of electrical connection		screw-type terminals
• for main current circuit		
type of connectable conductor cross-sections		
• for main contacts finely stranded		0.5 ... 2.5 mm ²
— with core end processing		
• at AWG cables for main contacts		1x (20 ... 12)

Certificates/ approvals

General Product Approval	Declaration of Conformity
--------------------------	---------------------------



[Confirmation](#)



EG-Konf.

Test Certificates Marine / Shipping

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2916-3AA01>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2916-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2916-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2916-3AA01&lang=en

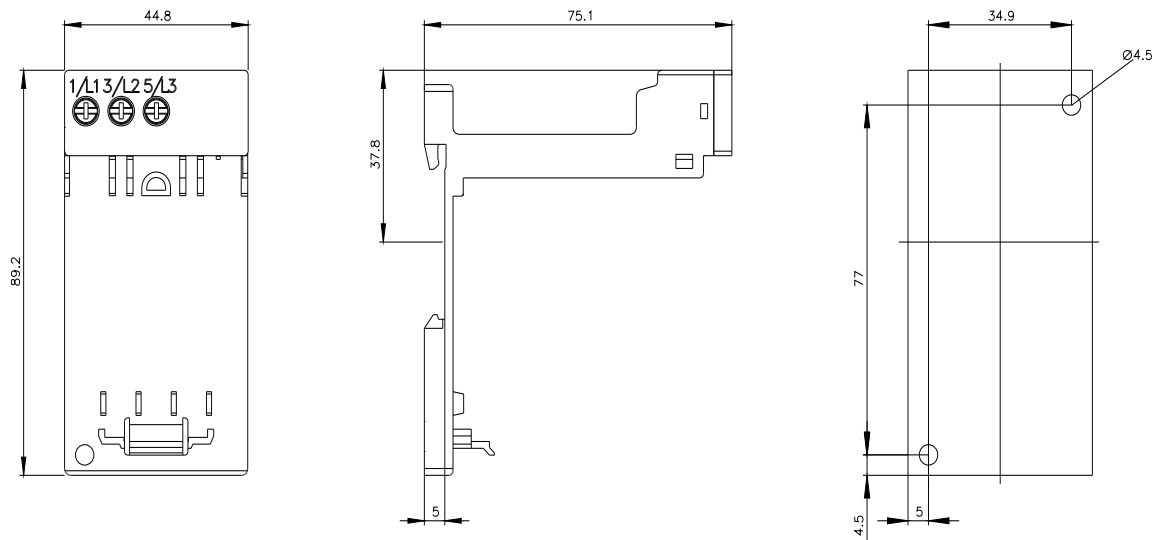

1/L1

3/L2

5/L3

--	--	--	--

last modified:

12/15/2020 