

SIRIUS safety relay Basic unit Standard series Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact Us = 24 V AC/DC Spring-type terminal (push-in)



General technical data	
Product brand name	SIRIUS
Product category	Safety relays
Product designation	safety relays
Design of the product	Relay enabling circuits
Protection class IP of the enclosure	IP20
Protection against electrical shock	finger-safe
Insulation voltage rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 kPa ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
Shock resistance	10g / 11 ms
Surge voltage resistance rated value	4 000 V
EMC emitted interference	IEC 60947-5-1, IEC 61000

<b>Installation environment regarding EMC</b>	This product is suitable for Class B environments and can also be used in domestic environments.
<b>Overvoltage category</b>	3
<b>Degree of pollution</b>	3
<b>Number of sensor inputs 1-channel or 2-channel</b>	1
<b>Design of the cascading</b>	none
<b>Type of the safety-related wiring of the inputs</b>	single-channel and two-channel
<b>Product feature cross-circuit-proof</b>	Yes
<b>Safety Integrity Level (SIL)</b>	
• acc. to IEC 61508	3
<b>Performance level (PL)</b>	
• acc. to EN ISO 13849-1	e
<b>Category acc. to EN ISO 13849-1</b>	4
<b>Safe failure fraction (SFF)</b>	99 %
<b>PFHD with high demand rate acc. to EN 62061</b>	0.0000000017 1/h
<b>PFDavg with low demand rate acc. to IEC 61508</b>	0.000001
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Hardware fault tolerance acc. to IEC 61508</b>	1
<b>Safety device type acc. to IEC 61508-2</b>	Type A
<b>Number of outputs as contact-affected switching element</b>	
• as NC contact	
— for signaling function instantaneous contact	1
— for signaling function delayed switching	0
— safety-related instantaneous contact	0
— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	3
— safety-related delayed switching	0
<b>Number of outputs as contact-less semiconductor switching element</b>	
• safety-related	
— delayed switching	0
— instantaneous contact	0
• for signaling function instantaneous contact	0
<b>Stop category acc. to DIN EN 60204-1</b>	0

## General technical data

### Design of input

<ul style="list-style-type: none"> <li>• cascading input/functional switching</li> </ul>	No
<ul style="list-style-type: none"> <li>• feedback input</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Start input</li> </ul>	Yes
<b>Type of electrical connection Plug-in socket</b>	No
<b>Operating frequency maximum</b>	360 1/h
<b>Switching capacity current</b>	
<ul style="list-style-type: none"> <li>• of the NO contacts of the relay outputs <ul style="list-style-type: none"> <li>— at DC-13 <ul style="list-style-type: none"> <li>— at 24 V</li> <li>— at 115 V</li> <li>— at 230 V</li> </ul> </li> <li>— at AC-15 <ul style="list-style-type: none"> <li>— at 115 V</li> <li>— at 230 V</li> </ul> </li> </ul> </li> </ul>	5 A 0.2 A 0.1 A  5 A 5 A
<ul style="list-style-type: none"> <li>• of the NC contacts of the relay outputs <ul style="list-style-type: none"> <li>— at DC-13 <ul style="list-style-type: none"> <li>— at 24 V</li> <li>— at 115 V</li> <li>— at 230 V</li> </ul> </li> <li>— at AC-15 <ul style="list-style-type: none"> <li>— at 115 V</li> <li>— at 230 V</li> </ul> </li> </ul> </li> </ul>	1 A 0.2 A 0.1 A  1.5 A 1.5 A
<b>Thermal current of the switching element with contacts maximum</b>	5 A
<b>Operating current at 17 V minimum</b>	5 mA
<b>Mechanical service life (switching cycles) typical</b>	10 000 000
<b>Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required</b>	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
<b>Design of the fuse link for short circuit protection of the NC contacts of the relay outputs required</b>	Diazed or Neozed fuses, operating class gL/gG: 6 A or MCB type A: 2 A or MCB type B: 2 A or MCB type C: 1 A
<b>Wire length</b>	
<ul style="list-style-type: none"> <li>• for total of all sensor circuits with Cu 1.5 mm<sup>2</sup> and 150 nF/km maximum</li> </ul>	2 000 m
<b>Make time with automatic start</b>	
<ul style="list-style-type: none"> <li>• typical</li> <li>• at DC maximum</li> <li>• at AC maximum</li> </ul>	200 ms 320 ms 320 ms
<b>Make time with automatic start after power failure</b>	
<ul style="list-style-type: none"> <li>• typical</li> <li>• maximum</li> </ul>	200 ms 320 ms
<b>Make time with monitored start</b>	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	20 ms

• typical	15 ms
<b>Backslide delay time after opening of the safety circuits typical</b>	10 ms
<b>Backslide delay time in the event of power failure</b>	
• typical	65 ms
• maximum	75 ms
<b>Recovery time after opening of the safety circuits typical</b>	10 ms
<b>Recovery time after power failure typical</b>	0.09 s
<b>Pulse duration</b>	
• of the sensor input minimum	150 ms
• of the ON pushbutton input minimum	0.015 s

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage frequency</b>	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
<b>Control supply voltage</b>	
• at DC	
— rated value	24 V
• at AC	
— at 50 Hz	
— rated value	24 V
— at 60 Hz	
— rated value	24 V
<b>Operating range factor control supply voltage rated value of magnet coil</b>	
• at AC	
— at 50 Hz	0.85 ... 1.1
— at 60 Hz	0.85 ... 1.1
• at DC	0.85 ... 1.2
<b>Power loss [W] typical</b>	2 W

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Required spacing for grounded parts at the side</b>	5 mm
<b>Required spacing with side-by-side mounting at the side</b>	0 mm
<b>Mounting type</b>	screw and snap-on mounting
<b>Width</b>	22.5 mm
<b>Height</b>	100 mm
<b>Depth</b>	121.6 mm

### Connections/Terminals

<b>Type of electrical connection</b>	Push-in terminal
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>— with core end processing</li> <li>— without core end processing</li> </ul> </li> </ul>	1x (0.5 ... 1.0 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> ) 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>Type of connectable conductor cross-sections at AWG conductors</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (20 ... 16), 2x (20 ... 16)
<ul style="list-style-type: none"> <li>• stranded</li> </ul>	1x (20 ... 16), 2x (20 ... 16)

Product Function	
<b>Product function parameterizable</b>	Sensor floating / sensor non-floating, monitored start / autostart
<b>Suitability for operation Device connector 3ZY12</b>	No
<b>Suitability for interaction press control</b>	No
<b>Suitability for use</b>	
<ul style="list-style-type: none"> <li>• safety switch</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Monitoring of floating sensors</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Monitoring of non-floating sensors</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• safety-related circuits</li> </ul>	Yes

<b>Certificates/approvals</b>
-------------------------------

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



[Type Examination Certificate](#)

Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



LRS



RINA



RMRS

other	Railway
<a href="#">Confirmation</a>	<a href="#">Confirmation</a>

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1111-2AB30>

##### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1111-2AB30>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1111-2AB30>


##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SK1111-2AB30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1111-2AB30&lang=en)

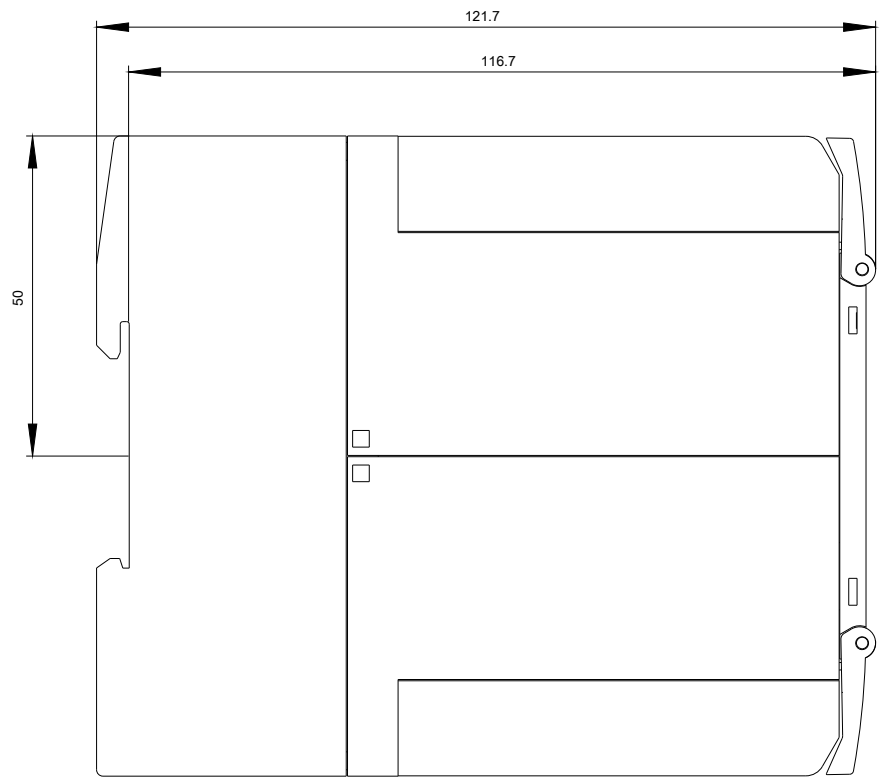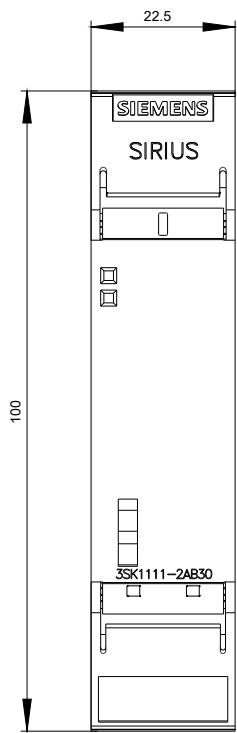

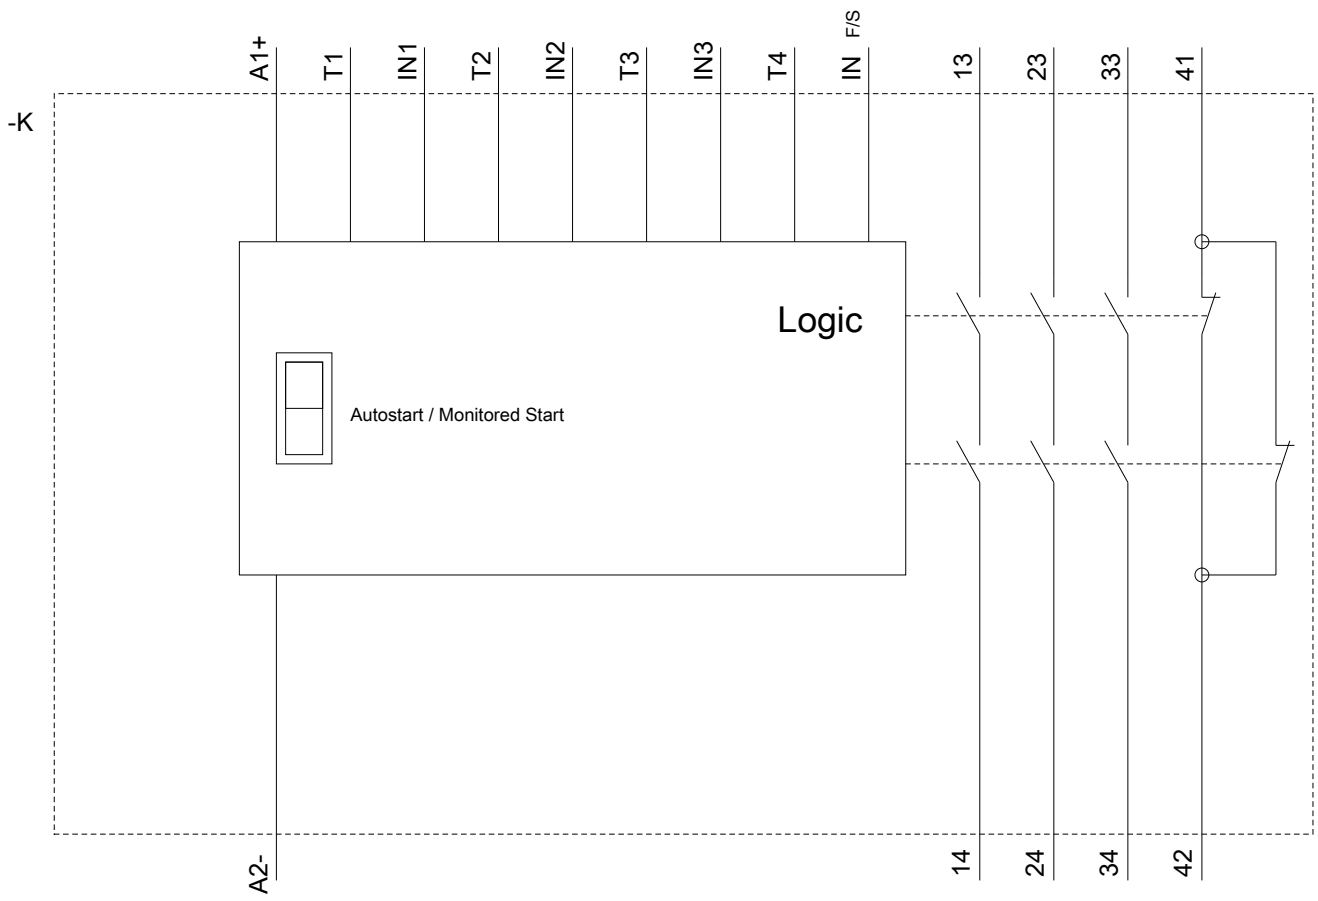



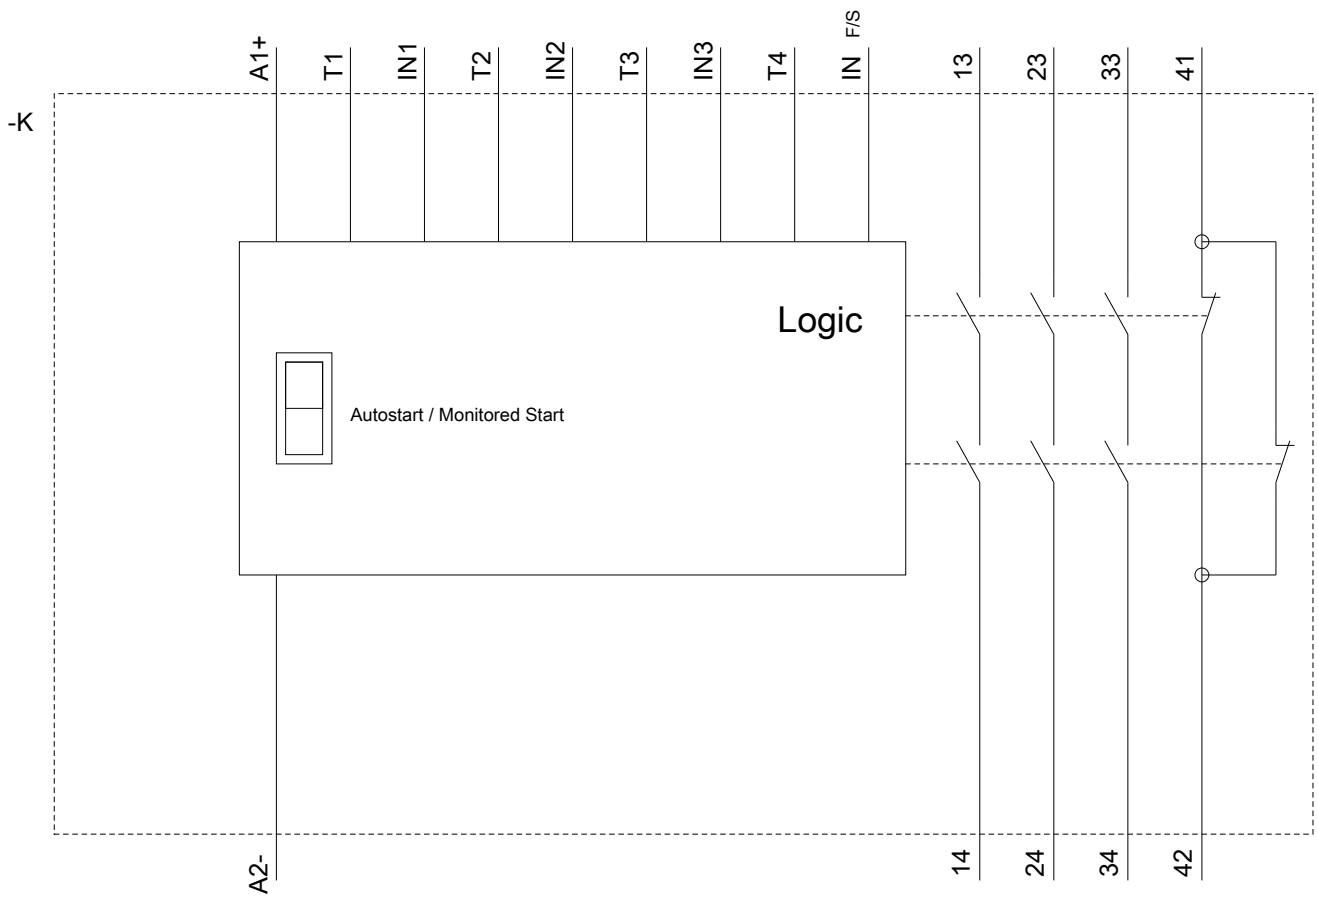

last modified:

04/01/2019