


SIMATIC DP, ET200 PRO Fail-safe electronic module 8/16 F-DI 24 V
DC PROFIsafe, 90 mm overall width, up to Category 4 (EN 954-1)/
SIL3 (IEC61508)/PLE (ISO13849)

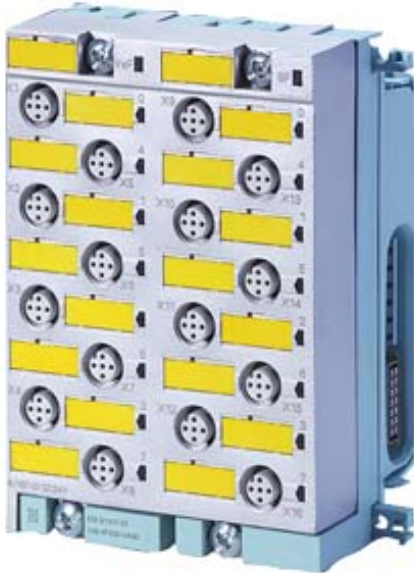

Supply voltage

Rated value (DC)	24 V
Reverse polarity protection	Yes

Power loss

Power loss, typ.	4.5 W
------------------	-------

Digital inputs

Number of digital inputs	16
Input current	
• for signal "1", typ.	3.7 mA

Standards, approvals, certificates

Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	e
• SIL acc. to IEC 61508	3

Dimensions

Width	90 mm
Height	130 mm
Depth	65 mm

last modified:

05/25/2019