


Spare part SIMATIC S7-300, CPU 314C-2 DP Compact CPU with MPI, 24 DI/16 DO, 4 AI, 2 AO, 1 Pt100, 4 high-speed counters (60 kHz), integrated DP interface, Integr. power supply 24 V DC, Work memory 96 KB, Front connector (2x 40-pole) and Micro Memory Card required

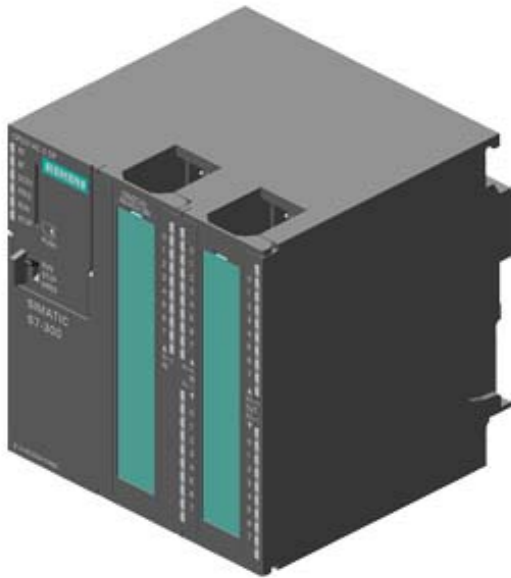

General information	
HW functional status	01
Firmware version	V2.6
Engineering with	
<ul style="list-style-type: none"> Programming package 	STEP 7 V5.3 SP2 or higher with HW update
Supply voltage	
Rated value (DC)	Yes
<ul style="list-style-type: none"> 24 V DC 	
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
external protection for power supply lines (recommendation)	Miniature circuit breaker, type C; min. 2 A; miniature circuit breaker type B, min. 4 A
Load voltage L+	
<ul style="list-style-type: none"> Rated value (DC) permissible range, lower limit (DC) permissible range, upper limit (DC) 	24 V 20.4 V 28.8 V
Digital inputs	
— Rated value (DC)	24 V

— Reverse polarity protection	Yes
Digital outputs	
— Rated value (DC)	24 V
— Reverse polarity protection	No
Analog outputs	
— Rated value (DC)	24 V
— Reverse polarity protection	Yes
Input current	
Current consumption (rated value)	1 000 mA
Current consumption (in no-load operation), typ.	150 mA
Inrush current, typ.	11 A
I^2t	0.7 A ² ·s
Digital inputs	
• from load voltage L+ (without load), max.	70 mA
Digital outputs	
• from load voltage L+, max.	100 mA
Power loss	
Power loss, typ.	14 W
Memory	
Work memory	
• integrated	96 kbyte
• expandable	No
Load memory	
• Plug-in (MMC)	Yes
• Plug-in (MMC), max.	8 Mbyte
• Data management on MMC (after last programming), min.	10 y
Backup	
• present	Yes; Guaranteed by MMC (maintenance-free)
• without battery	Yes; Program and data
CPU processing times	
for bit operations, typ.	0.1 μs
for word operations, typ.	0.2 μs
for fixed point arithmetic, typ.	2 μs
for floating point arithmetic, typ.	3 μs
CPU-blocks	
Number of blocks (total)	1 024; (DBs, FCs, FBs); the maximum number of loadable blocks can be reduced by the MMC used.
DB	
• Number, max.	511; Number range: 1 to 511

• Size, max.	16 kbyte
FB	
• Number, max.	1 024; Number range: 0 to 2047
• Size, max.	16 kbyte
FC	
• Number, max.	1 024; Number range: 0 to 2047
• Size, max.	16 kbyte
OB	
• Size, max.	16 kbyte
• Number of free cycle OBs	1; OB 1
• Number of time alarm OBs	1; OB 10
• Number of delay alarm OBs	1; OB 20
• Number of cyclic interrupt OBs	1; OB 35
• Number of process alarm OBs	1; OB 40
• Number of DPV1 alarm OBs	3; OB 55, 56, 57
• Number of startup OBs	1; OB 100
• Number of asynchronous error OBs	5; OB 80, 82, 85, 86, 87
• Number of synchronous error OBs	2; OB 121, 122
Nesting depth	
• per priority class	8
• additional within an error OB	4
Counters, timers and their retentivity	
S7 counter	
• Number	256
Retentivity	
— adjustable	Yes
— lower limit	0
— upper limit	255
— preset	8
Counting range	
— lower limit	0
— upper limit	999
IEC counter	
• present	Yes
• Type	SFB
• Number	Unlimited (limited only by RAM capacity)
S7 times	
• Number	256
Retentivity	
— adjustable	Yes
— lower limit	0

— upper limit	255
— preset	No retentivity
Time range	
— lower limit	10 ms
— upper limit	9 990 s
IEC timer	
• present	Yes
• Type	SFB
• Number	Unlimited (limited only by RAM capacity)
Data areas and their retentivity	
retentive data area in total	All, max. 64 KB
Flag	
• Number, max.	256 byte
• Retentivity available	Yes; MB 0 to MB 255
• Retentivity preset	MB 0 to MB 15
• Number of clock memories	8; 1 memory byte
Data blocks	
• Retentivity adjustable	Yes; via non-retain property on DB
• Retentivity preset	Yes
Local data	
• per priority class, max.	510 byte
Address area	
I/O address area	
• Inputs	1 kbyte
• Outputs	1 kbyte
of which distributed	
— Inputs	979 byte
— Outputs	986 byte
Process image	
• Inputs	128 byte
• Outputs	128 byte
Default addresses of the integrated channels	
— Digital inputs	124.0 to 126.7
— Digital outputs	124.0 to 125.7
— Analog inputs	752 to 761
— Analog outputs	752 to 755
Digital channels	
• Inputs	7 856
— of which central	1 016
• Outputs	7 904
— of which central	1 008

Analog channels	
• Inputs	494
— of which central	253
• Outputs	495
— of which central	250
Hardware configuration	
Number of expansion units, max.	3
Number of DP masters	
• integrated	1
• via CP	4
Number of operable FMs and CPs (recommended)	
• FM	8
• CP, PtP	8
• CP, LAN	10
Rack	
• Racks, max.	4
• Modules per rack, max.	8; In rack 3 max. 7
Time of day	
Clock	
• Hardware clock (real-time)	Yes
• retentive and synchronizable	Yes
• Backup time	6 wk; At 40 °C ambient temperature
• Deviation per day, max.	10 s
Operating hours counter	
• Number	1
• Number/Number range	0
• Range of values	0 to 2 ³¹ hours (when using SFC 101)
• Granularity	1 h
• retentive	Yes; Must be restarted at each restart
Clock synchronization	
• supported	Yes
• to MPI, master	Yes
• to MPI, slave	Yes
• to DP, master	Yes; With DP slave only slave clock
• to DP, slave	Yes
• in AS, master	Yes
Digital inputs	
Number of digital inputs	24
• of which inputs usable for technological functions	16
integrated channels (DI)	24

Input characteristic curve in accordance with IEC 61131, type 1	Yes
Number of simultaneously controllable inputs	
horizontal installation	
— up to 40 °C, max.	24
— up to 60 °C, max.	12
vertical installation	
— up to 40 °C, max.	12
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-3 to +5V
• for signal "1"	+15 to +30V
Input current	
• for signal "1", typ.	9 mA
Input delay (for rated value of input voltage)	
for standard inputs	
— parameterizable	Yes; 0.1 / 0.3 / 3 / 15 ms
— Rated value	3 ms
for technological functions	
— at "0" to "1", max.	8 µs
Cable length	
• shielded, max.	1 000 m; 50 m for technological functions
• unshielded, max.	600 m; For technological functions: No
for technological functions	
— shielded, max.	50 m
— unshielded, max.	not allowed
Digital outputs	
Number of digital outputs	16
• of which high-speed outputs	4
integrated channels (DO)	16
Short-circuit protection	Yes; Clocked electronically
• Response threshold, typ.	1 A
Limitation of inductive shutdown voltage to	L+ (-48 V)
Controlling a digital input	Yes
Switching capacity of the outputs	
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	4 kΩ
Output voltage	
• for signal "1", min.	L+ (-0.8 V)
Output current	

• for signal "1" rated value	500 mA
• for signal "1" permissible range, min.	5 mA
• for signal "1" permissible range, max.	0.6 A
• for signal "1" minimum load current	5 mA
• for signal "0" residual current, max.	0.5 mA
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	100 Hz
• of the pulse outputs, with resistive load, max.	2.5 kHz
Total current of the outputs (per group)	
horizontal installation	
— up to 40 °C, max.	3 A
— up to 60 °C, max.	2 A
vertical installation	
— up to 40 °C, max.	2 A
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m
Analog inputs	
Number of analog inputs	
• For voltage/current measurement	4
• For resistance/resistance thermometer measurement	1
integrated channels (AI)	4+1
permissible input voltage for current input (destruction limit), max.	5 V; Permanent
permissible input voltage for voltage input (destruction limit), max.	30 V; Permanent
permissible input current for voltage input (destruction limit), max.	0.5 mA; Permanent
permissible input current for current input (destruction limit), max.	50 mA; Permanent
No-load voltage for resistance-type transmitter, typ.	2.5 V
Constant measurement current for resistance-type transmitter, typ.	1.8 to 3.3 mA
Technical unit for temperature measurement adjustable	Yes; Degrees Celsius / degrees Fahrenheit / Kelvin
Input ranges	
• Current	Yes

• Resistance thermometer	Yes; Pt 100 / 10 MΩ
• Resistance	Yes
Input ranges (rated values), voltages	
• 0 to +10 V	Yes
• Input resistance (0 to 10 V)	100 kΩ
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• Input resistance (0 to 20 mA)	100 Ω
• -20 mA to +20 mA	Yes
• Input resistance (-20 mA to +20 mA)	100 Ω
• 4 mA to 20 mA	Yes
• Input resistance (4 mA to 20 mA)	100 Ω
Input ranges (rated values), resistance thermometer	
• Pt 100	Yes
• Input resistance (Pt 100)	10 MΩ
Input ranges (rated values), resistors	
• 0 to 600 ohms	Yes
• Input resistance (0 to 600 ohms)	10 MΩ
Thermocouple (TC)	
Temperature compensation	
— parameterizable	No
Characteristic linearization	
• parameterizable	Yes; by software
— for resistance thermometer	Pt 100
Cable length	
• shielded, max.	100 m
Analog outputs	
Number of analog outputs	2
integrated channels (AO)	2
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	55 mA
Current output, no-load voltage, max.	17 V
Output ranges, voltage	
• 0 to 10 V	Yes
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for voltage output two-wire connection	Yes; Without compensation of the line resistances

• for voltage output four-wire connection	No
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 k Ω
• with voltage outputs, capacitive load, max.	0.1 μ F
• with current outputs, max.	300 Ω
• with current outputs, inductive load, max.	0.1 mH
Destruction limits against externally applied voltages and currents	
• Voltages at the outputs towards MANA	16 V; Permanent
• Current, max.	50 mA; Permanent
Cable length	
• shielded, max.	200 m
Analog value generation for the inputs	
Measurement principle	Actual value encryption (successive approximation)
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit
• Integration time, parameterizable	Yes; 2,5 / 16,6 / 20 ms
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 Hz
• permissible input frequency, max.	400 Hz
• Time constant of the input filter	0.38 ms
• Basic execution time of the module (all channels released)	1 ms
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit
• Conversion time (per channel)	1 ms
Settling time	
• for resistive load	0.6 ms
• for capacitive load	1 ms
• for inductive load	0.5 ms
Encoder	
Connection of signal encoders	
• for voltage measurement	Yes
• for current measurement as 2-wire transducer	Yes; with external supply
• for current measurement as 4-wire transducer	Yes
• for resistance measurement with two-wire connection	Yes; Without compensation of the line resistances

• for resistance measurement with three-wire connection	No
• for resistance measurement with four-wire connection	No
Connectable encoders	
• 2-wire sensor	Yes
— permissible quiescent current (2-wire sensor), max.	1.5 mA

Errors/accuracies

Temperature error (relative to input range), (+/-)	0.006 %/K
Crosstalk between the inputs, min.	60 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (+/-)	0.06 %
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	0.1 %
Linearity error (relative to output range), (+/-)	0.15 %
Temperature error (relative to output range), (+/-)	0.01 %/K
Crosstalk between the outputs, min.	60 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.06 %

Operational error limit in overall temperature range

• Voltage, relative to input range, (+/-)	1 %
• Current, relative to input range, (+/-)	1 %
• Resistance, relative to input range, (+/-)	5 %
• Voltage, relative to output range, (+/-)	1 %
• Current, relative to output range, (+/-)	1 %

Basic error limit (operational limit at 25 °C)

• Voltage, relative to input range, (+/-)	0.7 %; Linearity error ±0.06 %
• Current, relative to input range, (+/-)	0.7 %; Linearity error ±0.06 %
• Resistance, relative to input range, (+/-)	3 %; Linearity error ±0.2 %
• Resistance thermometer, relative to input range, (+/-)	3 %
• Voltage, relative to output range, (+/-)	0.7 %
• Current, relative to output range, (+/-)	0.7 %

Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, f_1 = interference frequency

• Series mode interference (peak value of interference < rated value of input range), min.	30 dB
• Common mode interference, min.	40 dB

Interfaces

Number of industrial Ethernet interfaces	0
Number of RS 485 interfaces	2; MPI and PROFIBUS DP
Number of RS 422 interfaces	0

MPI

- Cable length, max. 50 m; without repeater

1. Interface

Interface type	Integrated RS 485 interface
Physics	RS 485
Isolated	No
Power supply to interface (15 to 30 V DC), max.	200 mA
Protocols	
• MPI	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• Point-to-point connection	No
MPI	
• Number of connections	12
• Transmission rate, max.	187.5 kbit/s
Services	
— PG/OP communication	Yes
— Routing	Yes
— Global data communication	Yes
— S7 basic communication	Yes
— S7 communication	Yes
— S7 communication, as client	No
— S7 communication, as server	Yes

2. Interface

Interface type	Integrated RS 485 interface
Physics	RS 485
Isolated	Yes
Power supply to interface (15 to 30 V DC), max.	200 mA
Number of connection resources	12
Protocols	
• MPI	No
• PROFINET IO Controller	No
• PROFINET CBA	No
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• Point-to-point connection	No
PROFIBUS DP master	
• Number of connections, max.	12; For PG/OP communication
• Transmission rate, max.	12 Mbit/s
• Number of DP slaves, max.	32
Services	
— PG/OP communication	Yes

— Routing	Yes
— Global data communication	No
— S7 basic communication	Yes; I blocks only
— S7 communication	Yes
— S7 communication, as client	No
— S7 communication, as server	Yes
— Equidistance	Yes
— Isochronous mode	No
— SYNC/FREEZE	Yes
— Activation/deactivation of DP slaves	Yes
— Direct data exchange (slave-to-slave communication)	Yes
— DPV1	Yes
Address area	
— Inputs, max.	1 kbyte
— Outputs, max.	1 kbyte
User data per DP slave	
— Inputs, max.	244 byte
— Outputs, max.	244 byte
PROFIBUS DP slave	
• Number of connections	12
• GSD file	The latest GSD file is available at: http://www.siemens.com/profibus-gsd
• Transmission rate, max.	12 Mbit/s
• automatic baud rate search	Yes; only with passive interface
• Address area, max.	32
• User data per address area, max.	32 byte
Services	
— PG/OP communication	Yes
— Routing	Yes; Only with active interface
— Global data communication	No
— S7 basic communication	No
— S7 communication	Yes
— S7 communication, as client	No
— S7 communication, as server	Yes
— Direct data exchange (slave-to-slave communication)	Yes
— DPV1	No
Transfer memory	
— Inputs	244 byte
— Outputs	244 byte

Communication functions

PG/OP communication	Yes
Global data communication	
<ul style="list-style-type: none"> supported 	Yes
<ul style="list-style-type: none"> Number of GD loops, max. 	4
<ul style="list-style-type: none"> Number of GD packets, max. 	4
<ul style="list-style-type: none"> Number of GD packets, transmitter, max. 	4
<ul style="list-style-type: none"> Number of GD packets, receiver, max. 	4
<ul style="list-style-type: none"> Size of GD packets, max. 	22 byte
<ul style="list-style-type: none"> Size of GD packet (of which consistent), max. 	22 byte
S7 basic communication	
<ul style="list-style-type: none"> supported 	Yes
<ul style="list-style-type: none"> User data per job, max. 	76 byte
<ul style="list-style-type: none"> User data per job (of which consistent), max. 	76 byte; 76 bytes (with X_SEND or X_RCV); 64 bytes (with X_PUT or X_GET as server)
S7 communication	
<ul style="list-style-type: none"> supported 	Yes
<ul style="list-style-type: none"> as server 	Yes
<ul style="list-style-type: none"> as client 	Yes; Via CP and loadable FB
<ul style="list-style-type: none"> User data per job, max. 	180 kbyte; With PUT/GET
<ul style="list-style-type: none"> User data per job (of which consistent), max. 	64 byte
S5 compatible communication	
<ul style="list-style-type: none"> supported 	Yes; via CP and loadable FC
Number of connections	
<ul style="list-style-type: none"> overall 	12
<ul style="list-style-type: none"> usable for PG communication 	11
<ul style="list-style-type: none"> <ul style="list-style-type: none"> reserved for PG communication 	1
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for PG communication, min. 	1
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for PG communication, max. 	11
<ul style="list-style-type: none"> usable for OP communication 	11
<ul style="list-style-type: none"> <ul style="list-style-type: none"> reserved for OP communication 	1
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for OP communication, min. 	1
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for OP communication, max. 	11
<ul style="list-style-type: none"> usable for S7 basic communication 	8
<ul style="list-style-type: none"> <ul style="list-style-type: none"> reserved for S7 basic communication 	0
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for S7 basic communication, min. 	0
<ul style="list-style-type: none"> <ul style="list-style-type: none"> adjustable for S7 basic communication, max. 	8
<ul style="list-style-type: none"> usable for routing 	4; max.
S7 message functions	

Number of login stations for message functions, max.	12; Depending on the configured connections for PG/OP and S7 basic communication
Process diagnostic messages	Yes
simultaneously active Alarm-S blocks, max.	40

Test commissioning functions

Status block	Yes
Single step	Yes
Number of breakpoints	2

Status/control

• Status/control variable	Yes
• Variables	Inputs, outputs, memory bits, DB, times, counters
• Number of variables, max.	30
— of which status variables, max.	30
— of which control variables, max.	14

Forcing

• Forcing	Yes
• Forcing, variables	Inputs, outputs
• Number of variables, max.	10

Diagnostic buffer

• present	Yes
• Number of entries, max.	100

Interrupts/diagnostics/status information

Diagnostics indication LED	
• Status indicator digital input (green)	Yes
• Status indicator digital output (green)	Yes

Integrated Functions

Number of counters	4; See "Technological Functions" manual
Counting frequency (counter) max.	60 kHz
Frequency measurement	Yes
Number of frequency meters	4; up to 60 kHz (see "Technological Functions" manual)
controlled positioning	Yes
integrated function blocks (closed-loop control)	PID controller (see "Technological Functions" manual)
PID controller	Yes
Number of pulse outputs	4; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)
Limit frequency (pulse)	2.5 kHz

Potential separation

Potential separation digital inputs	
• Potential separation digital inputs	Yes
• between the channels	No
• between the channels and backplane bus	Yes

Potential separation digital outputs	
• Potential separation digital outputs	Yes
• between the channels	Yes
• between the channels, in groups of	8
• between the channels and backplane bus	Yes
Potential separation analog inputs	
• Potential separation analog inputs	Yes; common for analog I/O
• between the channels	No
• between the channels and backplane bus	Yes
Potential separation analog outputs	
• Potential separation analog outputs	Yes; common for analog I/O
• between the channels	No
• between the channels and backplane bus	Yes
Permissible potential difference	
between different circuits	75 V DC/60 V AC
Between the inputs and MANA (UCM)	8 V DC
between MANA and M internally (UISO)	75 V DC/60 V AC
Isolation	
Isolation tested with	600 V DC
Configuration	
Configuration software	
• STEP 7	Yes; V5.3 SP2 with HW update
Programming	
• Command set	see instruction list
• Nesting levels	8
• System functions (SFC)	see instruction list
• System function blocks (SFB)	see instruction list
Programming language	
— LAD	Yes
— FBD	Yes
— STL	Yes
— SCL	Yes
— CFC	Yes
— GRAPH	Yes
— HiGraph®	Yes
Know-how protection	
• User program protection/password protection	Yes
Dimensions	
Width	120 mm
Height	125 mm

Depth	130 mm
Weights	
Weight, approx.	676 g
last modified:	03/18/2019