


Last information update: June 2023

**Product configuration: BU39**

BU39: Outdoor wall-mounted luminaire - Warm white LED - with electronic ballast Vin=100-240V ac - Flood optic

**Product code**

BU39: Outdoor wall-mounted luminaire - Warm white LED - with electronic ballast Vin=100-240V ac - Flood optic

**Technical description**

Direct light outdoor floodlight, designed to use warm white LED lamps, with flood optic. For wall-mounting with the special base. The luminaire consists of an optical assembly, upper cap and base for fixing to the wall. The optical assembly, upper cap and base are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. Transparent tempered sodium - calcium safety glass with customised grey serigraphy, 4 mm thick, joined to the optical assembly with silicone. Adjustable fixing bracket made of painted aluminium; with a double nickel-plated brass PG11 cable gland, suitable for power cables  $\varnothing$  6.5-11 mm. For electrical connection the product has a plastic box with three 2-pin quick-coupling terminals for cables with max. cross-section 4 mm<sup>2</sup>. Electronic circuit with warm white LED, optics with lens made of thermoplastic material (methacrylate) and a black polycarbonate multi-groove ring for visual comfort. Equipped with electronic ballast Vin=100-240V ac 50/60Hz. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

**Installation**

For wall-mounting with the special aluminium base. Secure using screw anchors for concrete, cement and solid brick. Product can be installed with the light beam in any direction (up, down, right, left, slanting, etc.).

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

0.88

**Mounting**

wall arm/wall surface

**Wiring**

Equipped with electronic ballast Vin=100-240V ac 50/60Hz. Polyamide PG11 double cable gland for pass-through wiring, suitable for power cables  $\varnothing$  6.5-11 mm.

**Notes**

Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	437	Colour temperature [K]:	3000
W system:	7.7	MacAdam Step:	3
Im source:	810	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W source:	6.2	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	56.8	Ballast losses [W]:	1.5
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	54	ZVEI Code:	LED
Beam angle [°]:	78°	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -20°C to +35°C.

**Polar**

Imax=262 cd	Lux			
	h	d	Em	Emax
	1	1.6	178	262
	2	3.2	44	66
	3	4.9	20	29
	4	6.5	11	16

### Isolux

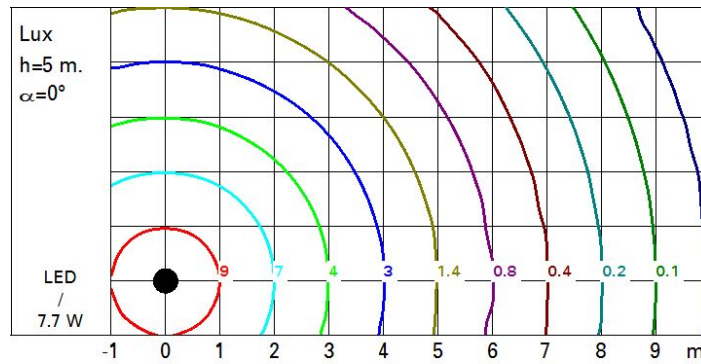

### UGR diagram

Corrected UGR values (at 810 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	22.4	23.4	22.7	23.6	23.9	22.4	23.4	22.7	23.6	23.9
	3H	22.9	23.8	23.2	24.1	24.3	22.6	23.5	22.9	23.7	24.0
	4H	23.1	23.9	23.5	24.2	24.5	22.6	23.4	23.0	23.7	24.0
	6H	23.3	24.0	23.6	24.4	24.7	22.6	23.3	23.0	23.7	24.0
	8H	23.3	24.1	23.7	24.4	24.8	22.6	23.3	22.9	23.6	24.0
	12H	23.4	24.1	23.8	24.4	24.8	22.5	23.2	22.9	23.6	23.9
4H	2H	22.6	23.4	23.0	23.7	24.0	23.1	23.9	23.5	24.2	24.5
	3H	23.3	23.9	23.6	24.3	24.7	23.4	24.1	23.8	24.5	24.8
	4H	23.6	24.2	24.0	24.5	24.9	23.6	24.2	24.0	24.5	24.9
	6H	23.8	24.4	24.3	24.8	25.2	23.6	24.2	24.1	24.6	25.0
	8H	24.0	24.4	24.4	24.9	25.3	23.7	24.1	24.1	24.6	25.0
	12H	24.0	24.5	24.5	24.9	25.4	23.6	24.1	24.1	24.5	25.0
8H	4H	23.7	24.1	24.1	24.6	25.0	24.0	24.4	24.4	24.9	25.3
	6H	24.0	24.4	24.5	24.9	25.4	24.1	24.5	24.6	25.0	25.5
	8H	24.2	24.6	24.7	25.0	25.5	24.2	24.6	24.7	25.0	25.5
	12H	24.4	24.7	24.9	25.2	25.7	24.3	24.6	24.8	25.1	25.6
12H	4H	23.6	24.1	24.1	24.5	25.0	24.0	24.5	24.5	24.9	25.4
	6H	24.1	24.4	24.6	24.9	25.4	24.3	24.6	24.8	25.1	25.6
	8H	24.3	24.6	24.8	25.1	25.6	24.4	24.7	24.9	25.2	25.7
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.6					0.4 / -0.6				
	1.5H	1.0 / -1.4					1.0 / -1.4				
	2.0H	2.0 / -1.8					2.0 / -1.8				