

Laser Distance Sensor

Triangulation

CP35MHT80 LASER


Part Number



- High resolution: 50 μm (resolution-mode)
- Linearity: 0,15 % (resolution-mode)
- Measured value independent of material, color and brightness
- Response time: < 1250 μs (speed-mode)
- Zoom function

These sensors work with a high-resolution CMOS line and DSP technology and determine distance using angular measurement. As a result, material, color and brightness related measurement differences are virtually eliminated.

Integrated analogue output can be configured for voltage 0...10 V (10...0 V) or current 4...20 mA (20...4 mA).

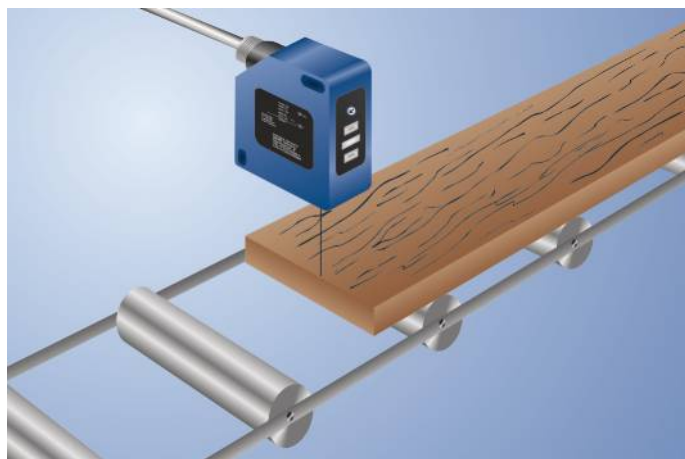

Technical Data

Optical Data

Working Range	50...350 mm
Measuring Range	300 mm
Resolution	50 μm
Resolution (Speed-Mode)	80 μm
Linearity	0,15 %
Linearity (Speed-Mode)	0,2 %
Linearity Deviation	450 μm
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 80 mA
Measuring Rate	800 /s
Measuring Rate (Resolution-Mode)	400 /s
Response Time	< 1250 μs
Response Time (Resolution Mode)	< 2500 μs
Temperature Drift	< 25 $\mu\text{m/K}$
Temperature Range	-25...50 °C
Analog Output	0...10 V
Load Current Voltage Output	< 1 mA
Current Output Load Resistance	< 500 Ohm
Interface	RS-232
Baud Rate	38400 Bd
Protection Class	III
FDA Accession Number	0820590-000

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 8-pin

Safety-relevant Data


MTTFd (EN ISO 13849-1)	713,97 a
------------------------	----------

Error Output	●
Analog Output	●
RS-232 Interface	●

Connection Diagram No.	529
Control Panel No.	P7
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	380


Complementary Products

Analog Evaluation Unit AW02
Fieldbus Gateway ZAGxxxN01, EPGG001
Interface Cable S232W3
Protective Housing ZSV-0x-01
Set Protective Housing ZSP-NN-02
Software

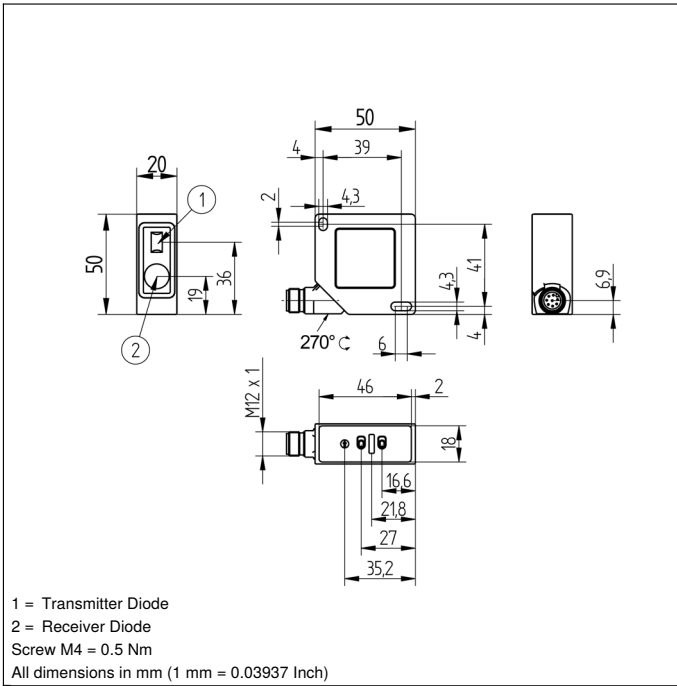


Ctrl. Panel

P7



- 03 = Error Indicator
- 07 = Selector Switch
- 12 = Analog Output Indicator
- 24 = Plus Button
- 25 = Minus Button
- 63 = Analog Output Current Indicator

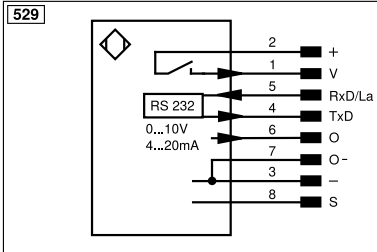


Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
PT	Platinum measuring resistor	ENAR5422	Encoder A/Ā (TTL)
			Encoder B/B̄ (TTL)
			ENA Encoder A
			ENb Encoder B
			AMIN Digital output MIN
			AMAX Digital output MAX
			Ack Digital output OK
			SY In Synchronization In
			SY OUT Synchronization OUT
			OLT Brightness output
			M Maintenance
			rsv Reserved
			Wire Colors according to DIN IEC 60757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow

Table 1

Working Distance	50 mm	350 mm
Spot Size	0,6 × 1,5 mm	1,5 × 4 mm

Output Graph

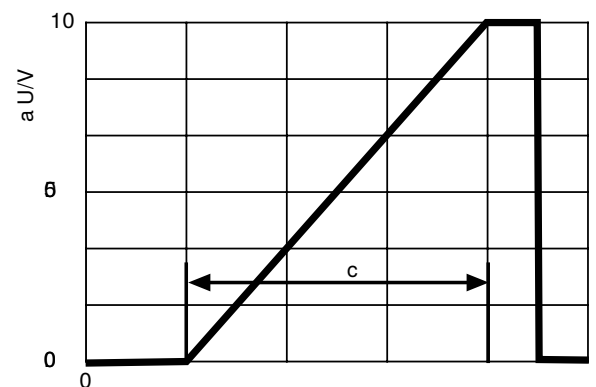

c = Measuring Range

a = Analog Voltage Output

