




aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
**pneumatics**  
process control  
sealing & shielding

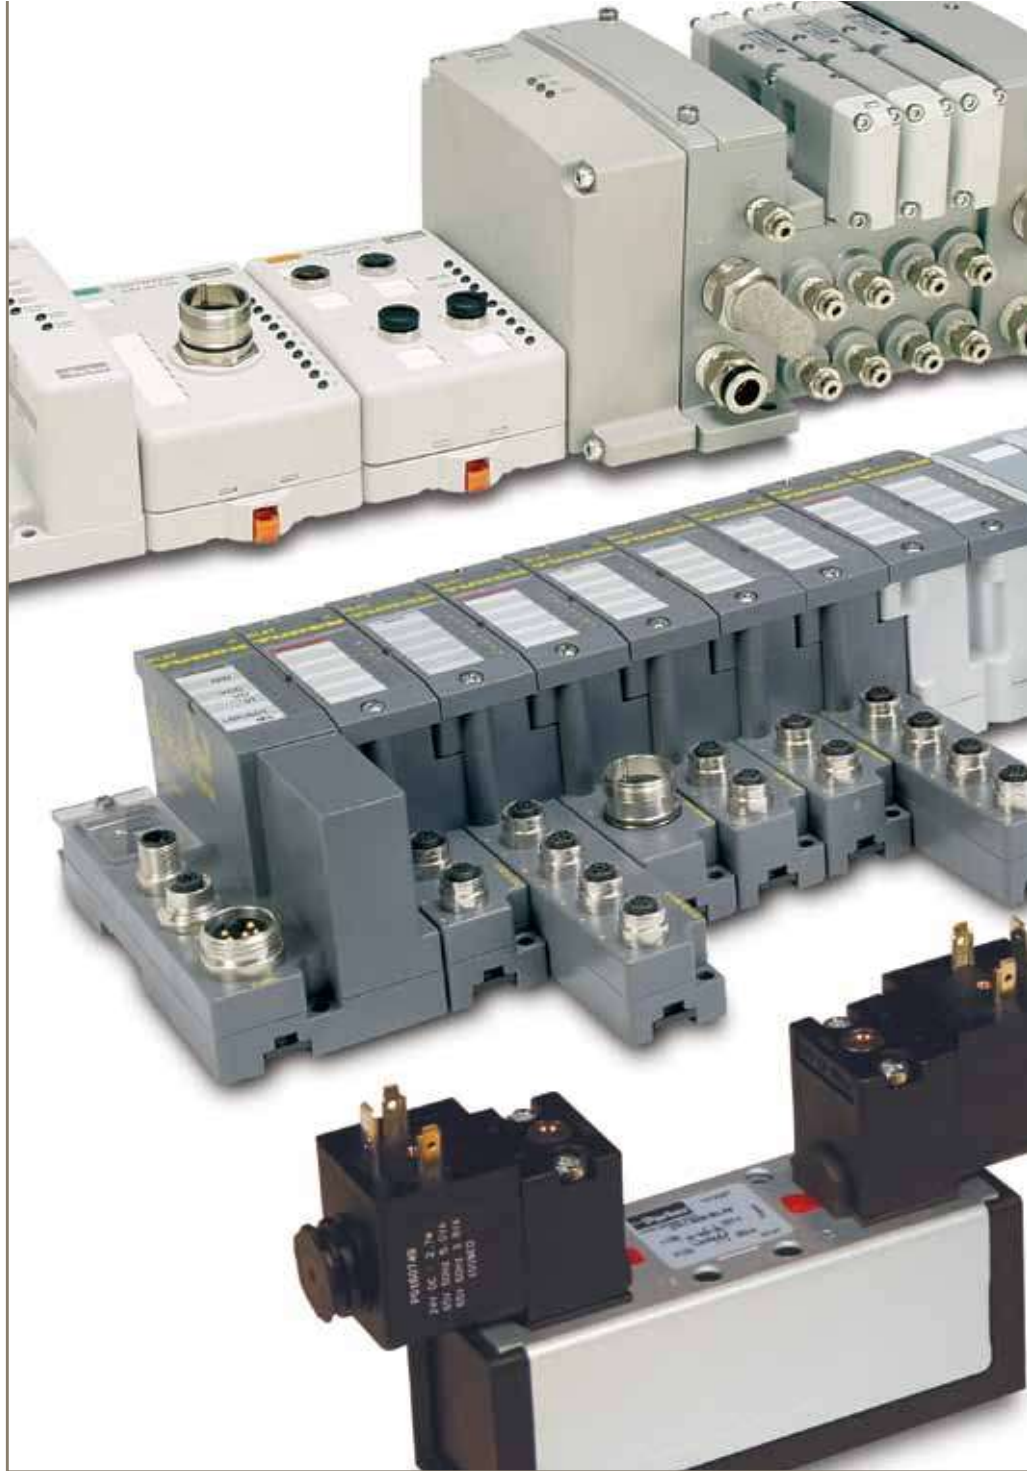

# Global ISO Valves ISOMAX / ISYS

A complete range of pneumatic ISO valves

## Industrial Communication

Catalogue PDE2589TCUK November 2013










ENGINEERING YOUR SUCCESS.

## ISOMAX - ISO 5599-1 - Sizes 1, 2 & 3

### Valve alone without operator








With direct valve spool manual override

Symbol	Description	Size	Weight (g)	Order code	
		5/2 Single pilot - Spring return	1 - 43 mm	350	<b>DX1-621-70</b>
		2 - 56 mm	600	<b>DX2-621-70</b>	
		3 - 71 mm	1100	<b>DX3-621-70</b>	
	5/2 Single pilot - Differential	1 - 43 mm	350	<b>DX1-651-70</b>	
		2 - 56 mm	600	<b>DX2-651-70</b>	
		3 - 71 mm	1100	<b>DX3-651-70</b>	
	5/2 Double pilot	1 - 43 mm	350	<b>DX1-606-70</b>	
		2 - 56 mm	600	<b>DX2-606-70</b>	
		3 - 71 mm	1100	<b>DX3-606-70</b>	
	5/3 Closed Center	1 - 43 mm	350	<b>DX1-616-70</b>	
		2 - 56 mm	600	<b>DX2-616-70</b>	
		3 - 71 mm	1100	<b>DX3-616-70</b>	
	5/3 Vented Center	1 - 43 mm	350	<b>DX1-611-70</b>	
		2 - 56 mm	600	<b>DX2-611-70</b>	
		3 - 71 mm	1100	<b>DX3-611-70</b>	
	5/3 Pressurised Center	1 - 43 mm	350	<b>DX1-613-70</b>	
		2 - 56 mm	600	<b>DX2-613-70</b>	

## ISOMAX - ISO 5599-1 - Sizes 1, 2 & 3

### Valve alone without operator

Without direct valve spool manual override

Symbol	Description	Size	Weight (g)	Order code	
		5/2 Single pilot - Spring return	1 - 43 mm	350	<b>DX1-621-60</b>
		2 - 56 mm	600	<b>DX2-621-60</b>	
		3 - 71 mm	1100	<b>DX3-621-60</b>	
	5/2 Single pilot - Differential	1 - 43 mm	350	<b>DX1-651-60</b>	
		2 - 56 mm	600	<b>DX2-651-60</b>	
		3 - 71 mm	1100	<b>DX3-651-60</b>	
	5/2 Double pilot	1 - 43 mm	350	<b>DX1-606-60</b>	
		2 - 56 mm	600	<b>DX2-606-60</b>	
		3 - 71 mm	1100	<b>DX3-606-60</b>	
	5/3 Closed Center	1 - 43 mm	350	<b>DX1-616-60</b>	
		2 - 56 mm	600	<b>DX2-616-60</b>	
		3 - 71 mm	1100	<b>DX3-616-60</b>	
	5/3 Vented Center	1 - 43 mm	350	<b>DX1-611-60</b>	
		2 - 56 mm	600	<b>DX2-611-60</b>	
		3 - 71 mm	1100	<b>DX3-611-60</b>	
	5/3 Pressurised Center	1 - 43 mm	350	<b>DX1-613-60</b>	
		2 - 56 mm	600	<b>DX2-613-60</b>	