
E11807

Connecting cable with socket

ADOGH080MSS0005H08



For 8-pole sockets the core colours are not standardised. Please note the wiring of the sensor and the sockets (see data sheet).

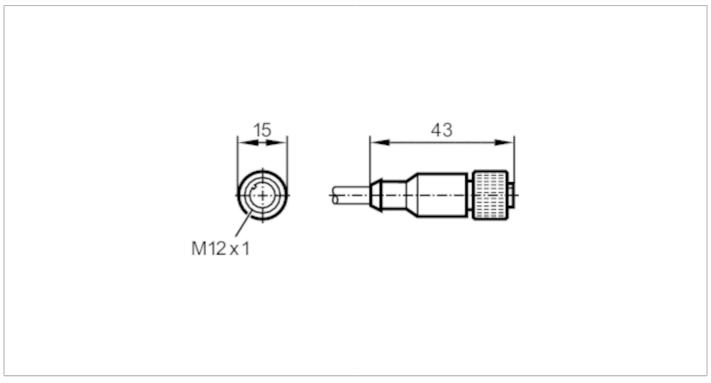

C€ RK

| Application | | | |
|--------------------------------------------------------------|------|----------------------|--|
| Special feature | | Halogen-free | |
| Electrical data | | | |
| Operating voltage | [V] | < 30 AC / < 36 DC | |
| Operating conditions | | | |
| Ambient temperature | [°C] | -2580 | |
| Protection | | IP 68 | |
| Mechanical data | | | |
| Weight | [g] | 313.7 | |
| Dimensions | [mm] | 15 x 15 x 43 | |
| Materials | | PUR | |
| Moulded-body material | | PUR | |
| Material nut | | brass, nickel-plated | |
| Remarks | | | |
| Pack quantity | | 1 pcs. | |
| Electrical connection | | | |
| Cable: F. m. DLD. Halagen free, black Ø.6.2 mm; 9 v.0.25 mm? | | | |

Cable: 5 m, PUR, Halogen-free, black, Ø 6.2 mm; 8 x 0.25 mm²

Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm

E11807

Connecting cable with socket

ADOGH080MSS0005H08





Connection

| _1 | BN |
|----------------|----|
| $\frac{2}{2}$ | WH |
| 3 | BU |
| <u>4</u> | BK |
| 5 5 | GY |
| <u>6</u> | PK |
| $\frac{7}{2}$ | VT |
| 2 ⁸ | OG |
| _ | |

colours to DIN EN Core colours : 60947-5-2 BK = black BN = brown BU = blue GY = grey PK = pink OG = orange VT = lilac WH = white