


Single-axis controllers

Mechanical installation

Devices in the range 32 ... 104 A (15 ... 55 kW)

3.6.3

Devices in the range 32 ... 104 A (15 ... 55 kW)

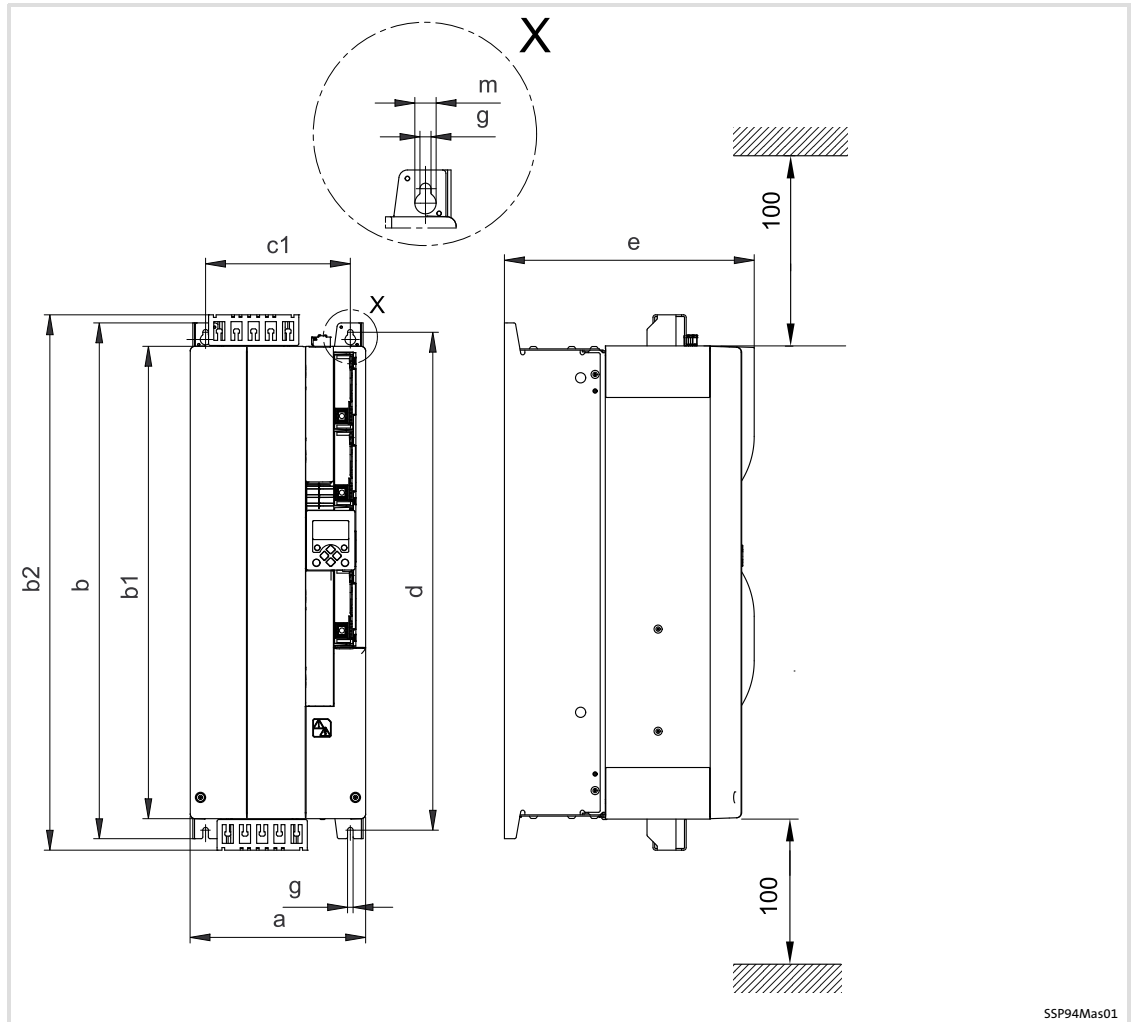

SSP94Mas01

Fig. 3-16 Dimensions [mm]

Type	Dimensions [mm]									Weight [kg]	Device size
	a	b	b1	b2	e	c1	d	g	m		
E94xSxE0324	206	606	556	630	294	170	585	6.5	12.5	26.5	6
E94xSxE0474											
E94xSxE0594											
E94xSxE0864	266	706	655	729	370	230	685	6.5	12.5	42	7
E94xSxE1044											