


Decentralized Serial Wiring (GW System, 4 Branches) Series EX500



- ★ Valve manifold and input unit manifold can be connected around the GW unit.
- ★ Compatible with various protocols by replacing the GW unit.
- ★ Compatible with 64-digital-outputs (16 points x 4 branches) and 64-digital-inputs (16 points x 4 branches).
- ★ GW unit, Input unit manifold: IP65
- ★ Valve manifold including SI unit: IP67

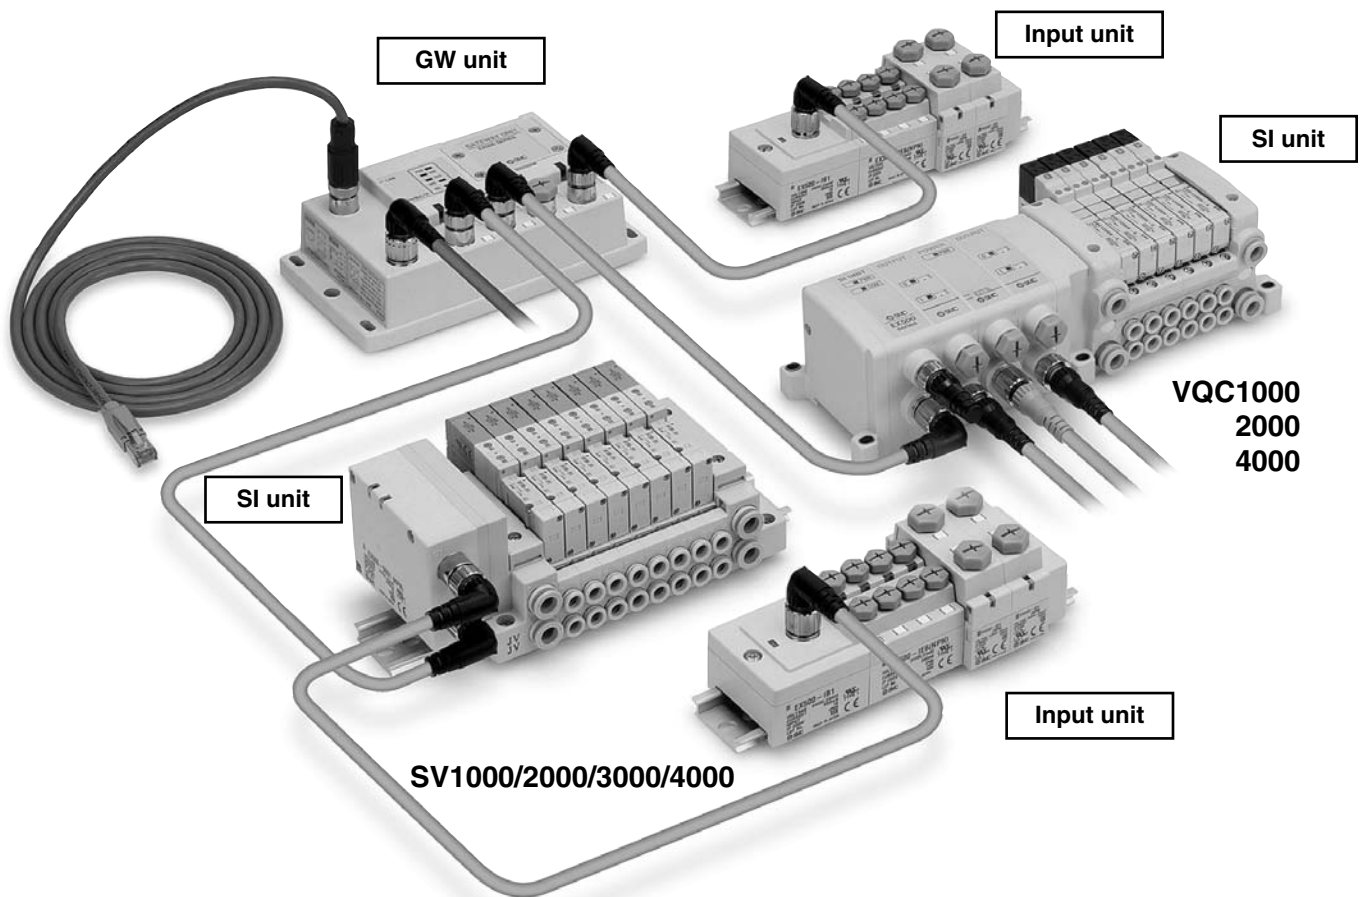

How to Order GW Unit

GW Unit

EX500 – G **DN1**

• Communication protocol

DN1	DeviceNet
PR1A	PROFIBUS DP
MJ1	CC-Link
EN1	EtherNet/IP



GW Unit Specifications

Model		EX500-GDN1	EX500-GPR1A	EX500-GMJ1	EX500-GEN1	
Communication specification	Applicable system	Protocol	DeviceNet	PROFIBUS DP	CC-Link	EtherNet/IP
		Version ^{Note 1)}	Release 2.0	DP-V0	Ver. 1.10	Release 1.0
	Communication speed	125k/250k/500kbps	9.6 k/19.2 k/45.45 k/ 93.75 k/187.5 k/500 k/ 1.5 M/3 M/6 M/12 Mbps	156 k/625 k/ 2.5 M/5 M/10 Mbps	10 M/100 Mbps	
	Specified file ^{Note 2)}	EDS file	GSD file	—	EDS file	
	Occupied area (Number of inputs/outputs)	64/64	64/64	96/96 (3 stations, remote device station)	128/128	
Terminal resistor	Not applicable	Built in the unit (Switch setting)	Not applicable			
Power supply	For unit	11 to 25 VDC (Supplied by DeviceNet circuit, 50 mA or less)	24 VDC±20%			
	For sensors	24 VDC±20%				
	For valve	24 VDC±10%/–5%				
Internal current consumption (Unit)		200 mA or less (GW unit)				
Input specification	Number of inputs	64 points (16 points x 4 branches)				
	Connection input device	The EX500 series input unit manifold (connection from communication port A to D)				
	Supply voltage	24 VDC				
	Supply current	Max. 2.8 A (Max. 0.7 A per branch)				
Output specification	Number of outputs	64 points (16 points x 4 branches)				
	Connection output device	The EX500 series SI unit manifold (connection from communication port A to D)				
	Supply voltage	24 VDC				
	Supply current	Max. 3.0 A (Max. 0.75 A per branch)				
Branch cable length		5 m or less between connected devices (total extension 10 m or less)				
Environmental resistance	Enclosure	IP65				
	Operating temperature range	Operating: 5 to 45°C Stored: –25 to 70°C (with no freezing and condensation)				
	Operating humidity range	Operating, Stored: 35 to 85%RH (with no condensation)				
	Withstand voltage	1000 VAC for 1 min. between whole charging part and case				
	Insulation resistance	2 MΩ or more (500 VDC Mega) between whole charging part and case				
	Vibration resistance	10 to 150 Hz with a 0.7 mm amplitude or 50 m/s ² in each X, Y, Z direction for 2 hrs (De-energized)				
	Impact resistance	150 m/s ² in each X, Y, Z direction, 3 times (De-energized)				
Standard		CE marking, UL (CSA)				
Mass		470 g				
Accessory: Waterproof cap (for M12 connector socket)		EX500-AWTS (4 pcs.)	EX500-AWTS (5 pcs.)	EX500-AWTS (4 pcs.)	EX500-AWTS (5 pcs.)	

Note 1) Please note that the version is subject to change.

Note 2) Each file can be downloaded from SMC's website (<http://www.smcworld.com/>).


Note 3) For detailed specifications other than the above, refer to the separate technical operation manual can be downloaded from SMC's website (<http://www.smcworld.com/>).

EX


Series EX500

GW Unit Dimensions / Parts Description


EX500-GDN1 (DeviceNet)

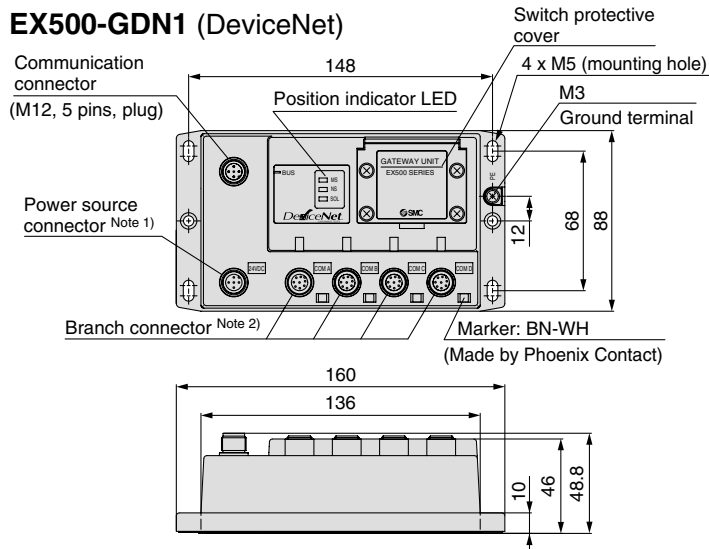


EX500-GPR1A (PROFIBUS DP)

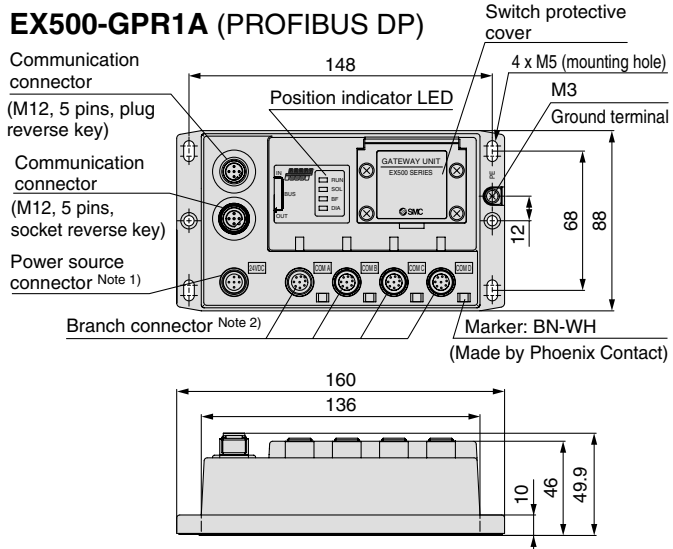

EX500-GMJ1 (CC-Link)

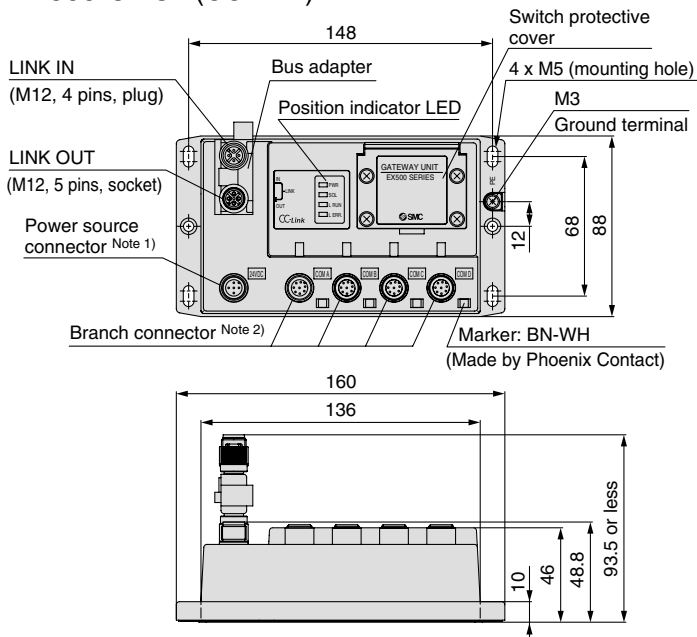

EX500-GEN1 (EtherNet/IP)

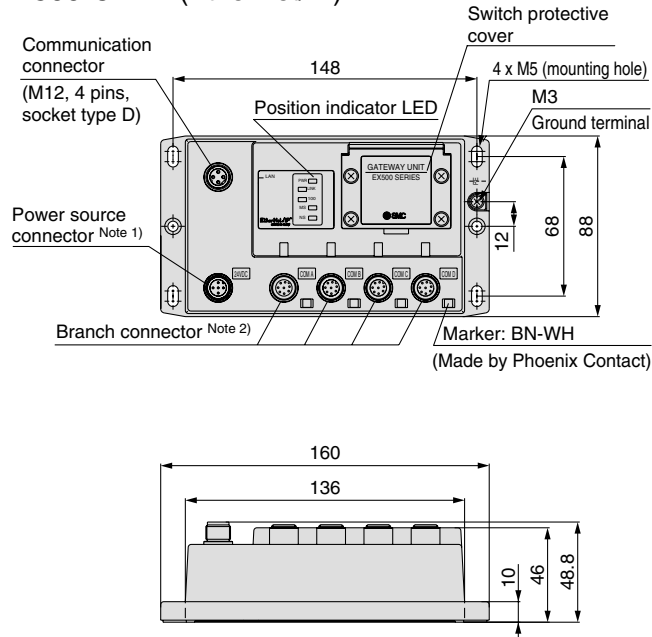

Note 1) Power supply connector specification

(M12, 5 pins, plug)

Note 2) Branch connector specification

(M12, 8 pins, socket)

How to Order Input Manifold

How to Order Input Block

Input Unit Manifold



EEX500-IB1-E 8

Connector type

E	M8 connector
T	M12 connector
M	M8, M12 mixed

Stations


1	1 station
⋮	⋮
8	8 stations

EX500-IE 1

Block type

1	M8 connector, 2 inputs, PNP specification
2	M8 connector, 2 inputs, NPN specification
3	M12 connector, 2 inputs, PNP specification
4	M12 connector, 2 inputs, NPN specification
5	M8 connector, 8 points integrated type, PNP specification
6	M8 connector, 8 points integrated type, NPN specification


For options, refer to pages 1689 to 1694.

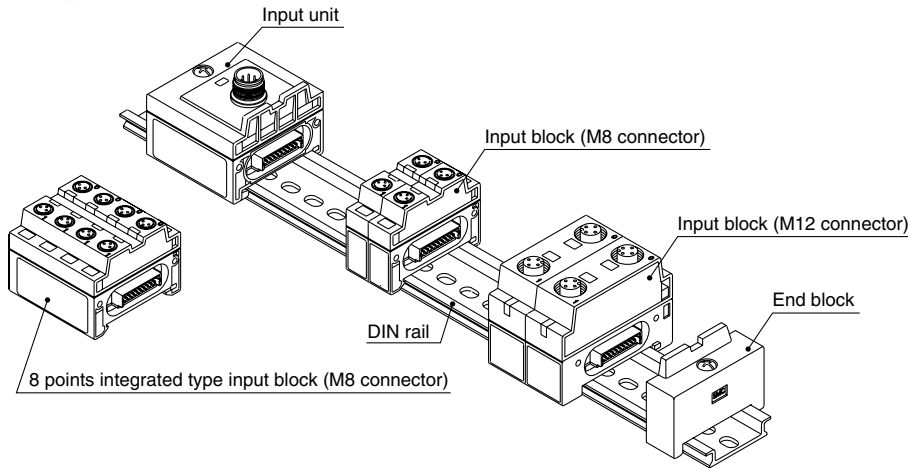


How to Order Input Unit Manifold [Ordering Example]

EX



When ordering an input unit manifold, enter the **Input manifold part no.** + **Input block part no.**
 The **Input unit**, **End block** and **DIN rail** are included in the input manifold. Refer to the indications below.





Example 1) M8 input block only

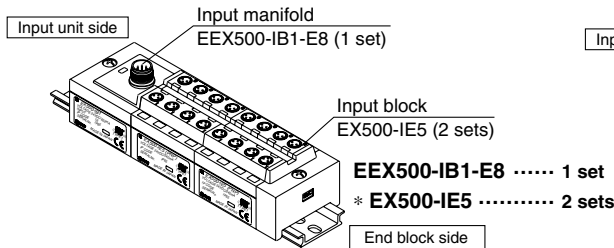

Example 2) M12 input block only

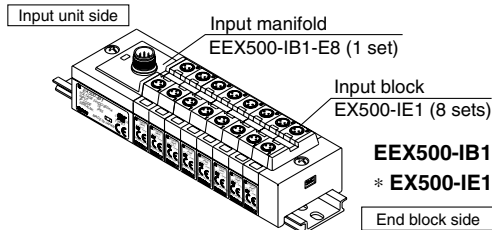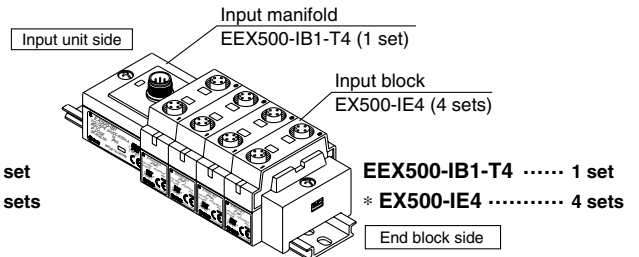

Example 3) M8, M12 mixed

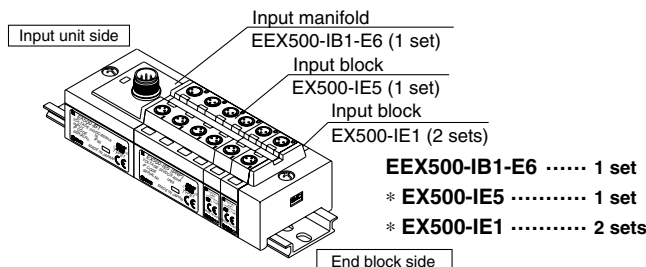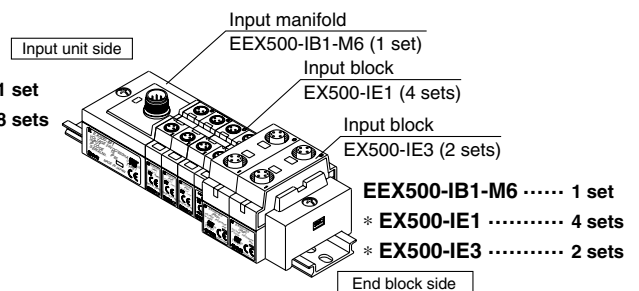

Note • Since the 8 points integrated type input block is equivalent to the length of four stations on an M8 input block, pay attention to the number of stations on an input manifold.
 • When an input block layout becomes complicated, indicate in the input unit manifold specification sheet.

Series EX500

Input Unit Specifications

Model		EX500-IB1
Internal current consumption		100 mA or less
Input specification	Number of inputs	16 points
	Connection block	The EX500 series input block (possible to be positioned with others)
	Connection block stations	2-input, input block: Max. 8 stations 8-input, input block: Max. 2 stations
Environmental resistance	Enclosure	IP65
	Operating temperature range	Operating: 5 to 45°C Stored: -25 to 70°C (with no freezing and condensation)
	Operating humidity range	Operating, Stored: 35 to 85%RH (with no condensation)
	Withstand voltage	1000 VAC for 1 min. between whole charging part and case
	Insulation resistance	2 MΩ or more (500 VDC Mega) between whole charging part and case
	Vibration resistance	10 to 150 Hz with a 0.7 mm amplitude or 50 m/s ² in each X, Y, Z direction for 2 hrs (De-energized)
	Impact resistance	150 m/s ² in each X, Y, Z direction, 3 times (De-energized)
Standard		CE marking, UL (CSA)
Mass		100 g (Input unit + End block)


Input Block Specifications

Model		EX500-IE1	EX500-IE2	EX500-IE3	EX500-IE4	EX500-IE5	EX500-IE6	
Input specification	Input type	PNP sensor input	NPN sensor input	PNP sensor input	NPN sensor input	PNP sensor input	NPN sensor input	
	Number of inputs	2 points				8 points		
	Input device supply voltage	24 VDC						
	Input device supply current	Max. 480 mA/Input unit manifold						
	Rated input current	Approx. 5 mA						
	Display	Green LED (Lights when power is turned ON.)						
	Connector on the input device side	M8 connector (3 pins, plug)		M12 connector (4 pins, plug)		M8 connector (3 pins, plug)		
Environmental resistance	Enclosure	IP65						
	Operating temperature range	Operating: 5 to 45°C Stored: -25 to 70°C (with no freezing and condensation)						
	Operating humidity range	Operating, Stored: 35 to 85%RH (with no condensation)						
	Withstand voltage	1000 VAC for 1 min. between whole charging part and case						
	Insulation resistance	2 MΩ or more (500 VDC Mega) between whole charging part and case						
	Vibration resistance	10 to 150 Hz with a 0.7 mm amplitude or 50 m/s ² in each X, Y, Z direction for 2 hrs (De-energized)						
Impact resistance	150 m/s ² in each X, Y, Z direction, 3 times (De-energized)							
Standard		CE marking, UL (CSA)						
Mass		20 g		40 g		55 g		
Accessory: Waterproof cap	(for M8 connector socket)	EX500-AWES (2 pcs.)		—		EX500-AWES (8 pcs.)		
	(for M12 connector socket)	—		EX500-AWTS (2 pcs.)		—		

Note) For detailed specifications other than the above, refer to the separate technical operation manual that can be downloaded from SMC's website (<http://www.smcworld.com/>).


Input Unit Manifold Dimensions / Parts Description

Input block (M8) only

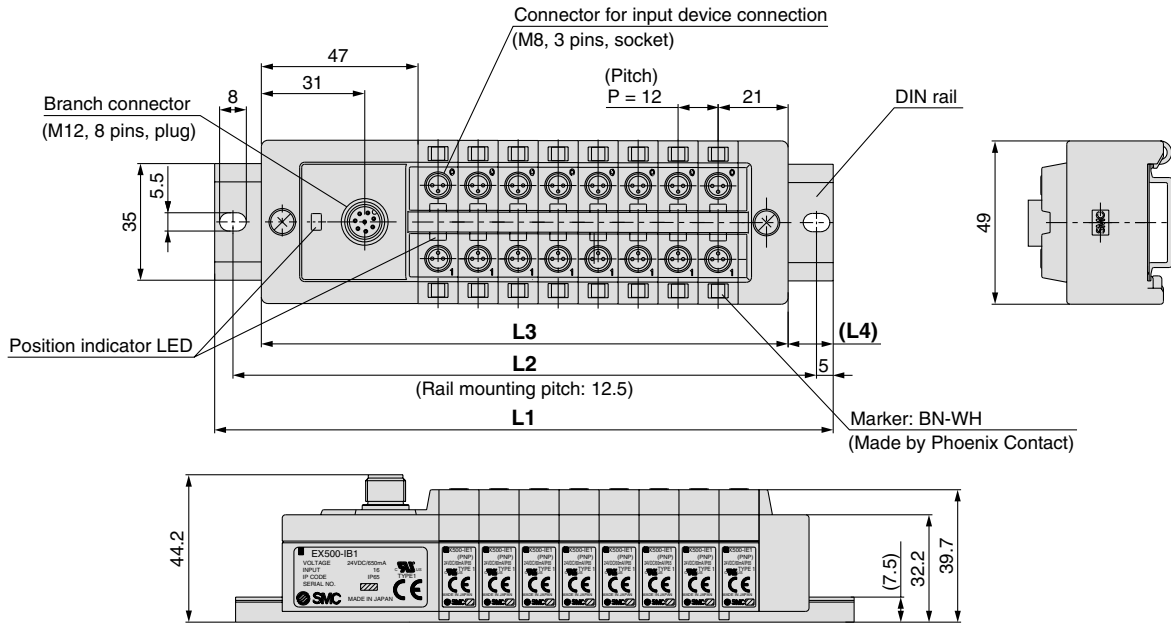

Stations	1	2	3	4	5	6	7	8
Rail length L1	98	110.5	123	135.5	148	160.5	173	185.5
Mounting pitch L2	87.5	100	112.5	125	137.5	150	162.5	175
Manifold length L3	74	86	98	110	122	134	146	158
L4	12	12	12.5	12.5	13	13	13.5	13.5

Input block (M12) only

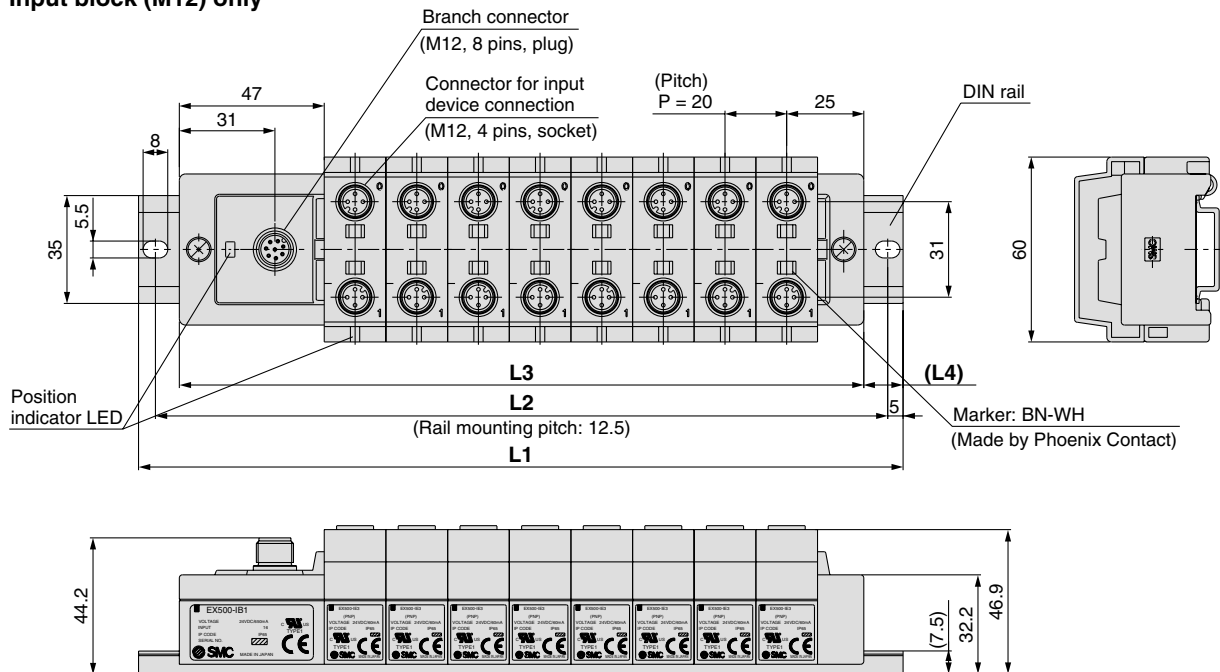


Stations	1	2	3	4	5	6	7	8
Rail length L1	110.5	123	148	173	185.5	210.5	223	248
Mounting pitch L2	100	112.5	137.5	162.5	175	200	212.5	237.5
Manifold length L3	82	102	122	142	162	182	202	222
L4	12	12	12.5	12.5	13	13	13.5	13.5

EX

Series EX500

Input Unit Manifold Exploded View

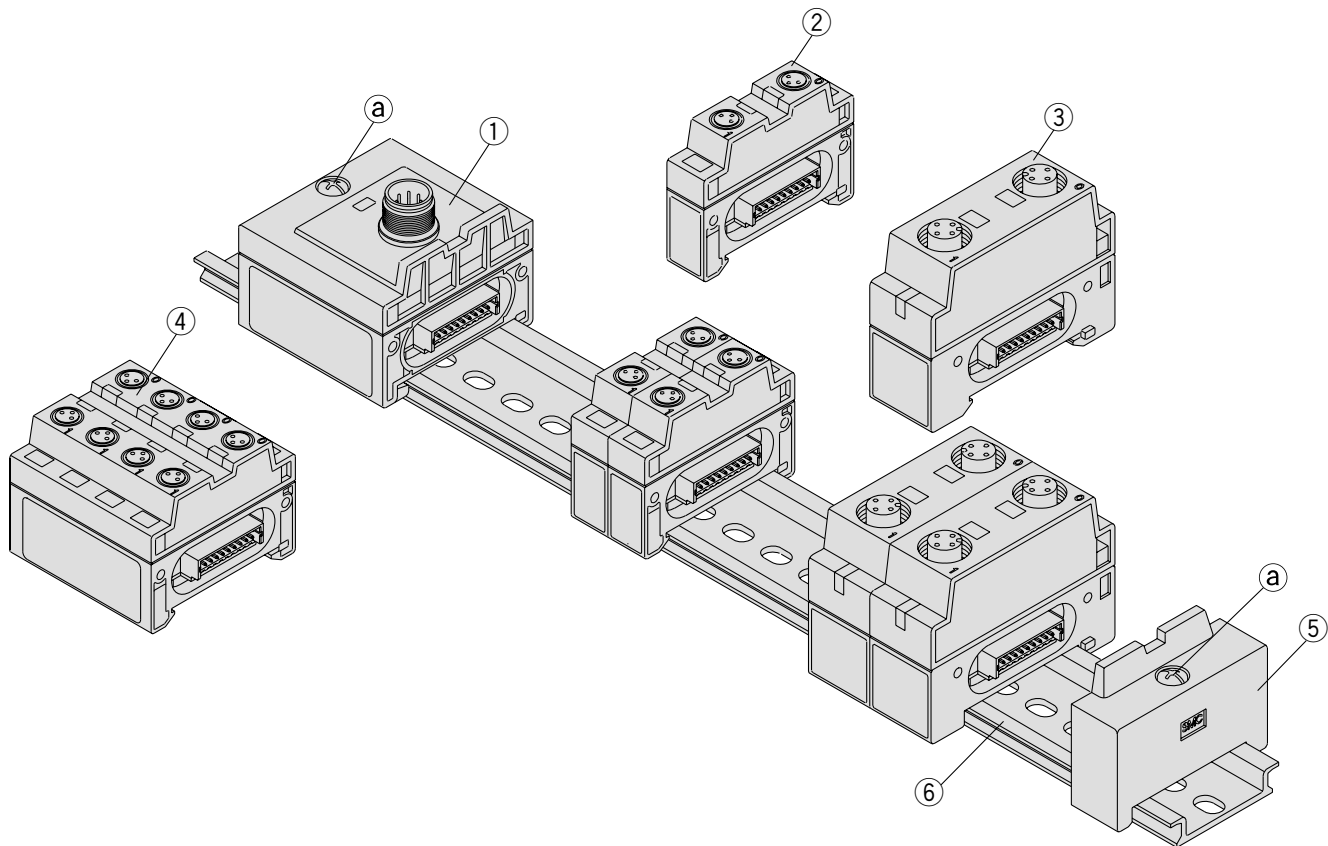

Parts List

No.	Description	Part no.	Note
		For standard	
1	Input unit	EX500-IB1	
2	Input block (M8 connector)	EX500-IE□	PNP specification ... □: 1, NPN specification ... □: 2
3	Input block (M12 connector)	EX500-IE□	PNP specification ... □: 3, NPN specification ... □: 4
4	Input block (M8 connector) 8 points integrated type	EX500-IE□	PNP specification ... □: 5, NPN specification ... □: 6
5	End block	EX500-EB1	
6	DIN rail	VZ1000-11-1-□	□: No. based on L dimension (Refer to the table below.)

How to add input block stations

- 1 Loosen the screws ③ (2 places) that hold the end block.
- 2 Separate the blocks at the locations where stations are to be added.
- 3 Attach the additional blocks to the DIN rail, and connect the blocks so that they fit together securely.
- 4 While holding the blocks together so that there are no gaps between them, secure them to the DIN rail by tightening the screws ③.
Note: Be sure to tighten the round head combination screw with the prescribed tightening torque. (0.6 N·m)

DIN Rail L Dimensions [mm]

Stations	M8 input block (m)										Connector type For E (m = 1 to 8)	No.	L dimension	No.	L dimension
	0	1	2	3	4	5	6	7	8	0		7	185.5		
M12 input block (n)	0	0	1	2	3	4	5	6	7	8	1	110.5	8	198	
	1	1	2	3	4	5	6	7	8	2	123	9	210.5		
	2	2	3	4	5	6	7	8	3	135.5	10	223			
	3	3	4	5	6	7	8	4	148	11	235.5				
	4	4	5	6	7	8	5	160.5	12	248					
	5	5	6	7	8	6	173								
	6	6	7	8	7										
	7	7	8	8											
	8	8	9												


L dimensions

Connector type
For M (m + n = 2 to 8)

Connector type
For T (n = 1 to 8)

How to Order SI Unit

SI Unit
SV1000/2000/3000/4000

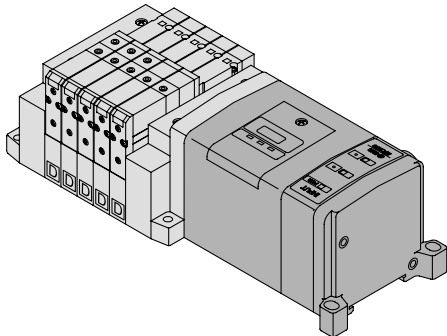

EX500 – S001

● Applicable solenoid valve: **SV series**

For options, refer to pages 1689 to 1694.

SI Unit Specifications (EX500-S001)


Model		EX500-S001
Internal current consumption		100 mA or less
Output specification	Number of outputs	16 points
	Connection block	Solenoid valve (single, double) Relay output module (1 output, 2 outputs)
	Connection block stations	Double solenoid valve, relay output module (2 outputs): Max. 8 stations Single solenoid valve, relay output module (1 output): Max. 16 stations
	Connection block supply current	Max. 0.65 A
Environmental resistance	Enclosure	IP67
	Operating temperature range	Operating: 5 to 45°C Stored: -25 to 70°C (with no freezing and condensation)
	Operating humidity range	Operating, Stored: 35 to 85%RH (with no condensation)
	Withstand voltage	1000 VAC for 1 min. between whole charging part and case
	Insulation resistance	2 MΩ or more (500 VDC Mega) between whole charging part and case
	Vibration resistance	10 to 150 Hz with a 0.7 mm amplitude or 50 m/s ² in each X, Y, Z direction for 2 hrs (De-energized)
	Impact resistance	150 m/s ² in each X, Y, Z direction, 3 times (De-energized)
Standard		CE marking, UL (CSA)
Mass		115 g
Accessory: Waterproof cap (for M12 connector socket)		EX500-AWTS (1 pc.)

Note) For detailed specifications other than the above, refer to the separate technical operation manual that can be downloaded from SMC's website (<http://www.smcworld.com/>).

EX

SI Unit Dimensions / Parts Description

EX500-S001

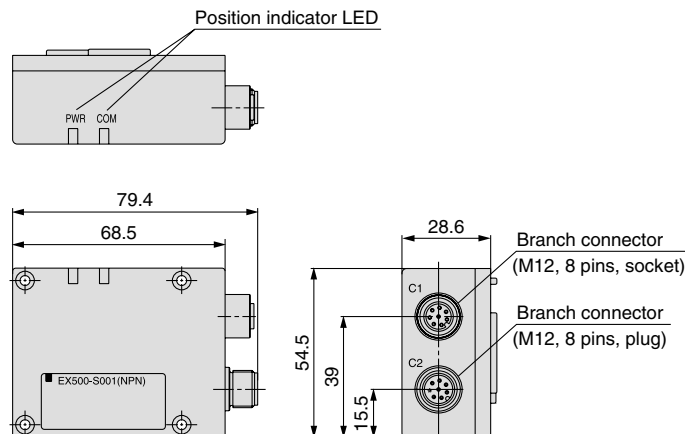



Series EX500

How to Order SI Unit

SI Unit

VQC1000/2000/4000

S0700



EX500-Q001

Applicable solenoid valve:
VQC/S0700 series

SI unit COM.

0	+COM.
1	-COM.

SI unit type

1	For without EX9 output block
2	For EX9 output block mounting

For options, refer to page 1689 to 1694.

SI Unit Specifications (EX500-Q□0□)


Model	EX500-Q001	EX500-Q101	EX500-Q002	EX500-Q102	
Internal current consumption	100 mA or less				
Output specification	Number of outputs	16 points			
	Output type	NPN output (sink type)	PNP output (source type)	NPN output (sink type)	PNP output (source type)
	Connection block	+COM. Solenoid valve (single, double)	-COM. Solenoid valve (single, double)	+COM. ^{Note)} Output block, power block Solenoid valve (single, double)	-COM. ^{Note 1)} Output block, power block Solenoid valve (single, double)
	Connection block stations	Double solenoid valve: Max. 8 stations Single solenoid valve: Max. 16 stations		Double solenoid valve, output block: Max. 8 stations Single solenoid valve: Max. 16 stations * Power block is not included.	
	Connection block supply current	Max. 0.75 A			
Environmental resistance	Enclosure	IP67			
	Operating temperature range	Operating: 5 to 45°C Stored: -25 to 70°C (with no freezing and condensation)			
	Operating humidity range	Operating, Stored: 35 to 85%RH (with no condensation)			
	Withstand voltage	1000 VAC for 1 min. between whole charging part and case			
	Insulation resistance	2 MΩ or more (500 VDC Mega) between whole charging part and case			
	Vibration resistance	10 to 150 Hz with a 0.7 mm amplitude or 50 m/s ² in each X, Y, Z direction for 2 hrs (De-energized)			
Impact resistance	150 m/s ² in each X, Y, Z direction, 3 times (De-energized)				
Standard	CE marking, UL (CSA)				
Mass	105 g				
Accessory: Waterproof cap (for M12 connector socket)	EX500-AWTS (1 pc.)				

Note 1) For details of output block and power block, refer to page 1692.


Note 2) For detailed specifications other than the above, refer to the separate technical operation manual that can be downloaded from SMC's website (<http://www.smcworld.com/>).

SI Unit Dimensions / Parts Description


EX500-Q□01

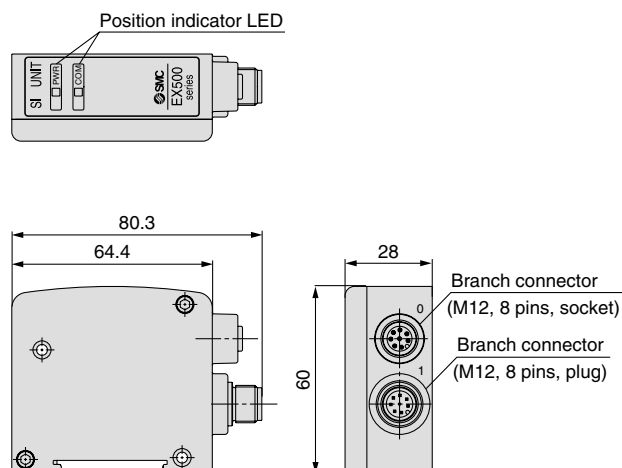

EX500-Q□02

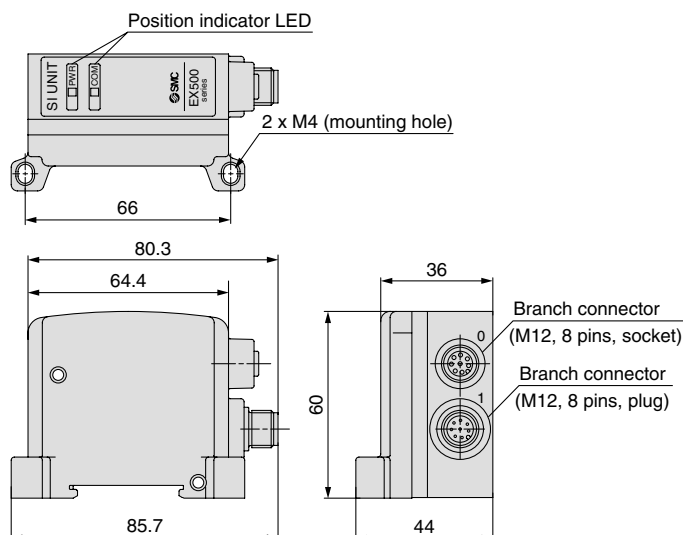

Options

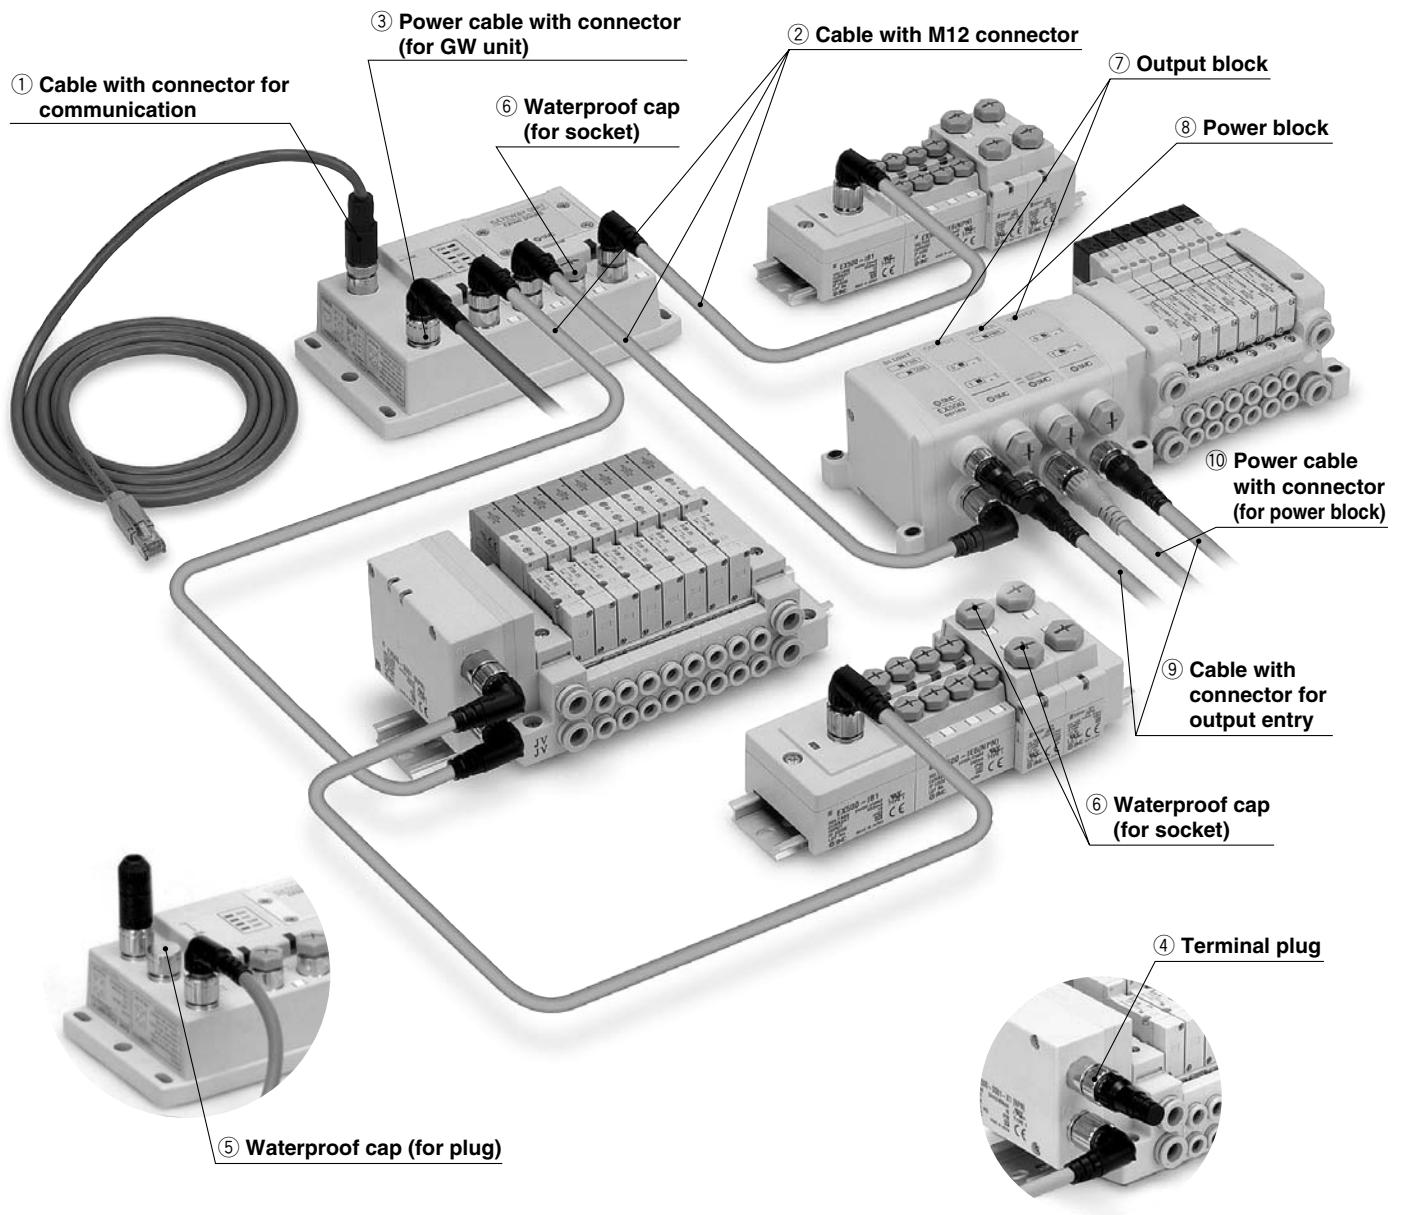

EX