

# G-MGW125

Technical specifications



### Operating mode:

By rotating the semi-cylindrical bolt by 180°, the upper assembly (1) and the lower assembly (2) are braced in a form-closed manner


### Advantages:

- Withstands high loads with low dead weight
- Can be released and closed with one handle
- High repeat accuracy +/- 0.02 mm
- Resilient locking pin secures hand lever against independent releasing
- Holds up to 5,000 changing cycles
- During locking, the lower assembly is pulled around the locking stroke
- Interface acc. to DIN EN ISO 9409-1
- Optional connection of a Multi energy coupling **MEK**



Technical specifications	MGW125	
Basic material	Al. anod.	St, nitrated
External diameter x Height [mm]	125 x 50	
Pitch circle diameter [mm]	100	
Repeat accuracy +/- [mm]	0,02	
Tension Fz [N]	1.500	5.200
Compression -Fz [kN]	377	754
Torsion Mz [Nm]	150	210
Bending Mx, My [Nm]	180	250
Mass [kg]	upper assembly	1,3
	lower assembly	0,55
Recommended load [kg] *	40	55
Locking torque VM [Nm]	2 – 16	3 – 20
Locking stroke VH [mm]	0 - 8	

\* This guideline applies to the following assumptions:  
Acceleration: 10 m/s<sup>2</sup>, gravity distance: 100 mm, double safety

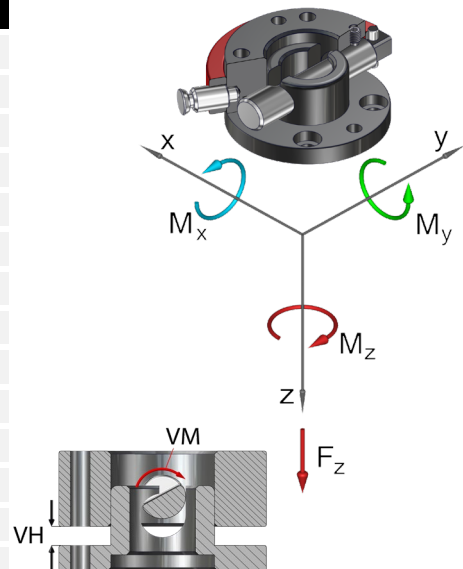

### Manual gripper change system Ø125, drilled acc. to ISO...

G-MGW125-2O	upper assembly, Al, anodized
G-MGW125-2OE	upper assembly, E-Mounting, Al, anodized
G-MGW125-2OEN	upper assembly, E-Mounting, steel, nitrated
G-MGW125-2O-N	upper assembly, steel, nitrated
G-MGW125-2U	lower assembly, Al, anodized
G-MGW125-2UE	lower assembly, E-Mounting, Al, anodized
G-MGW125-2UEN	lower assembly, E-Mounting, steel, nitrated
G-MGW125-2U-N	lower assembly, steel, nitrated

### Replacement semi-cylindrical bolt...

EG-MGW125-HB	for MGW125
EG-MGW125-HB-VA	for MGW125, out off VA

### Replacement hand lever

EG-MGW125-HH	for MGW125
--------------	------------

Pos.	Description
1	Upper assembly
2	Semi-cylindrical bolt
3	Hand lever
4	Index pin
5	Cylinder bolt
6	Spring locking pin
7	Setscrew
8	Lower assembly

