

Hydro-electric pressure switch

Type HED 8

RE 50061

Edition: 2016-09

Replaces: 06.15



TB0004+TB0040

- ▶ Component series 2X
- ▶ Max. operating pressure 630 bar



Features

- ▶ For subplate mounting
- ▶ For G1/4" pipeline installation
- ▶ For flange connection according to ISO 16873
- ▶ As vertical stacking element in connection with sandwich plates according to ISO 4401
- ▶ 5 pressure ratings
- ▶ 4 adjustment types:
 - Spindle with/without protective cap
 - Spindle with scale, with/without protective cap
 - Rotary knob with scale
 - Lockable rotary knob with scale
- ▶ Electrical connection
 - With valve connector of design A (large cubic connector)
 - with M12 x 1 connector
- ▶ Micro switch with NC/NO contact function
- ▶ Potential-free switching of currents from 1 mA to 2 A
- ▶ UL approval for pressure ranges up to 350 bar

Contents

Features	1
Ordering data	2
Function, section, symbol	3
Technical data	4
Characteristic curves: Switching pressure differential	6
Dimensions	7
Installation information	10
Ordering code: Sandwich plate size 6	12
Symbols, variant no.: Sandwich plate size 6	12
Dimensions: Sandwich plate size 6	13
Ordering code: Sandwich plate size 10	14
Symbols, variant no.: Sandwich plate size 10	14
Dimensions: Sandwich plate size 10	15
Electrical connection	16
Mating connectors	16
Further information	16

Ordering data

01	02	03	04	05	06	07	08
HED8		-	2X	/			*

01	Piston type pressure switch	HED8
02	Flange connection (ISO 16873)1)	OH
	Subplate mounting	OP
	Pipeline installation	OA
03	Component series 60 ... 69 (60 ... 69: unchanged installation and connection dimensions)	2X
04	Max. pressure rating 50 bar	50
	Max. pressure rating 100 bar	100
	Max. pressure rating 200 bar	200
	Max. pressure rating 350 bar	350
	Max. pressure rating 630 bar	630 2)

Electrical connection

05	Individual connection	
	Without mating connector; connector DIN EN 175301-803	K14 3)
	Without mating connector; connector IEC 61076-2-101, M12 x 1, A-coding	K35 3)

Adjustment type

06	Spindle with internal hexagon, without scale, without protective cap	no code
	Spindle with internal hexagon, without scale, with protective cap, sealing	S
	Spindle with scale, without protective cap	A 5)
	Spindle with scale, with protective cap	AS 5)
	lockable rotary knob with scale	KS 4; 5)
	Rotary knob with scale	KW 5)

Seal material

07	NBR seals	no code
	FKM seals	V
	Low-temperature seal (max. 315 bar)	MT
	Observe compatibility of seals with hydraulic fluid used! (Other seals upon request)	
08	Further details in the plain text	

- 1) Sandwich plate for vertical stacking, separate order, see accessories
- 2) Not permissible for vertical stacking, not with low-temperature seal, without UL approval
- 3) Mating connectors, separate order, see accessories
- 4) H-key, material no. **R900008158**, is included in the scope of delivery
- 5) The exact setting of the switching pressure is only possible using a pressure gauge (scale is used as orientation)

Accessories

- ▶ Sandwich plates for vertical stacking see page 12 and 14.
- ▶ Mating connectors for the electrical connection see page 16.

Function, section



The hydro-electric pressure switch type HED 8 is a piston type pressure switch. It basically comprises of housing (1), installation kit with piston (2), compression spring (3), adjustment element (4) and micro switch (5).

If the pressure to be monitored is below the set pressure, the micro switch (5) is operated. The pressure to be monitored is applied via the nozzle (7) at the piston (2). The piston (2) is supported by the spring plate (6) and acts against the continuously adjustable force of the compression spring (3). The spring plate (6) transmits the movement of the piston (2) onto the micro switch (5) and releases the latter when the set pressure is reached. This switches the electric circuit on or off, depending on the circuit set-up. The mechanical positive stop of the spring plate (6) protects the micro switch (5) in case of a sudden pressure drop from mechanical destruction and, in case of overpressure, prevents solid compression of the compression spring (3).

Notes:


In order to increase the life cycle, the pressure switch should be mounted with low vibrations and protected from hydraulic pressure surges.

Symbol

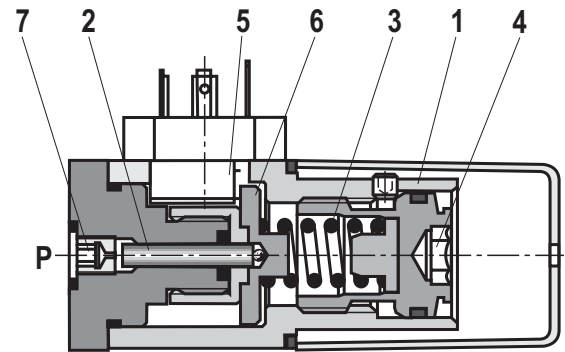


Type HED 8 **OH-2X/...K14**

Type HED 8 **OH-2X/...K14S**

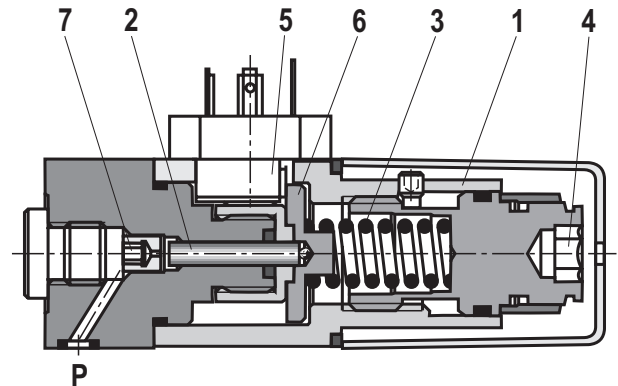

Type HED 8 **OP-2X/...K14A**

Type HED 8 **OP-2X/...K14AS**

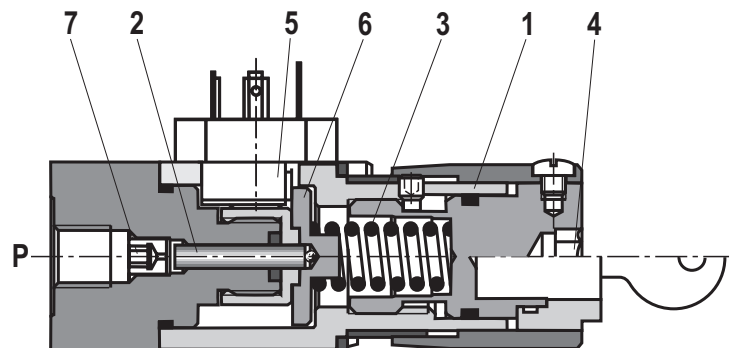

Type HED 8 **OA-2X/...K14KW**

Type HED 8 **OA-2X/...K14KS**

Technical data

(For applications outside these parameters, please consult us!)

General	
Mass	kg 0.8
Installation position	any
Ambient temperature range	°C -25 to +50 (NBR seals) -20 to +50 (FKM seals) -40 to +50 (low-temperature seals)
Sine test according to DIN EN 60068-2-6:1996-05	5...2000 Hz, max. 10 g, 10 double cycles
Transport shock according to DIN EN 60068-2-27:1995-03	15 g / 11 ms
Bump test according to DIN EN 60068-2-29:1995-03	25 g / 6 ms
Noise test according to DIN EN 60068-2-64:1996-05	20...2000 Hz 10...30 min
Conformity	<ul style="list-style-type: none"> ▶ CE DIN EN 61058-1: 2002 / A2: 2008 DIN EN 60947-1: 2007 / A1: 2011 DIN EN 60947-5-1: 2004 / A1: 2009 DIN EN 60529: 1991 / A2: 2013 ▶ UL UL 508 17th edition File No E223220 (up to 350 bar) ▶ CCC GB 14048.5-2008

Hydraulic						
Pressure rating	bar	50	100	200	350	630
Max. operating pressure						
Conformity						
▶ NBR/FKM seals	bar	350	350	350	400	630
▶ MT version	bar	315	315	315	315	–
Pressure adjustment range (decreasing)	bar	5...50	10...100	15...200	25...350	40...630
Pressure differential per rotation ¹⁾	bar	≈19	≈35	≈77	≈120	≈214
Hydraulic fluid ¹⁾		see table below				
Hydraulic fluid temperature range (at the valve operating ports)	°C	-25 ... +80 (NBR seals) -20 ... +80 (FKM seals) -40 ... +80 (low-temperature seals)				
Viscosity range	mm ² /s	10 ... 800				
Maximum permissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)		Class 20/18/15 ²⁾				
Load cycles		≥ 5 million				

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral base oils	HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM low-temperature seals	DIN 51524	90220
Bio-degradable	▶ Insoluble in water	HETG	ISO 15380	90221
		HEES		
	▶ Soluble in water	HEPG	ISO 15380	
Flame-resistant	▶ Water-free	HFDU, HFDR	ISO 12922	90222
	▶ Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	ISO 12922	90223



Important information on hydraulic fluids:

- ▶ For more information and data about the use of other hydraulic fluids, refer to data sheets above or contact us!
- ▶ There may be limitations regarding the technical data (temperature, pressure range, life cycle, maintenance intervals, etc.).

▶ Flame-resistant – contains water:

- Maximum pressure differential per control edge 50 bar
- Pressure pre-loading at the tank port > 20% of the pressure differential, otherwise increased cavitation
- Life cycle as compared to operation with mineral oil HL, HLP 50 to 100%

- ▶ **Bio-degradable and flame-resistant:** When using these hydraulic fluids that are simultaneously zinc-solvent, zinc may accumulate (700 mg zinc per pole tube).

Technical data

(For applications outside these parameters, please consult us!)

Electrical			
Electrical connection	▶ with "K14" connector		EN 175301-803, 3-pole + PE
	▶ with "K35" connector		IEC 61076-2-101, M12 x 1, A-coding, 4-pole
Protection class according to DIN EN 60529	▶ with "K14" connector		IP 65 with mating connector fitted and screwed in place
	▶ with "K35" connector		IP 67 with mating connector fitted and screwed in place
Maximum switching frequency		1/h	7200
Switching accuracy (repetition accuracy)			< ± 1% of the set pressure
Switches			according to VDE 0630-1/DIN EN 61058-1
Transition resistance		mΩ	< 50
Insulation coordination			Overvoltage category 3
Contamination			Degree of contamination 3
Bounce time	▶ ON	ms	< 5
	▶ OFF	ms	< 5
			Utility model according to IEC 60947
Minimum current		mA	1.0 with 24 V DC DC-12
Maximum current	▶ with "K14" connector	A	0.5 at 50 V DC, inductive 0.2 at 125 V DC, inductive 0.1 at 250 V DC, inductive 2.0 at 250 V AC DC-22 DC-22 DC-22 AC-12
	▶ with "K35" connector	A	0.5 with 48 V DC, inductive 2.0 with 48 V DC, ohmic load DC-22 AC-12






Switching power			
Switching cycles	Voltage U in V	Ohmic load max. in A	Inductive load, max. in A
with "K14" connector			
2 million	250, AC	2 A for 2 million circuits (AC-12)	0,5 A, cos. ϕ = 0,6 for 2 mil. circuits (AC-22)
With "K14" and "K35" connectors			
2 million	24, DC	2 A for 2 million circuits (DC-12)	0.5 A for 2 million circuits ³⁾
5 million	24, DC	5.0 mA for 5 million circuits (DC-12)	–

- ¹⁾ Direction of rotation:
 – clockwise → set pressure increase
 – anti-clockwise → set pressure decrease

- ³⁾ Value does not comply with any utility category according to IEC 60947

- ²⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components. For the selection of the filters see www.boschrexroth.com/filter.


Characteristic curves: Switching pressure differential (measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)

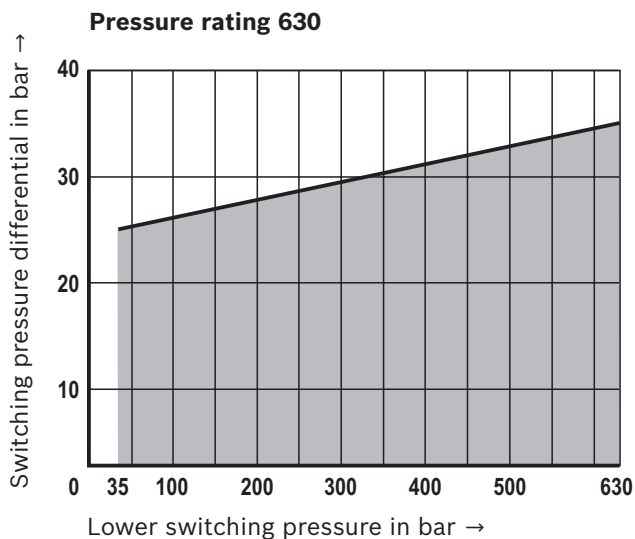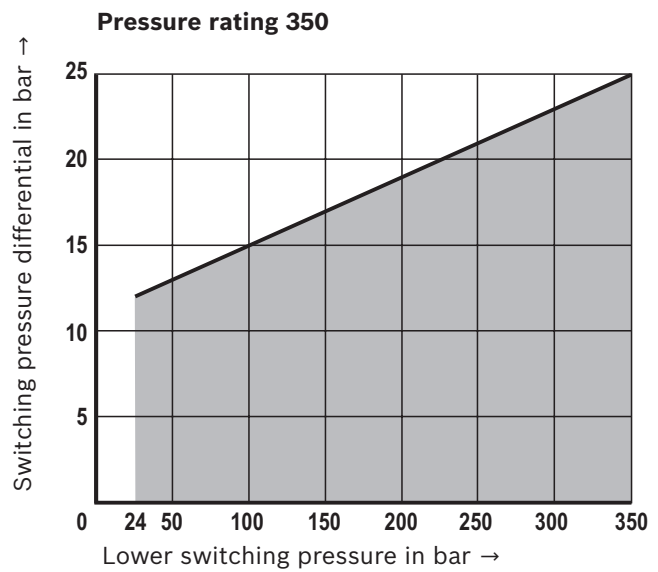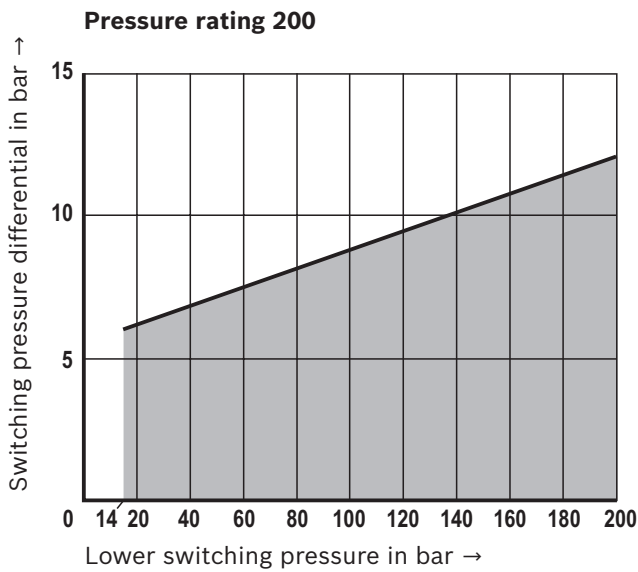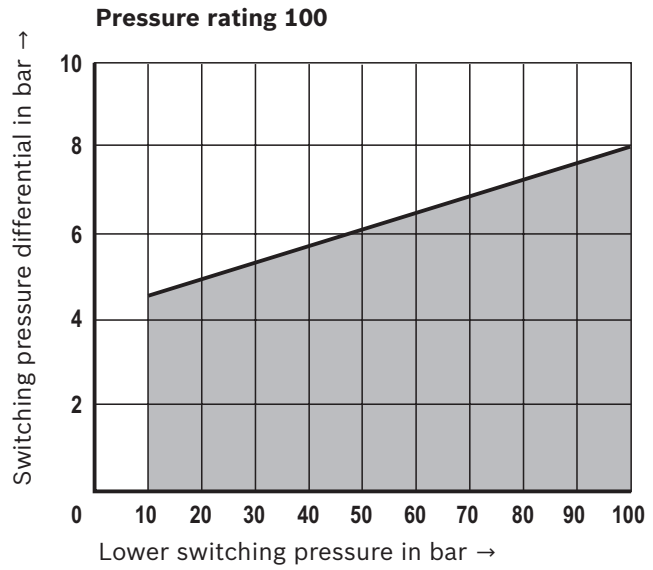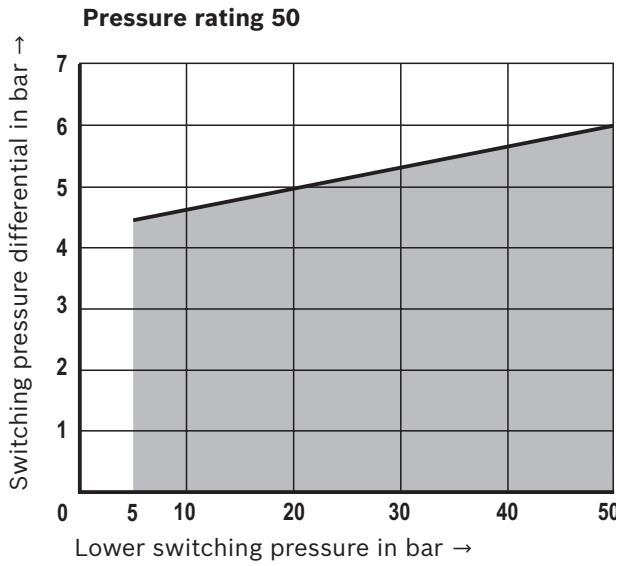


Notes:

The switching pressure differential may increase within the course of the life cycle due to the deterioration of the oil quality and the number of load cycles.


Dimensions: Type HED 8 ...K14
(dimensions in mm)

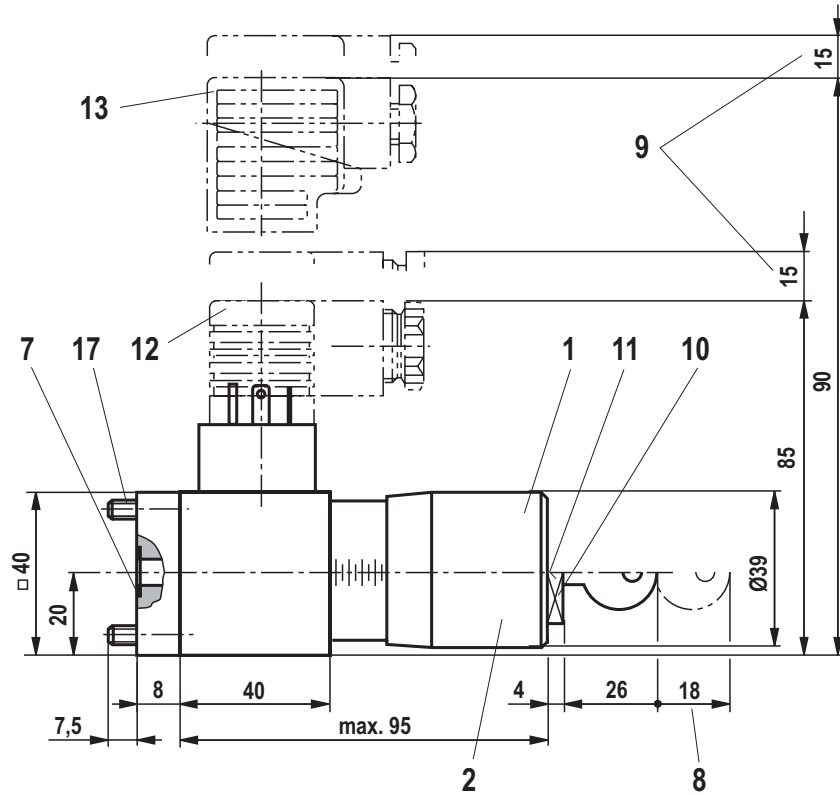


Type HED 8 OH...

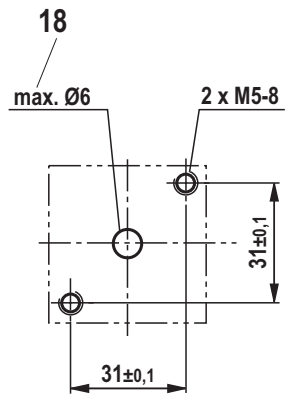


Connection dimensions

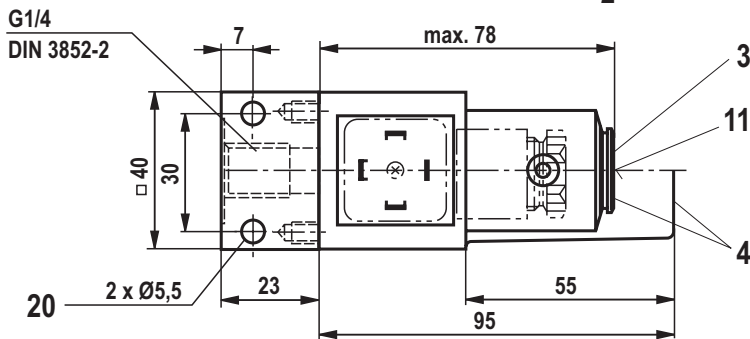

Type HED 8 OA...

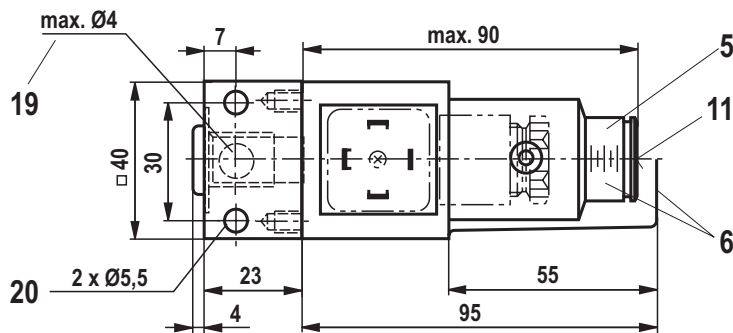




Type HED 8 OP...



Required surface quality of the device contact surface (for "OH" and "OP" designs)


For item explanations see page 9.

Dimensions: Type HED 8 ...K35
(dimensions in mm)

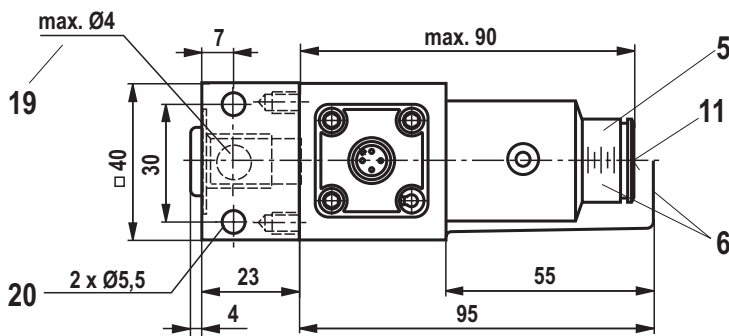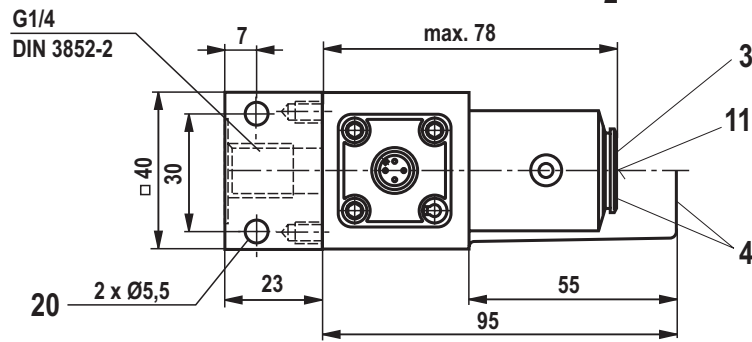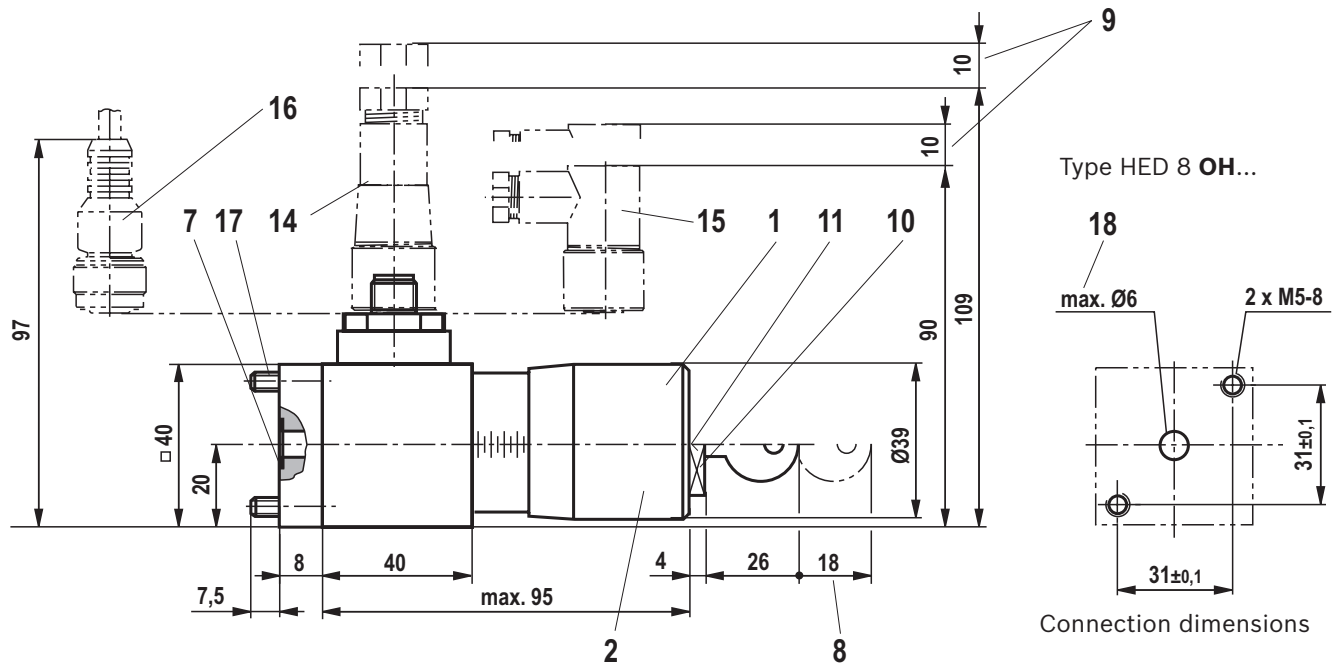

Type HED 8 OA...

Type HED 8 OP...



Required surface quality of the device contact surface (for "OH" and "OP" designs)

For item explanations see page 9.