


**SWITCHSOCKET
OUTLETS
13 AMP**

FLUSH

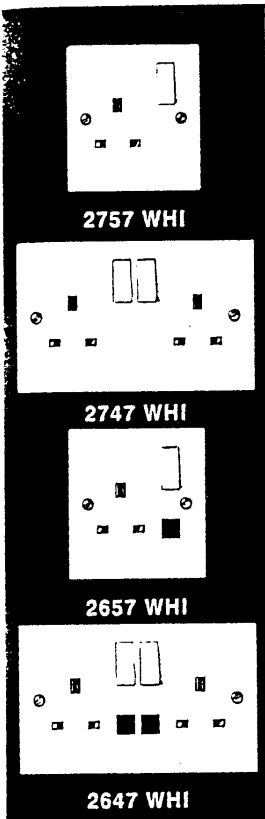

- 2757 WHI 10
1 gang
- 2747 WHI 5
2 gang
- 2657 WHI 10
1 gang with pilot lamps
- 2647 WHI 5
2 gang with pilot lamps
- 2535 WHI 10
1 gang with thick frontplate
- 2536 WHI 5
2 gang with thick frontplate

MOUNTING BOXES

Flush 25mm
1 gang: **861 ZIC**
2 gang: **862 ZIC**

Flush 35mm
(for extra wiring space)
1 gang: **866 ZIC**
2 gang: **886 ZIC**

Surface
1 gang: **2140 WHI**
2 gang: **2142 WHI**

Boxes to BS.4662


Dimensions:
1 gang 86 x 86mm;
2 gang 86 x 146mm

Fixing Centres:
1 gang 60.3mm;
2 gang 120.6mm

**RCD PROTECTED
SWITCHSOCKET
OUTLETS
13 AMP**

FLUSH

★

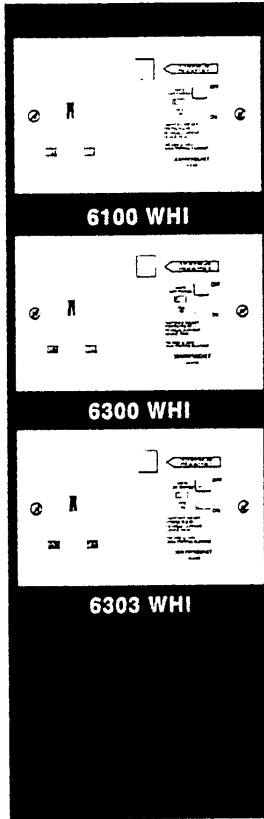

- 6100 WHI 1 ★
10mA
Active Control Circuit
- 6300 WHI 1 ★
30mA
Active Control Circuit
- 6303 WHI 1 ★
30mA
Passive Control Circuit

MOUNTING BOXES

Flush: **886 ZIC**
Surface: **2172 WHI**
Boxes to BS.4662

These products have 12.5mm thick frontplates and are only suitable for 35mm deep boxes and supply voltages of 220-240V 50Hz.


Further details regarding these products can be found on page 82

Dimensions:
86 x 146mm

Fixing Centres:
120.6mm

**SWITCHSOCKET
OUTLETS
13 AMP**

SURFACE

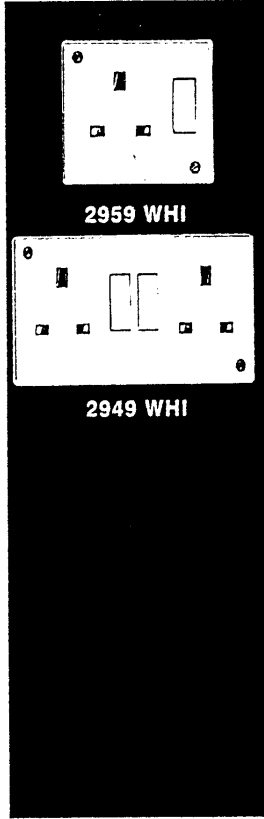

- 2959 WHI 10
1 gang
- 2949 WHI 5
2 gang


These products are supplied with a mounting box.

Mounting boxes have knockouts for cables.

Dimensions:
1 gang 74 x 64 x 46mm
2 gang 133 x 64 x 46mm
BS.1363: 1984

**SWITCHSOCKET
OUTLET
FILTERED
13 AMP**

FLUSH

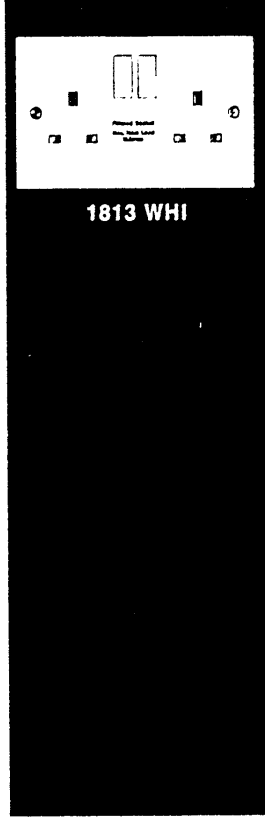

- 1813 WHI 1
2 gang

MOUNTING BOXES

Flush: **886 ZIC**
Surface: **2172 WHI**
Boxes to BS.4662

Provides two way filtering to reduce voltage spikes and radio frequency interference on the mains.

Further details regarding this product can be found in the MK Technical Supplement.


Maximum total load 13 amps.
Protected by thermal cut-out.

Dimensions:
86 x 146mm

Fixing Centres:

**SWITCHSOCKET
OUTLETS
ROUND PIN**

FLUSH

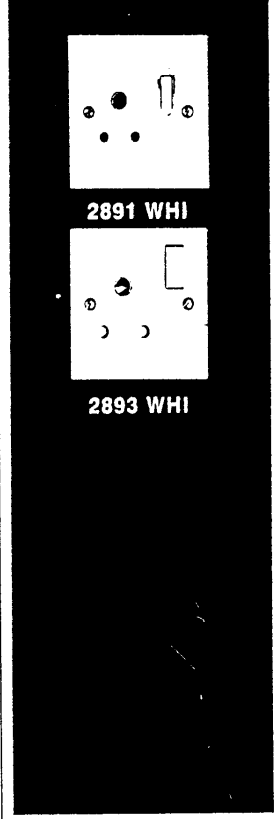

- 2891 WHI 10
5 amp SP.
Shuttered
- 2893 WHI 10
15 amp SP.
Shuttered

MOUNTING BOXES

Flush: **866 ZIC**
Surface: **2031 WHI**
Boxes to BS.4662

These products are suitable for installation in boxes to BS.4662 having a minimum depth of 35mm.

Dimensions:
86 x 86mm

Fixing Centres:
60.3mm

BS.546: 1950.