





Main

Range	TeSys
Product name	TeSys D
Product or component type	Contacteur
Device short name	LC1D
Contacteur application	Resistive load Motor control
Utilisation category	AC-4 AC-3 AC-1
Poles description	3P
Power pole contact composition	3 NO
System Voltage	<= 300 V DC 25...400 Hz power circuit <= 1000 V AC power circuit
[Ie] rated operational current	125 A (<= 140 °F (60 °C)) at <= 440 V AC AC-1 power circuit 95 A (<= 140 °F (60 °C)) at <= 440 V AC AC-3 power circuit
Motor power kW	45 kW at 660...690 V AC 50/60 Hz AC-3 45 kW at 415...440 V AC 50/60 Hz AC-3 55 kW at 500 V AC 50/60 Hz AC-3 45 kW at 1000 V AC 50/60 Hz AC-3 15 kW at 400 V AC 50/60 Hz AC-4 25 kW at 220...230 V AC 50/60 Hz AC-3 45 kW at 380...400 V AC 50/60 Hz AC-3
Motor power HP (UL / CSA)	20 hp at 200/208 V AC 50/60 Hz 3 phases motors 7.5 hp at 115 V AC 50/60 Hz 1 phase motors 15 hp at 230/240 V AC 50/60 Hz 1 phase motors 25 hp at 230/240 V AC 50/60 Hz 3 phases motors 60 hp at 460/480 V AC 50/60 Hz 3 phases motors 60 hp at 575/600 V AC 50/60 Hz 3 phases motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	220 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	Conforming to IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	125 A at <= 140 °F (60 °C) power circuit 10 A at <= 140 °F (60 °C) signalling circuit
Irms rated making capacity	1100 A at 440 V power circuit conforming to IEC 60947 140 A AC signalling circuit conforming to IEC 60947-5-1 250 A DC signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	1100 A at 440 V power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	1100 A <= 104 °F (40 °C) 1 s power circuit 135 A <= 104 °F (40 °C) 10 min power circuit 400 A <= 104 °F (40 °C) 1 min power circuit 800 A <= 104 °F (40 °C) 10 s power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	160 A gG at <= 690 V coordination type 2 power circuit 200 A gG at <= 690 V coordination type 1 power circuit 10 A gG signalling circuit conforming to IEC 60947-5-1
Average impedance	0.8 mOhm at 50 Hz - Ith 125 A power circuit

[Ui] rated insulation voltage	1000 V power circuit conforming to IEC 60947-4-1 600 V power circuit certifications CSA 600 V power circuit certifications UL 690 V signalling circuit conforming to IEC 60947-1 600 V signalling circuit certifications CSA 600 V signalling circuit certifications UL
Electrical durability	1.2 Mcycles 95 A AC-3 at $U_e \leq 440$ V 1.3 Mcycles 125 A AC-1 at $U_e \leq 440$ V
Power dissipation per pole	7.2 W AC-3 12.5 W AC-1
Safety cover	With
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	DNV GL GOST BV RINA CCC LROS (Lloyds register of shipping)
Connections - terminals	Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Power circuit: connector 1 cable(s) 0.01...0.08 in ² (4...50 mm ²) - cable stiffness: flexible - without cable end Power circuit: connector 2 cable(s) 0.01...0.04 in ² (4...25 mm ²) - cable stiffness: flexible - without cable end Power circuit: connector 1 cable(s) 0.01...0.08 in ² (4...50 mm ²) - cable stiffness: flexible - with cable end Power circuit: connector 2 cable(s) 0.01...0.02 in ² (4...16 mm ²) - cable stiffness: flexible - with cable end Power circuit: connector 1 cable(s) 0.01...0.08 in ² (4...50 mm ²) - cable stiffness: solid - without cable end Power circuit: connector 2 cable(s) 0.01...0.04 in ² (4...25 mm ²) - cable stiffness: solid - without cable end
Tightening torque	Power circuit: 79.65 lbf.in (9 N.m) - on connector - with screwdriver flat \varnothing 6 to \varnothing 8 mm Power circuit: 79.65 lbf.in (9 N.m) - on connector hexagonal 0.16 in (4 mm) Control circuit: 10.62 lbf.in (1.2 N.m) - on screw clamp terminals - with screwdriver flat \varnothing 6 mm Control circuit: 10.62 lbf.in (1.2 N.m) - on screw clamp terminals - with screwdriver Philips No 2
Operating time	20...35 ms closing 6...20 ms opening
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1

Mechanical durability	4 Mcycles
Operating rate	3600 cyc/h at ≤ 140 °F (60 °C)

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.85...1.1 Uc operational at 131 °F (55 °C), AC 60 Hz 0.3...0.6 Uc drop-out at 131 °F (55 °C), AC 50/60 Hz 0.8...1.1 Uc operational at 131 °F (55 °C), AC 50 Hz
Inrush power in VA	245 VA at 68 °F (20 °C) (cos φ 0.75) 60 Hz 245 VA at 68 °F (20 °C) (cos φ 0.75) 50 Hz
Hold-in power consumption in VA	26 VA at 68 °F (20 °C) (cos φ 0.3) 60 Hz 26 VA at 68 °F (20 °C) (cos φ 0.3) 50 Hz
Heat dissipation	6...10 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA signalling circuit
Minimum switching voltage	17 V signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm signalling circuit

Environment

IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C) at Uc
Operating altitude	9842.52 ft (3000 m) without derating
Fire resistance	1562 °F (850 °C) conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Shocks contactor open 8 Gn for 11 ms Vibrations contactor closed 3 Gn, 5...300 Hz Shocks contactor closed 10 Gn for 11 ms
Height	5 in (127 mm)
Width	3.35 in (85 mm)
Depth	5.12 in (130 mm)
Product weight	3.55 lb(US) (1.61 kg)

Ordering and shipping details

Category	22359 - CTR, TESYS D, OPEN, 80-150A AC&DC
Discount Schedule	I12
GTIN	00785901536192
Nbr. of units in pkg.	1
Package weight(Lbs)	3.4300000000000002
Returnability	N
Country of origin	CZ

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0701 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

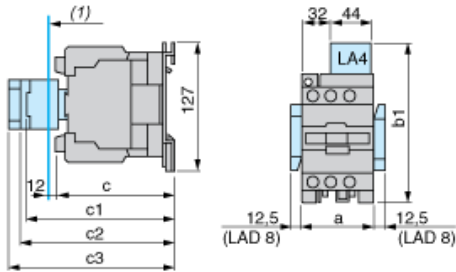

(1) Minimum electrical clearance

LC1		D80	D95
a		85	85
b1	with LA4 D•2	135	135
	with LA4 DB3 or LAD 4BB3	–	
	with LA4 DF, DT	142	
	with LA4 DM, DW, DL	150	
c	without cover or add-on blocks	125	125
	with cover, without add-on blocks	130	
c1	with LAD N (1 contact)	150	150
	with LAD N or C (2 or 4 contacts)	158	
c2	with LA6 DK10, LAD 6DK	170	170
c3	with LAD T, R, S	178	178
	with LAD T, R, S and sealing cover	182	

Wiring

