# PARTITION OF PREFABRICATED CONNECTION DEVICES >800A W650 D600

LVS04926

Price\*: 4,862.86 ZAR

viain
-------

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection cover
Accessory / separate part category	Insulation accessory
Range compatibility	Linergy Linergy BS busbar PrismaSeT PrismaSeT P framework
Cubicle partitioning form	Form 1

### Complementary

Installation description	Cubicle - width 650 mm, depth 600 mm Cubicle - width 650 mm, depth 600 + 400 mm
Number of vertical modules [50 mm]	4
Installed device	Horizontal connection for NW Horizontal connection for NT Horizontal connection for NS630b1600 Horizontal connection for NS1600b3200 Horizontal connection for INS630b2500 Horizontal connection for INV630b2500
Quantity per set	Set of 1
Width	573 mm
Net weight	2.16 kg
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)

#### **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	42.0 cm
Package 1 Length	68.0 cm

<sup>\*</sup> Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"


Package 1 Weight	2.96 kg
Unit Type of Package 2	P12
Number of Units in Package 2	40
Package 2 Height	96.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	130.0 kg


## Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes

Technical Illustration

#### **Dimensions**

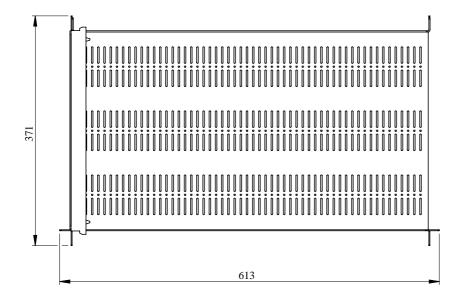

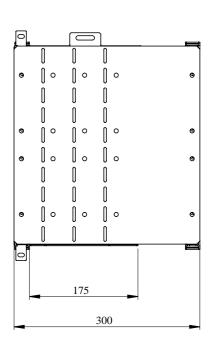

- All dimensions are approximate and are in mm. Also see technical documentation.

Recommended replacement(s)