


## Power-switching Compact General-purpose Relays



- Wiring work can be shortened by as much as 60%\* compared to conventional screw terminal sockets by combining with push-in plus terminal sockets (PYF-□-PU) that feature light insertion force and strong pull-out strength to achieve less wiring work.
- The standard models include models that are compliant with the UL, CSA, and SEV safety standards and with the Electrical Appliances and Material Safety Act.
- Equipped with an arc barrier for arc interruption.
- Withstand voltages up to 2,000 V.
- New built-in diode and built-in CR circuit models have joined the series.
- The lineup also includes models that are compliant with the LR and VDE safety standards.
- When both push-in plus terminals and screw terminal sockets are combined with plug-in terminal types (according to actual OMRON measurements as of November 2015)

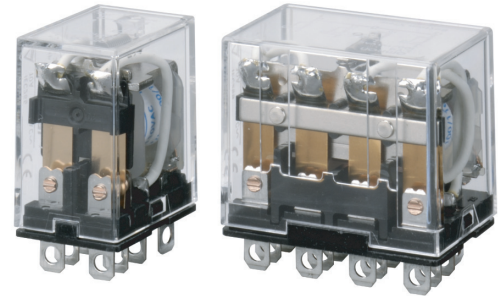

Refer to the standards certifications and compliance section of your OMRON website for the latest information on certified models.

Refer to the *Common Relay Precautions*.

## Model Number Structure

| Classification   | Structure | Relays with Plug-in Terminals |                           | Relays with PCB Terminals | Case-surface mounting |
|--|-----------|-------------------------------|---------------------------|---------------------------|-----------------------|
|  |           |                               | With operation indicators |                           |                       |
| Standard models<br>Compliance with Electrical Appliances and Material Safety Act | 1         | *LY1                          | **LY1N                    | *LY1-0                    | *LY1F                 |
|  | 2         | *LY2                          | **LY2N                    | *LY2-0                    | *LY2F                 |
|  |           | Bifurcated                    | **LY2Z                    | **LY2ZN                   | **LY2Z-0              |
|  | 3         | ---                           | ---                       | *LY3-0                    | ---                   |
| Models with diode for coil surge absorption (DC coil specification only)         | 4         | *LY4                          | **LY4N                    | *LY4-0                    | *LY4F                 |
|  | 1         | **LY1-D                       | **LY1N-D2                 | ---                       | ---                   |
|  |           | 2                             | **LY2-D                   | **LY2N-D2                 | ---                   |
| Bifurcated   | **LY2Z-D  |                               | **LY2ZN-D2                | ---                       | ---                   |
| Models with CR circuits for coil surge absorption (AC coil specification only)   | 4         | **LY4-D                       | **LY4N-D2                 | ---                       | ---                   |
|  | 1         | ---                           | ---                       | /                         | /                     |
|  |           | 2                             | **LY2-CR                  |                           |                       |
| Bifurcated   | **LY2Z-CR |                               | **LY2ZN-CR                |                           |                       |

- Note:**
1. Cells with a diagonal line cannot be manufactured. Ask your OMRON representative for details on manufacturing products for cells containing "----" in the above table.
  2. If #187 tab terminals are required, use the LY1F-T2 or LY2F-T2 (single-pole or double-pole models only).
  3. Refer to page 20 for information on plug-in terminal and socket combinations.
  4. Items with an asterisk (\*) in the table are certified for UL, CSA, and SEV. This is indicated with a certification mark on the products.
  5. Items with two asterisks (\*\*) in the table are certified for UL and CSA. This is indicated with a certification mark on the products.
  6. All models in the table are certified for IEC (TÜV).
  7. The models with plug-in terminals (single-pole, double-pole, and 4-pole) were combined with the PTF-E for the EC Declaration of Conformity. These products display the CE Marking.

Refer to *List of Certified Models* for a list of models that are certified for safety standards and the Electrical Appliances and Material Safety Act.

| Item                    | Classification | 1 pole                            |   | Double-, 3-, and 4-pole models    |   | Bifurcated contacts             |   |
|-------------------------|----------------|-----------------------------------|---|-----------------------------------|---|---------------------------------|---|
|                         |                | Resistive load                    | Inductive load<br>(cos φ = 0.4, L/R = 7 ms) | Resistive load                    | Inductive load<br>(cos φ = 0.4, L/R = 7 ms) | Resistive load                  | Inductive load<br>(cos φ = 0.4, L/R = 7 ms) |
| Contact type            |                | Single                            |   |                                   |   | Bifurcated                      |   |
| Contact materials       |                | Ag alloy                          |   |                                   |   |                                 |   |
| Rated load              |                | 15 A at 110 VAC<br>15 A at 24 VDC | 10 A at 110 VAC<br>7 A at 24 VDC            | 10 A at 110 VAC<br>10 A at 24 VDC | 7.5 A at 110 VAC<br>5 A at 24 VDC           | 5 A at 110 VAC<br>5 A at 24 VDC | 4 A at 110 VAC<br>4 A at 24 VDC             |
| Rated carry current     |                | 15 A                              |   | 10 A                              |   | 7 A                             |   |
| Maximum contact voltage |                | 250 VAC<br>125 VDC                |   | 250 VAC<br>125 VDC                |   | 250 VAC<br>125 VDC              |   |
| Maximum contact current |                | 15 A                              | 15 A  | 10 A                              | 10 A  | 7 A                             | 7 A   |

| Item                          | Type | Single-pole and double-pole models<br>(standard models and bifurcated contact models) | Single-pole, double-pole models<br>(models with built-in operation indicators, models with built-in diodes, and models with built-in CR circuits),<br>3-pole and 4-pole models |
|-------------------------------|------|---|--|
| Ambient operating temperature |      | -25 to 55°C<br>(with no icing or condensation)*1                                      | -25 to +40°C<br>(with no icing or condensation)*2  |
| Ambient operating humidity    |      | 5% to 85%   |  |

- Note:**
- Some models in the LY1 and LY2 Series have an upper temperature limit of +40°C. This limitation is due to the diode junction temperature and the elements used. Refer to *Ambient Temperature vs. Coil Temperature Rise* in *Engineering Data* on page 8 to 9 for information on operation in temperature conditions that are not described here.
  - When you apply a minimum of 10 A of current to an LY1 when it is used in combination with the PTF-08-PU, PTF-08-PU-L, PTF08A, PTF08A-E, or PT08, connect each of the following terminal pairs: (1) to (2), (3) to (4), and (5) to (6).
  - If the carry current is 4 A or less, the usable ambient temperature range is -25 to 70° C.
  - If the flowing current is 4 A or less, the usable ambient temperature range is -25 to 55° C.

### Characteristics


| Item                                     | Type                                   | Standard models, models with built-in operation indicators, models with built-in CR circuits, and models with built-in diodes       | Bifurcated contacts  |
|--|--|---|--|
| Contact resistance*1                     |  | 50 mΩ max.  |  |
| Operating time*2                         |  | 25 ms max.  |  |
| Release time*2                           |  | 25 ms max.  |  |
| Maximum operating frequency              | Mechanical                             | 18,000 operations/h   |  |
|  | Rated load                             | 1,800 operations/h  |  |
| Insulation resistance*3                  |  | 100 MΩ min.   |  |
| Dielectric strength                      | Between coil and contacts              | 2,000 VAC at 50/60 Hz for 1 min.  |  |
|  | Between contacts of different polarity | 1,000 VAC at 50/60 Hz for 1 min.  |  |
|  | Between contacts of the same polarity  | 1,000 VAC at 50/60 Hz for 1 min.  |  |
| Vibration resistance                     | Destruction                            | 10 to 55 to 10 Hz, 0.5-mm single amplitude (1.0-mm double amplitude)  |  |
|  | Malfunction                            | 10 to 55 to 10 Hz, 0.5-mm single amplitude (1.0-mm double amplitude)  |  |
| Shock resistance                         | Destruction                            | 1,000 m/s <sup>2</sup>  |  |
|  | Malfunction                            | 200 m/s <sup>2</sup>  |  |
| Endurance                                | Mechanical                             | AC: 50,000,000 operations min.<br>DC: 100,000,000 operations min.   | (switching frequency: 18,000 operations/h)   |
|  | Electrical*4                           | 1-, 3-, 4-pole: 200,000 operations min.<br>2-pole: 500,000 operations min.<br>(rated load, operating frequency: 1,800 operations/h) | 2-pole: 500,000 operations min.<br>(rated load, operating frequency: 1,800 operations/h) |
| Failure rate P value (reference value)*5 |  | 100 mA at 5 VDC   | 10mA at 5 VDC  |
| Weight                                   |  | 1-pole and 2-pole: 40 g, 3-pole: Approx. 50 g, 4-pole: Approx. 70 g   |  |

- Note:** The values at the left are initial values.
- Measurement conditions: 1 A at 5 VDC using the voltage drop method
  - Measurement conditions: With rated operating power applied, not including contact bounce. Ambient temperature condition: 23° C
  - Measurement conditions: For 500 VDC applied to the same location as for dielectric strength measurement.
  - Ambient temperature condition: 23° C
  - This value was measured at a switching frequency of 120 operations per minute.

### Endurance Under Real Loads (Reference Only)


| Item                 | LY1, 100 VAC   |                              |   | LY2, 100 VAC   |                              |   | LY4, 100 VAC  |                              |   |
|----------------------|--|------------------------------|---|--|------------------------------|---|---|------------------------------|---|
|                      | Conditions   | Operating frequency          | Electrical life (x10,000 operations min.) | Conditions   | Operating frequency          | Electrical life (x10,000 operations min.) | Conditions  | Operating frequency          | Electrical life (x10,000 operations min.) |
| AC motor             | 400 W, 100 VAC single-phase with 35-A inrush current, 7-A current flow | ON for 10 s,<br>OFF for 50 s | 5   | 200 W, 100 VAC single-phase with 25-A inrush current, 5-A current flow | ON for 10 s,<br>OFF for 50 s | 20  | 200 W, 200 VAC three-phase with 5-A inrush current, 1-A current flow    | ON for 10 s,<br>OFF for 50 s | 50  |
|                      |  |                              |   |  |                              |   | 750 W, 200 VAC three-phase with 18-A inrush current, 3.5-A current flow |                              | 7   |
| AC lamp              | 300 W, 100 VAC with 51-A inrush current, 3-A current flow              | ON for 5 s,<br>OFF for 55 s  | 10  | 300 W, 100 VAC with 51-A inrush current, 3-A current flow              | ON for 5 s,<br>OFF for 55 s  | 8   | 300 W, 100 VAC with 51-A inrush current, 3-A current flow               | ON for 5 s,<br>OFF for 55 s  | 5   |
|                      | 500 W, 100 VAC with 78-A inrush current, 5-A current flow              |                              | 2.5                                       |  |                              |   |   |                              |   |
| Capacitor (2,000 μF) | 24 VDC with 50-A inrush current, 1-A current flow                      | ON for 1 s,<br>OFF for 6 s   | 10  | 24 VDC with 50-A inrush current, 1-A current flow                      | ON for 1 s,<br>OFF for 15 s  | 1   | 24 VDC with 50-A inrush current, 1-A current flow                       | ON for 1 s,<br>OFF for 15 s  | 0.5                                       |
|                      |  |                              |   | 24 VDC with 20-A inrush current, 1-A current flow                      |                              | 15  | 24 VDC with 20-A inrush current, 1-A current flow                       |                              | 20  |
| AC solenoid          | 50 VA with 2.5-A inrush current, 0.25-A current flow                   | ON for 1 s,<br>OFF for 2 s   | 150                                       | 50 VA with 2.5-A inrush current, 0.25-A current flow                   | ON for 1 s,<br>OFF for 2 s   | 100                                       | 50 VA with 2.5-A inrush current, 0.25-A current flow                    | ON for 1 s,<br>OFF for 2 s   | 100                                       |
|                      | 100 VA with 5-A inrush current, 0.5-A current flow                     |                              | 80  | 100 VA with 5-A inrush current, 0.5-A current flow                     |                              | 50  | 100 VA with 5-A inrush current, 0.5-A current flow                      |                              | 50  |

**LY4  
LY4N  
LY4-D  
LY4N-D2**

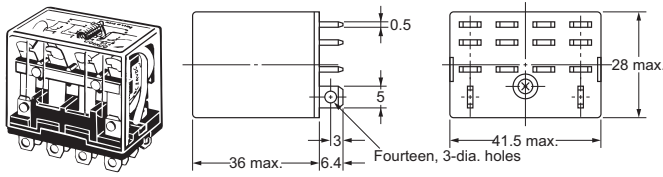


**Terminal Arrangement/Internal Connections (Bottom View)**

**LY4**




(The coil has no polarity.)


**LY4-D**



Check the coil polarity when wiring and wire all connections correctly.

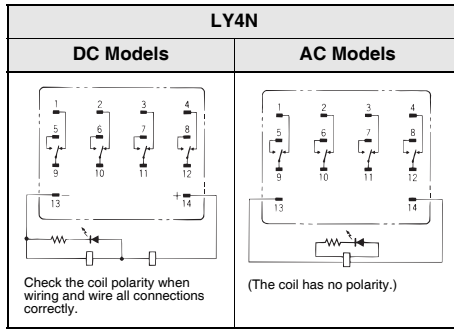


**LY4N-D2**



Check the coil polarity when wiring and wire all connections correctly.

- Note:**
1. For the DC models, check the coil polarity when wiring and wire all connections correctly.
  2. The indicator is red for AC and green for DC.
  3. The operation indicator indicates the energization of the coil and does not represent contact operation.


**LY2-CR  
LY2Z-CR  
LY2N-CR  
LY2ZN-CR**

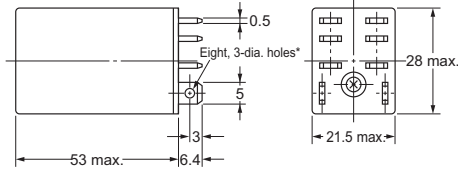

\*These dimensions are for the LY2N-CR.


**Terminal Arrangement/Internal Connections (Bottom View)**

**LY2(Z)-CR**





(The coil has no polarity.)

**LY2(Z)N-CR**




**Relays with PCB Terminals**

**LY1-0, LY3-0,  
LY2-0, and LY4-0**

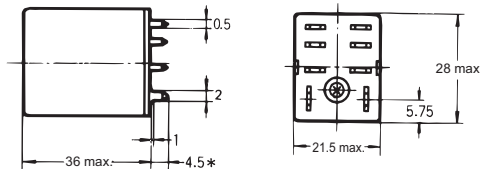


**PCB Processing Dimensions (Bottom View)**

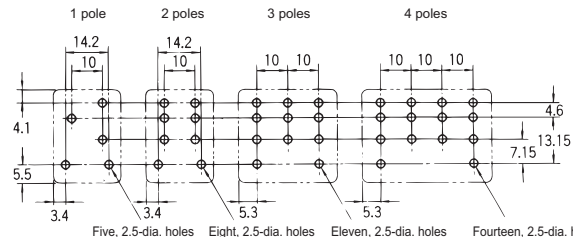


- Note:**
1. The dimensional tolerance is 0.1 mm.
  2. There are exposed parts (conductive parts) on the LY1-0 other than the terminals. Be careful when using this Relay on a double-sided PCBs.

**Terminal Arrangement/Internal Connections (Bottom View)**


**LY1-0**




**LY2-0**



**LY3-0**



**LY4-0**



(The coil has no polarity.)

**Note:** The figures and dimensions depicted here are for the LY2-0. The dimension with an asterisk (\*) is 6.4 for the LY1-0.