



### MA30EUM

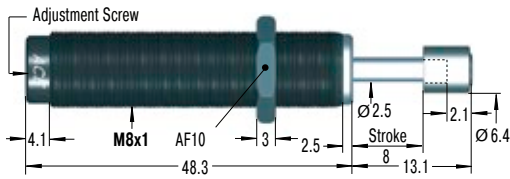


### RF8

Rectangular Flange




### MB8SC2

Mounting Block




### MA50EUM

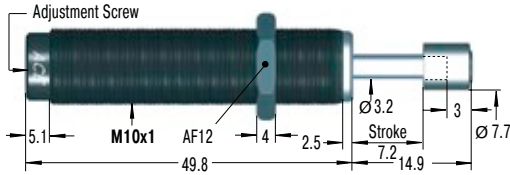


### RF10

Rectangular Flange




### MB10SC2

Mounting Block




### MA35EUM

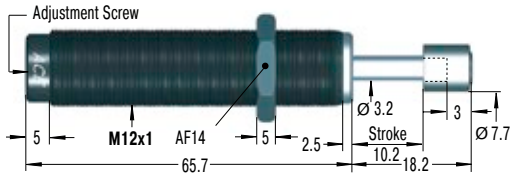


### RF12

Rectangular Flange




### MB12

Clamp Mount




### MA150EUM

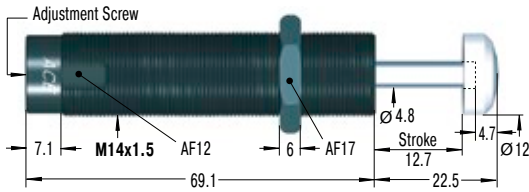

M14x1 also available to special order


### RF14

Rectangular Flange




### MB14

Clamp Mount




### MA225EUM

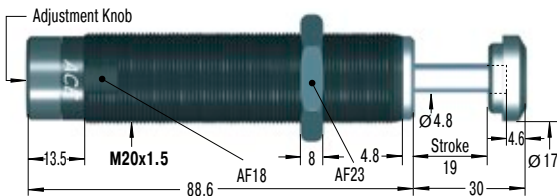


### RF20

Rectangular Flange




### MB20

Clamp Mount




### MA600EUM

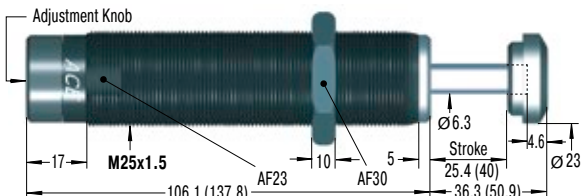

Dimensions for MA900EUM in ( ). MA600EUM with M27x3 available to special order


### RF25

Rectangular Flange



### MB25

Clamp Mount



Additional accessories, mounting, installation ... see from page 36.

### Performance

TYPES	Max. Energy Capacity		Effective Weight		Return force min. N	Return force max. N	Return time s	Side Load Angle max. °	Weight kg
	W <sub>3</sub> Nm/cycle	W <sub>4</sub> Nm/h	me min. kg	me max. kg					
MA30EUM	3.5	5,650	0.23	15	1.7	5.3	0.3	2.0	0.013
MA50EUM	5.5	13,550	4.50	20	3.0	6.0	0.3	2.0	0.025
MA35EUM	4.0	6,000	6.00	57	5.0	11.0	0.2	2.0	0.043
MA150EUM	22.0	35,000	1.00	109	3.0	5.0	0.4	2.0	0.060
MA225EUM	25.0	45,000	2.30	226	5.0	10.0	0.1	2.0	0.130
MA600EUM	68.0	68,000	9.00	1,360	10.0	30.0	0.2	2.0	0.310
MA900EUM	100.0	90,000	14.00	2,040	10.0	35.0	0.4	1.0	0,400

<sup>1</sup> For applications with higher side load angles consider using the side load adaptor (BV) pages 38 to 45.