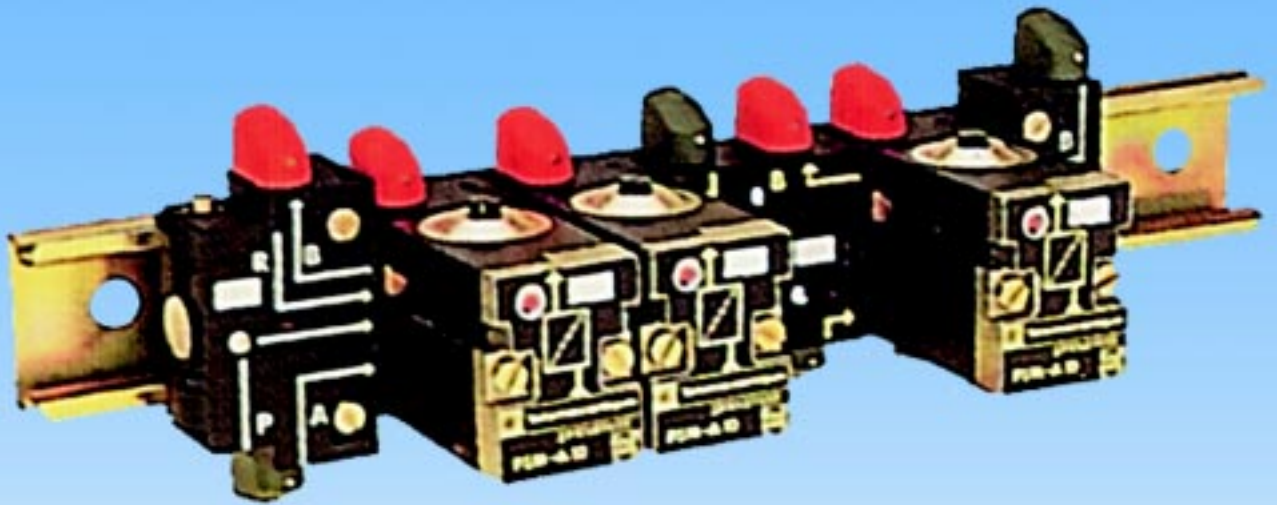










Logic Processing

*Modular sequencer, inline/modular
logic elements, bus mounted elements,
relays, electrical operators,
impulse-counters, timers*

Catalogue No.: PDOC 00029UK01ev








Subbase mounted elements

Type	Symbol	Logic function	Description	Connection*	Weight Kg	Order code	D
For subbase PZU**							
		YES regenerate	With visual indication of pneumatic input/output signal		0,03	PLJ-C10	1
3-port subbases**							
			With common input	Ø4 mm Swivel push-in	0,04	PZU-A12	1
			Cascade	Ø4 mm Swivel push-in	0,05	PZU-C12	1
4-port subbases**							
			For combination with memory relay (see page 3-5) and amplifier relay (see page 3-5)	Ø4 mm Swivel push-in	0,05	PZU-B12	1
Input module							
				Ø4 mm Swivel push-in	0,05	PZU-E12	1

* For other type of connections contact Technical Sales Department

** Can be used singly or in combination. Mounting methods: On DIN rail with built in clip, on surface mounting using screws M4x25

Main data for time delay relays

Type	Function	Timing range	Connection *	Weight Kg	Order code	D	
Complete with Subbase PZU-A12							
		Output after timed period	0,1 to 30 s	Ø4 mm Swivel push-in	0,17	PRT-A12	
Without subbase							
For subbase PZU-A12 or PZU-C12							
		Output after	0,1 to 3 s	0,1 to 30 s	0,13	PRT-E10	
		timed period			0,13	PRT-A10	
		Output during	0,1 to 3 s	0,13	PRT-F10	1	
		timed period **	0,1 to 30 s	0,13	PRT-C10	1	
		10 to 180 s	0,13	PRT-D10	1		
Tamper proof cap					0,01	LA9-D901	3

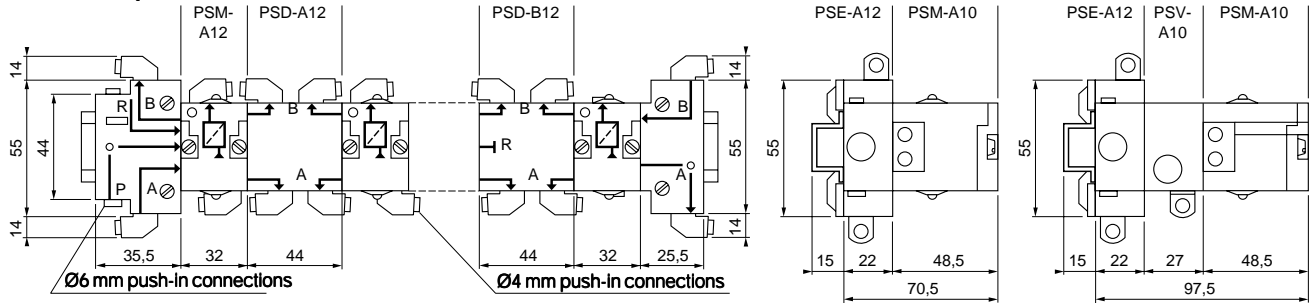
* For other type of connections contact Technical Sales Department

** Can be used to provide an impulse generator

Logic Processing


Dimensions, Logic processing

Modular sequencer




Line mounted logic elements

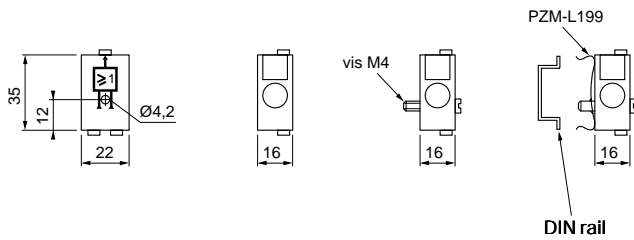PLL-A11 and PLK-A11



Combinable logic elements

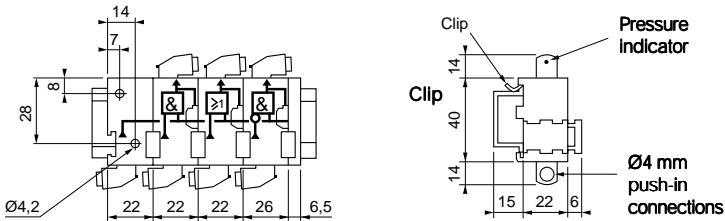PLE-B12 — PLL-B12 — PLK-B12 and PLN-B12



Logic elements mounted on 3-port modular subbases

PZU-E12

PLJ-C10 — PLN-C10 — PLK-C10 and PLL-C10 mounted on PZU-C12 and PZU-A12

