



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanTG.com | artisanTG.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pilz PNOZ 3 24VDC 5S 1O 1W* at our website: [Click HERE](#)

Category 3, EN 954-1 PNOZ 3

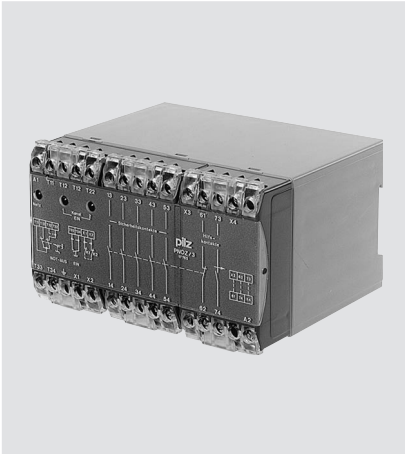

Emergency stop relay and safety gate monitor in accordance with VDE 0113-1, 11/98, EN 60204-1, 12/97 and IEC 204-1, 11/98.

Features

- Single-channel or dual-channel without the detection of shorts across the input contacts
- 1 N/O auxiliary contact is a fleeting contact

Approvals

	PNOZ 3
	●
	●
	●

Technical Details	PNOZ 3
Electrical Data	
Supply Voltage	AC: 24, 42, 48, 110, 115, 120, 230, 240 V DC: 24 V
Tolerance	85 ... 110 %
Power Consumption	Approx. 4.5 W/9 VA
Voltage and Current at the Input and Reset Circuits and Feedback Control Loop	24 VDC, 50 mA
Switching Capability in accordance with EN 60947-4-1, 01/00	AC1: 240 V/8 A/2000 VA, 400 V/5 A/2000VA DC1: 24 V/8 A/200 W
EN 60947-5-1, 08/00 (DC13: 6 cycles/min.)	AC15: 230 V/5 A; DC13: 24 V/7 A
Output Contacts	5 safety contacts (N/O) 1 auxiliary contact (N/C) 1 fleeting auxiliary contact (N/O)
Contact Fuse Protection EN 60947-5-1, 08/00	10 A quick or 6 A slow
Times	
Delay-on Energisation	Approx. 250 ms
Delay-on De-energisation	Max. 50 ms
Fleeting Contact 73-74	Approx. 150 ms
Simultaneity channel1/2	Approx. 150 ms or ∞
Max. Supply Interruption before De-energisation	Approx. 10 ms
Mechanical Data	
Torque Setting on Connection Terminals	1.2 Nm (screws)
Max. Cross Section of External Conductors	2 x 2.5 mm ² Single-core or multi-core with crimp connectors
Dimensions (H x W x D)	75 x 135 x 111.5 mm
Weight	830 g

Description


- 135 mm, P-75 housing, DIN Rail mounting
- Positive-guided relay outputs:
 - 5 safety contacts (N/O)
 - 1 auxiliary contact (N/C)
 - 1 fleeting auxiliary contact (N/O)
- Connections for
 - E-STOP button
 - safety gate limit switch
 - reset button
- LEDs for channel 1/2 and power
- Increase in the number of safety contacts available by connecting expander modules.

Operating Modes


- Single-channel operation
- Dual-channel operation
- Automatic reset
- Manual reset

Category 3, EN 954-1 PNOZ 3

Internal Wiring Diagram

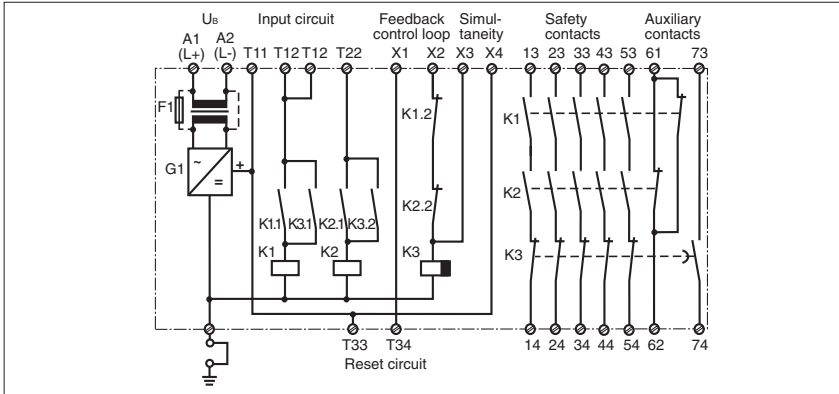


- Increase in safety contacts
The number of output contacts can be increased by using expander modules or relays/contactors with positive-guided contacts.

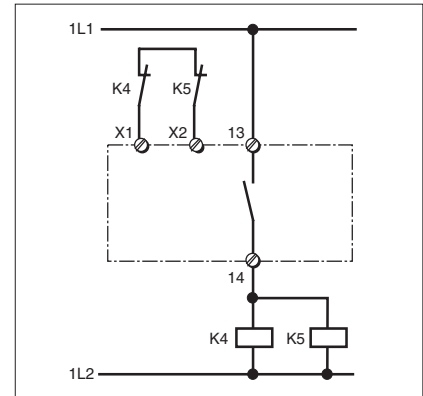


External Wiring


- Example 1
Single-channel E-STOP wiring with manual reset.

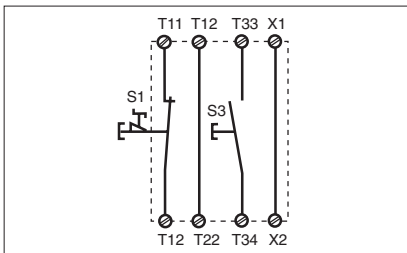

- Example 4
Time difference extended to infinity on a safety gate control with manual reset.

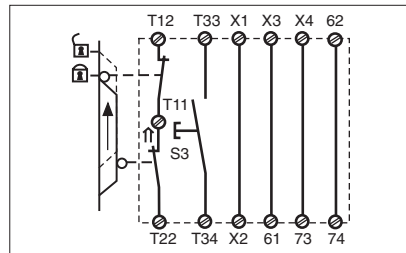

- Example 2
Dual-channel E-STOP wiring with manual reset.

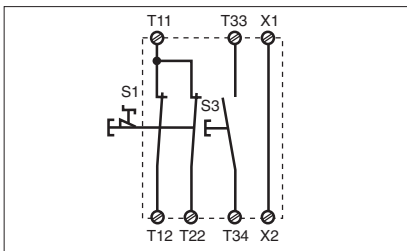

– Key

S1/2: E-STOP or safety gate switch


S3: Reset button

↑ Switch operated

⬇ Gate open

⬆ Gate closed

- Example 3
Single-channel safety gate control with automatic reset while simultaneity is maintained.

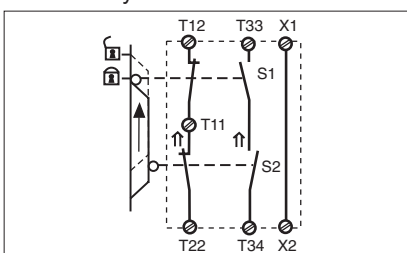

Category 3, EN 954-1 PNOZ 3

General Technical Data

Unless stated otherwise in the technical details for the specific unit

Electrical Data

Frequency Range AC	50 ... 60 Hz
Residual Ripple DC	160 %
Contact Material	AgSnO ₂
Continuous Duty	100 %

Environmental Data

EMC	EN 50081-1, 01/92, EN 61000-6-2, 03/00
Vibration in accordance with EN 60068-2-6, 01/00	Frequency: 10 ... 55 Hz, Amplitude: 0.35 mm
Climatic Suitability	DIN IEC 60068-2-3, 12/86
Airgap Creepage	DIN VDE 0110 part 1, 04/97
Ambient Temperature	-10 ... +55 °C
Storage Temperature	-40 ... +85 °C

Mechanical Data

Torque Setting on Connection Terminals	0,6 Nm (screws)
Mounting Position	Any
Housing Material	Thermoplast Noryl SE 100
Protection	Mounting: IP 54 Housing: IP 40 Terminal Range: IP 20

The units were tested in accordance with the relevant standards current at the time of development.

Order References

Type	U _B	Order No.
PNOZ 3	24 V DC	474 894
PNOZ 3	24 V AC	474 803
PNOZ 3	42 V AC	474 813
PNOZ 3	48 V AC	474 823
PNOZ 3	110 V AC	474 833
PNOZ 3	115 V AC	474 837
PNOZ 3	120 V AC	474 843
PNOZ 3	230 V AC	474 856
PNOZ 3	240 V AC	474 859

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisanng.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | artisanng.com

