


5 mm slot width

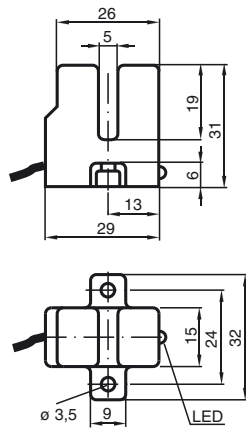

| General specifications | |
|-----------------------------------|------------------------------------|
| Switching element function | PNP Make function |
| Slot width | 5 mm |
| Depth of immersion (lateral) | 8 ... 10 typ. |
| Installation | |
| Nominal ratings | |
| Operating voltage U_B | 10 ... 30 V |
| Switching frequency f | 0 ... 1500 Hz |
| Reverse polarity protection | Protected against reverse polarity |
| Short-circuit protection | pulsing |
| Voltage drop U_d | ≤ 3 V |
| Operating current I_L | 0 ... 100 mA |
| No-load supply current I_0 | ≤ 15 mA |
| Indication of the switching state | LED, yellow |
| Standard conformity | |
| EMC in accordance with | EN 60947-5-2 |
| Ambient conditions | |
| Ambient temperature | -25 ... 70 °C (248 ... 343 K) |
| Mechanical specifications | |
| Connection type | 12 m, PVC cable |
| Core cross-section | 3 x 0.34 |
| Housing material | PBT |
| Protection degree | IP67 |

Connection type:

E2

