


Red Spot centre bolted tags fuse links

TMF

Time current curve

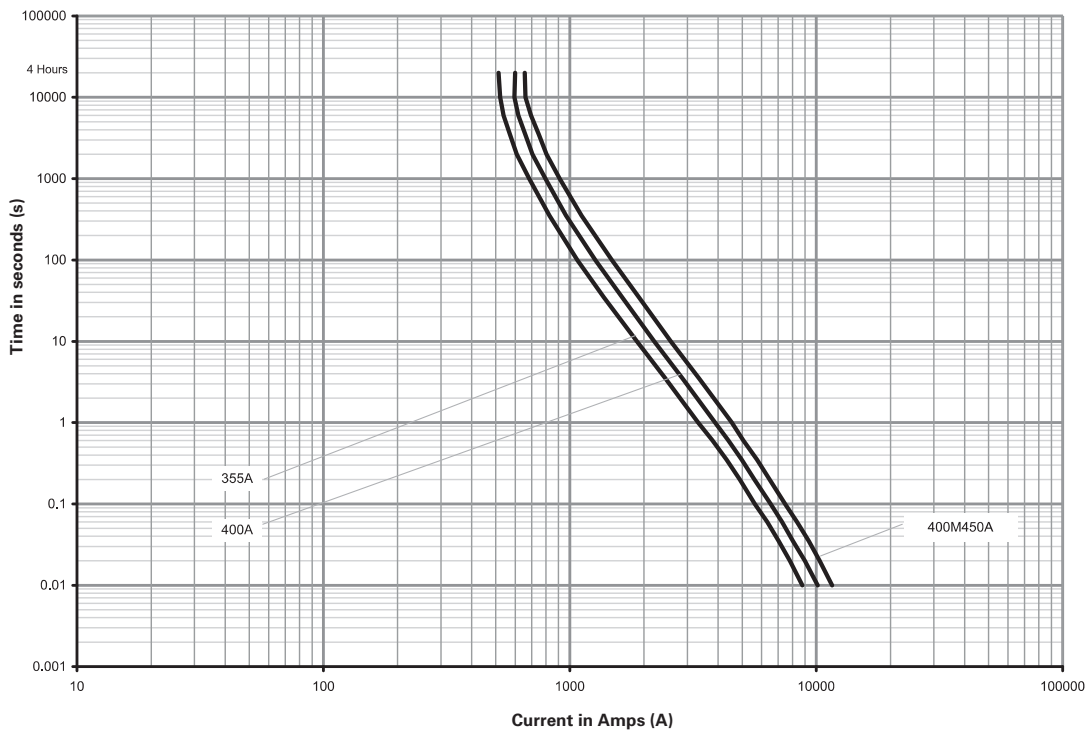

TM

Catalogue numbers	Rated voltage	Rated current (Amps)	BS reference	Breaking capacity	Operating class	I^2t (A ² s) x 10 ³		Fixing centre (mm)	Pack quantity	Alternative fuse links	Compatible fuse holders
						Pre-arcing	Total at rated voltage				
TM355	660-690 V a.c./ 460 V d.c.	355	C1	80 kA	gG	500	2250	133/184	1	P11/660	RS400
TM400		400		80 kA	gG	640	3000			EF at 415 V a.c.	
TM400M450		400M450		80 kA	gM	800	3800				

Dimensions - mm

