


- PNP
- Normally open (NO)
- 2.00 mm
- Flush (shielded)
- Connector, M08x1-S49



**General attributes**

Approvals / Conformity	CE cULus IEC 60947-5-2 IP68 according to BWN PR 20
Basic standard	Yes
Enclosure Type per IEC 60529	■ ■
Function indicator	Yes
Operating distance marking	Yes
Polarity reversal protected	No
Power indicator	II
Protection Class	Yes
Short circuit protected	

**Electrical attributes**

Connection type	Connector
Eff. operating current I <sub>e</sub>	200 mA
Eff. operating voltage U <sub>e</sub> DC	24.0 V
Electrical version	DC, direct current
Load capacitance max. (at U <sub>e</sub> )	0.500 µF
Max. no-load cur. I <sub>o</sub> undamped	3.0 mA
Minimum operating current I <sub>m</sub>	0 mA
No-load current I <sub>o</sub> damped max.	9.0 mA
Operating voltage U <sub>B</sub> max. DC [V]	30.0 V
Operating voltage U <sub>B</sub> min. DC [V]	10.0 V
Rated insulation voltage U <sub>i</sub>	250 VAC
Rated short circuit current	100 A


Ripple max. (% of U <sub>e</sub> )	15 %
Switching freq. f max. (at U <sub>e</sub> )	1500 Hz
Switching function	Normally open (NO)
Switching output	PNP
Voltage drop static max.	2.5 V

**Mechanical attributes**

Ambient temperature T <sub>a</sub> max.	70 °C
Ambient temperature T <sub>a</sub> min.	-25 °C
Assured operating distance S <sub>a</sub>	1.60 mm
Connector type	M08x1-S49
Depth	45.0 mm
Diameter d1	M08x1
Eff. operating distance S <sub>r</sub>	2.00 mm
Housing material	Stainless steel
Mech. installation condition	Flush (shielded)
Mounting length	34.1 mm
Rated operating distance S <sub>n</sub> [mm]	2.00 mm
Sensing face material	PBT
Tightening torque	8 Nm

**Additional text**

Embeddable: See installation notes for inductive sensors with extended switching distance 825357.  
The sensor is functional again after the overload has been eliminated.

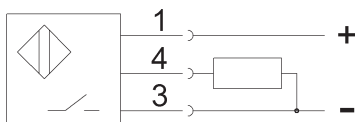

Inductive sensor

**BES 516-324-G-E5-C-S49**  
**BES00P7**

**BALLUFF**  
*sensors worldwide*

