


KF5001



Capacitive sensor

KFA3040BBPKG/NI/US

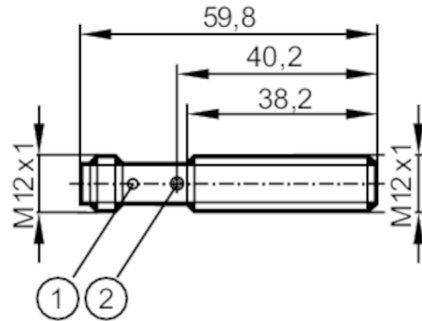

- 1 LED 4 x 90°
- 2 potentiometer



Product characteristics

Electrical design		PNP
Output function		normally open
Sensing range	[mm]	1...6
Housing		threaded type
Dimensions	[mm]	M12 x 1 / L = 60

Application

Media		dry bulk material; liquids
-------	--	----------------------------

Electrical data

Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 12
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	50
Short-circuit proof		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	1...6
Sensing range adjustable		yes
Factory setting sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %

KF5001



Capacitive sensor

KFA3040BBPKG/NI/US

Accuracy / deviations		
Correction factor		glass: 0.6 / water: 1 / ceramics: 0.5 / PVC: 0.4
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-20...20
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 65
Increased immunity		yes
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	636
Mechanical data		
Weight	[g]	39.3
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M12 x 1 / L = 60
Thread designation		M12 x 1
Materials		stainless steel (1.4404 / 316L); PEEK
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M12		

KF5001



Capacitive sensor

KFA3040BBPKG/NI/US

Connection

