

Metasol Contactor

MC-50a



General

Product code	1338016500
Product description	MC-50a AC240V 60Hz SCREW 2a2b (Metasol) EXP (MC50A-30-22-U6-S-E)
Main contact	3NO
Auxiliary contact	2NO 2NC
Control voltage	AC240V 60Hz
Type of terminal	Screw
Local/Export	Export
Standards	IEC 60947-4-1, IEC 60947-5-1, UL508
Certificates	CE, UL, CCC
	KR, LR, BV, DNV, ABS, NK, RINA

Characteristics

Number of poles	3P
Rated operational voltage [Ue]	1000V
Rated insulation voltage [Ui]	1000V
Rated withstand voltage [Uimp]	8kV
Rated frequency [Hz]	60Hz
Maximum operating rate in operating cycles per hour(AC3)	1200

Mechanical durability (mil. operations)	12
Electrical durability (mil. operations)	2
Rated operational current (AC-1)	100A
Power (AC-1)	-
	-
	-
	-
Current (AC-1)	-
	-
	-
	-
Motor power (AC-3)	15kW at 200/240V
	22kW at 380/440V
	30kW at 500/550V
	30kW at 690V
	30kW at 1000V
Motor power (AC-4)	7.5kW at 200/240V
	15kW at 380/440V
Rated operational current (AC-3)	55A at 200/240V
	50A at 380/440V
	43A at 500/550V
	28A at 690V
	23A at 690V
Rated operational current (AC-4)	35A at 200/240V
	32A at 380/440V
Rated operational current (DC-3,5)	-
	-
	-

	-
Rated operational current (DC-1)	-
Type 2 Coordination	See the Type 2 Coordination Table in the catalog
Motor power (UL/CSA)	3hp at 110~220V for 1 phase motors
	10hp at 220~240V for 1 phase motors
	20hp at 200~208V for 3 phase motors
	25hp at 220~240V for 3 phase motors
	40hp at 440~480V for 3 phase motors
	50hp at 550~600V for 3 phase motors
NEMA size	-
Rated Short-time withstand current	1000A at 1s
	550A at 10s
	330A at 30s
	250A at 1min
	150A at 3min
	90A at 10min
	87A at =15min
Conductor size (AWG)	10~4
Conductor size (mm ²)	6~25
The max. number of conductor	6~25
Conductor type	Solid, Stranded
Conductor characteristic	65/75? Cu-wire only
Main terminal size	M5
Crimp terminal (mm)	M5
Torque (lb-in)	M5
Torque (Nm)	M5
Torque (kgf.cm)	M5


Environment

Degree of protection	IP20
Ambient air temperature	-30? ~ +65? at storage
	-5? ~ +55? at operation (AC type)
Operating altitude	3000m(8900ft)
Shock resistance (1/2 sin wave=11ms)	8G at opened
	10G at closed
Vibration resistance (Conforming to IEC68-2-6) (5~300Hz)	2G at opened
	4G at closed
Flame resistance	V0 at conforming to UL94
	960? at conforming to IEC695-2-1
REACH	Yes
RoHS	Yes
WEEE	Yes

Dimensions

Weight	1kg
Size width	79mm / 3.11inch
Size height	106mm / 4.17inch
Size depth	119mm / 4.69inch

MC-50a~65a AC

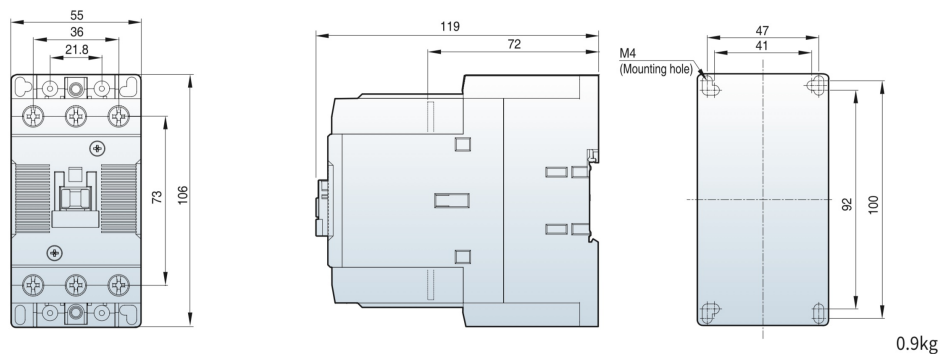

Control coil

Control voltage	AC240V 60Hz
Control voltage limit [Uc]	85~110%
Consumption at 20°C	110VA at inrush

Consumption at 20°C	13VA at holding
Heat dissipation	2.8W at holding
Operating time	15~30ms at closing
Operating time	4~19ms at opening

Applicable Accessories

LS[➤]ELECTRIC

Accessories

