

## M12 Field Attachable Connectors (DUO)


RSC...DUO | RKC...DUO



### Male, 4- and 5-Pole


Field attachable connector, M12 Duo male connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.

RSC...DUO

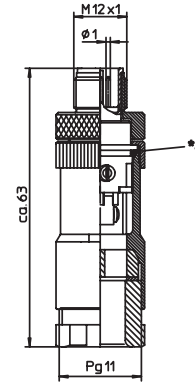

\*a O-Ring

RKC...DUO



\*a O-Ring




### Female, 4- and 5-Pole

Field attachable connector, M12 Duo female connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.


## Pin Assignments

Face Views / M12, Male / Female

4 pole



5 pole





Be Certain with Belden

**M12 Field Attachable Connectors (DUO)**

RSC...DUO | RKC...DUO

**Technical Data**

**Environmental**

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

**Mechanical**

Housing / Molded body PBT  
 Insert PBT  
 Contact CuZn, pre-coppered, CuSnZn  
 Receptacle shell CuZn, nickel plated  
 O-ring FKM  
 Mode of connection Screw terminals  
 Connectable conductor max. 0.75 mm<sup>2</sup>

**Electrical**

Contact resistance ≤ 5 mΩ  
 Nominal current at 40°C 4 A  
 Nominal voltage 4 poles 240 V  
 5 poles 60 V  
 Rated voltage 4 poles 250 V  
 5 poles 63 V  
 Test voltage 4 poles 2.0 kV eff. / 60 s  
 5 poles 1.5 kV eff. / 60 s  
 Insulation resistance > 10<sup>9</sup> Ω  
 Pollution degree 3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 4/DUO	RKC 4/DUO	4	2 x 3 mm / 2 x 5 mm	
RSC 5/DUO	RKC 5/DUO	5	2 x 3 mm / 2 x 5 mm	

Field Attachable Connectors